

Bertrand's Wish List

Gordan Krnjaic




NEXT Meeting Jan 15, 2016

Overview

- **Setup Reminder**
- **Qualitative Signal Features**
- **NaI, CsI, LAr, LXe, Si, Plastic Scintillator**


Setup Reminder

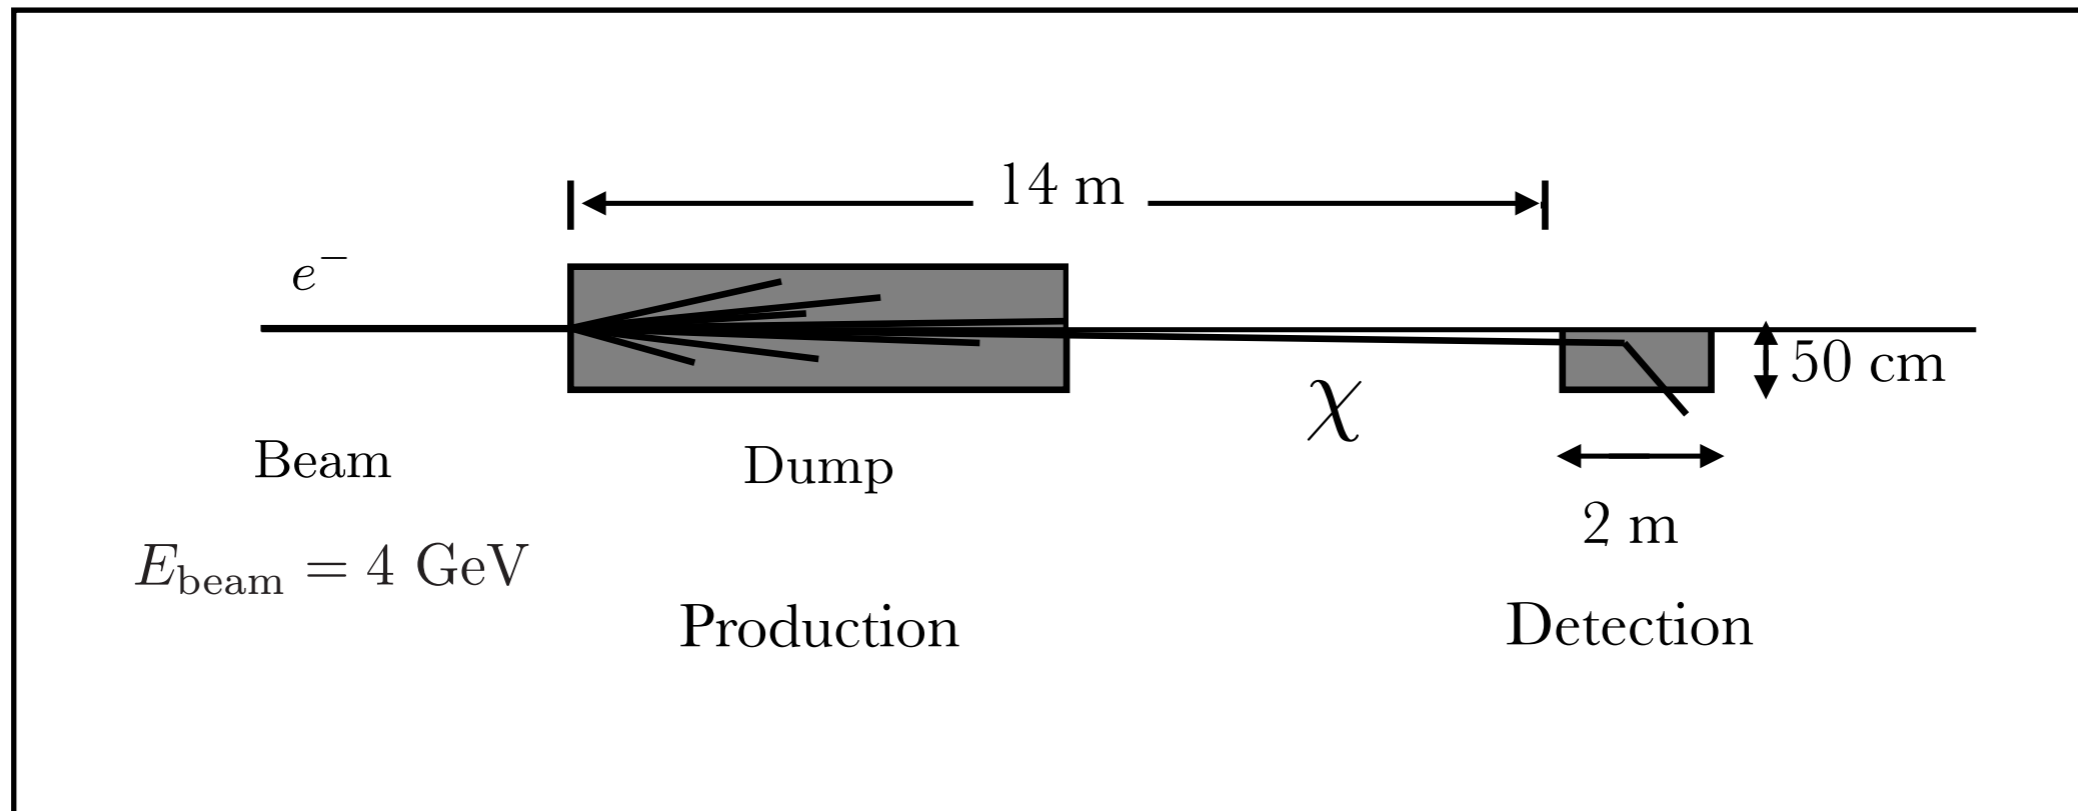

$$\mathcal{L}_{\text{dark}} = -\frac{1}{4}F'_{\mu\nu}F'^{\mu\nu} + \frac{\epsilon}{2}F'_{\mu\nu}F_{\mu\nu} + \frac{m_{A'}^2}{2}A'_\mu A'^\mu + \bar{\chi}(i\not{D} - m_\chi)\chi,$$

This talk: Rate comparison of different channels
Assuming elastic fermion DM scattering

Electron Recoils: Signal Characteristics

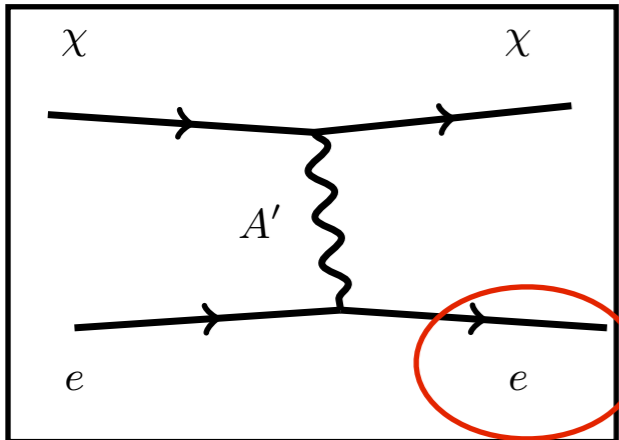

$$\frac{d\sigma}{dE_e} \simeq \frac{4\pi\epsilon^2\alpha\alpha_D [2m_e(E_\chi^2 - E_\chi E_e) - m_\chi^2 E_e]}{E^2 (m_{A'}^2 + 2m_e E_e)^2}$$


Flat & Forward Peaked

$$\cos \theta_e = \frac{E_\chi E_R - m_e(E_\chi + m_e - E_R)}{\sqrt{(E_\chi^2 - m_\chi^2)(E_R^2 - m_e^2)}}$$


$$\cos \theta_e (E_{\chi,R} \gg m_e) \rightarrow \frac{E_\chi E_R}{E_\chi E_R} - \mathcal{O}\left(\frac{m_e}{E_\chi}\right) \approx 1$$

beam dump limit: light target, fast projectile $\theta_e \approx 0$

Nucleon Recoils: Signal Characteristics

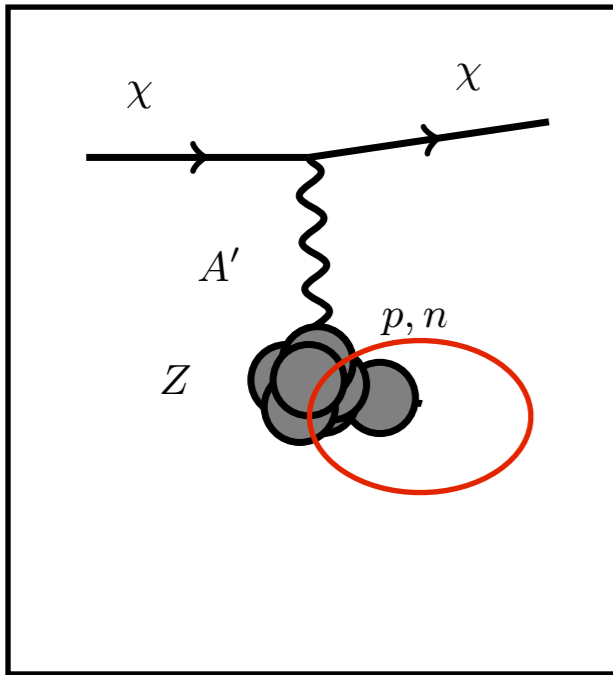

$$\cos \theta_n = \frac{E_\chi E_R - m_n (E_\chi + m_n - E_R)}{\sqrt{(E_\chi^2 - m_\chi^2)(E_R^2 - m_n^2)}}$$

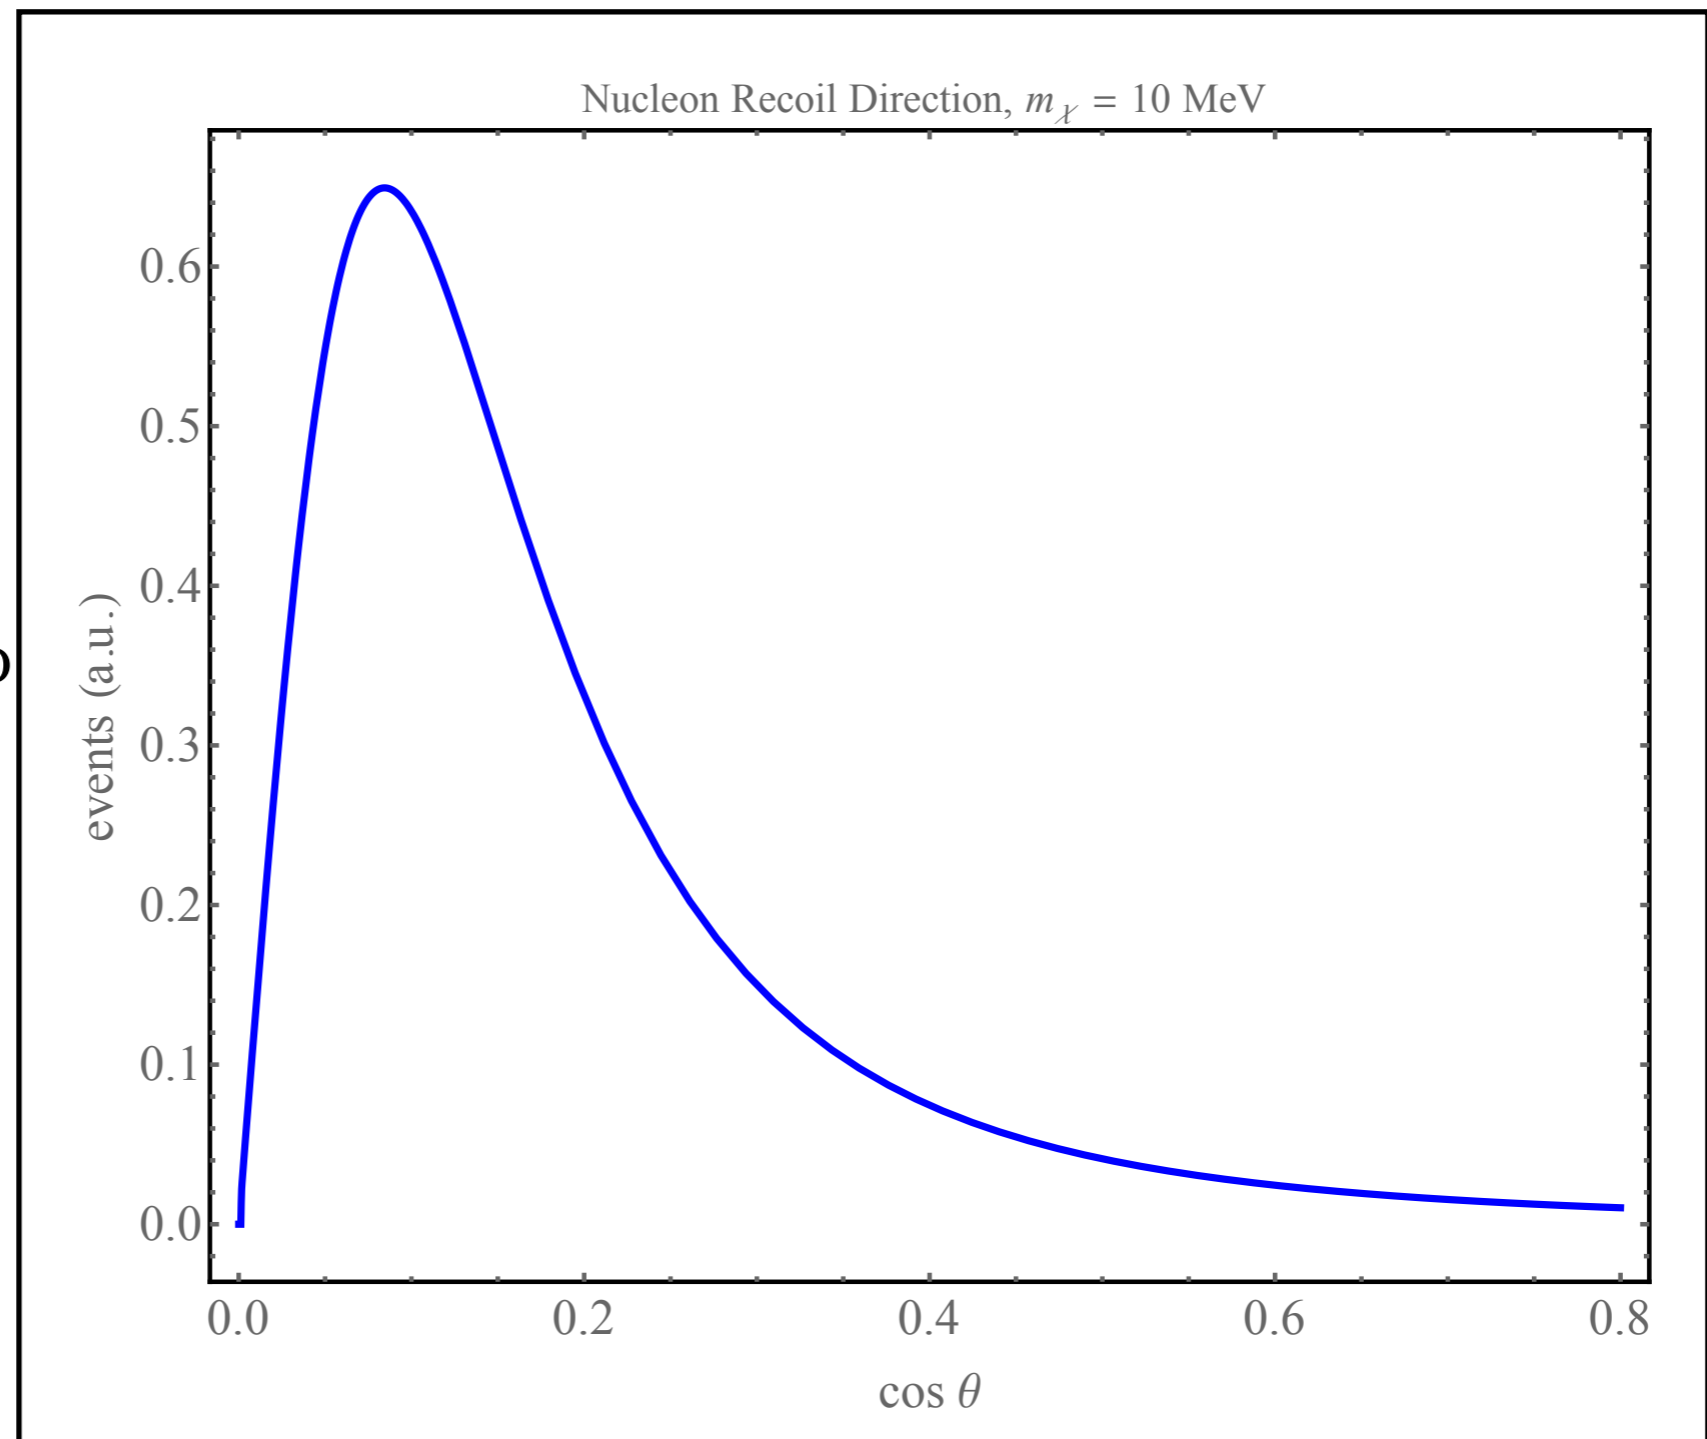


Relevant scales overlap

Nontrivial angular distribution

More orthogonal than electron recoils

Nucleon Recoils: Signal Characteristics

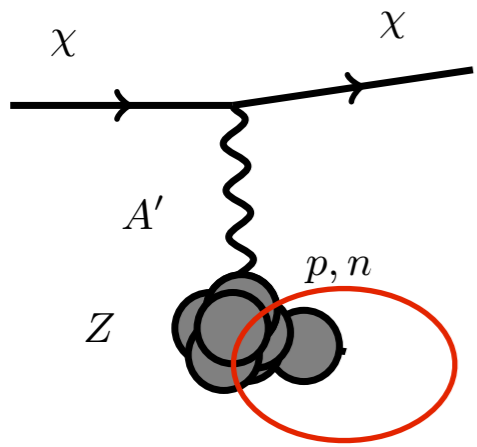

$$\frac{d\sigma}{dQ^2} \simeq (4\pi\epsilon^2\alpha\alpha_D) \frac{F_{1,N}^2 - \frac{Q^2}{4m_N^2} F_{2,N}^2(Q^2)}{[m_A^2 + Q^2]^2}$$

$$F_{1,p} = \frac{1}{(1 + Q^2/m_p^2)^2}$$

$$F_{2,p} = \frac{1.79}{(1 + Q^2/m_p^2)^2}$$

Distribution “breaks” near $Q^2 \sim m_{A'}^2 \implies T_{N,\text{knee}} \sim \frac{m_{A'}^2}{2m_p}$


For benchmarks $m_{A'} = 3 \text{ MeV}, 30 \text{ MeV}, 150 \text{ MeV}$

$T_{N,\text{knee}} \sim 5 \text{ keV}, 0.5 \text{ MeV}, 12 \text{ MeV}$

To account for quasi-elastic binding effect, shift by $\sim \mathbf{O(\text{MeV})}$

Coherent: Signal Characteristics

Most scattering is “glancing”

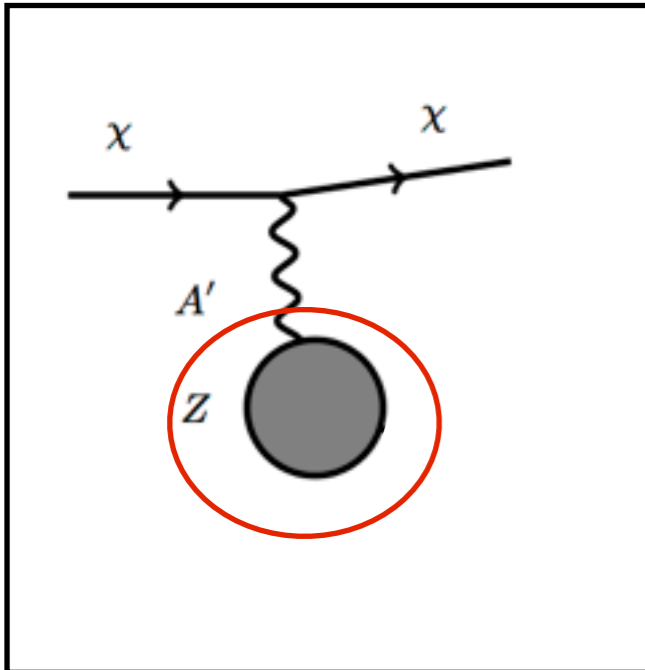

$$\cos \theta_N = \frac{E_\chi E_R - m_N (E_\chi + m_N - E_R)}{\sqrt{(E_\chi^2 - m_\chi^2)(E_R^2 - m_N^2)}}$$



lab-frame scattering angle

$$\cos \theta_N (m_N \gg E_\chi) \rightarrow \sqrt{\frac{E_R - m_N}{E_R + m_N}} \approx \frac{v_N}{c}$$

$$\theta_N \approx 90^\circ$$

beam dump limit (heavy target)


Coherent: Signal Characteristics

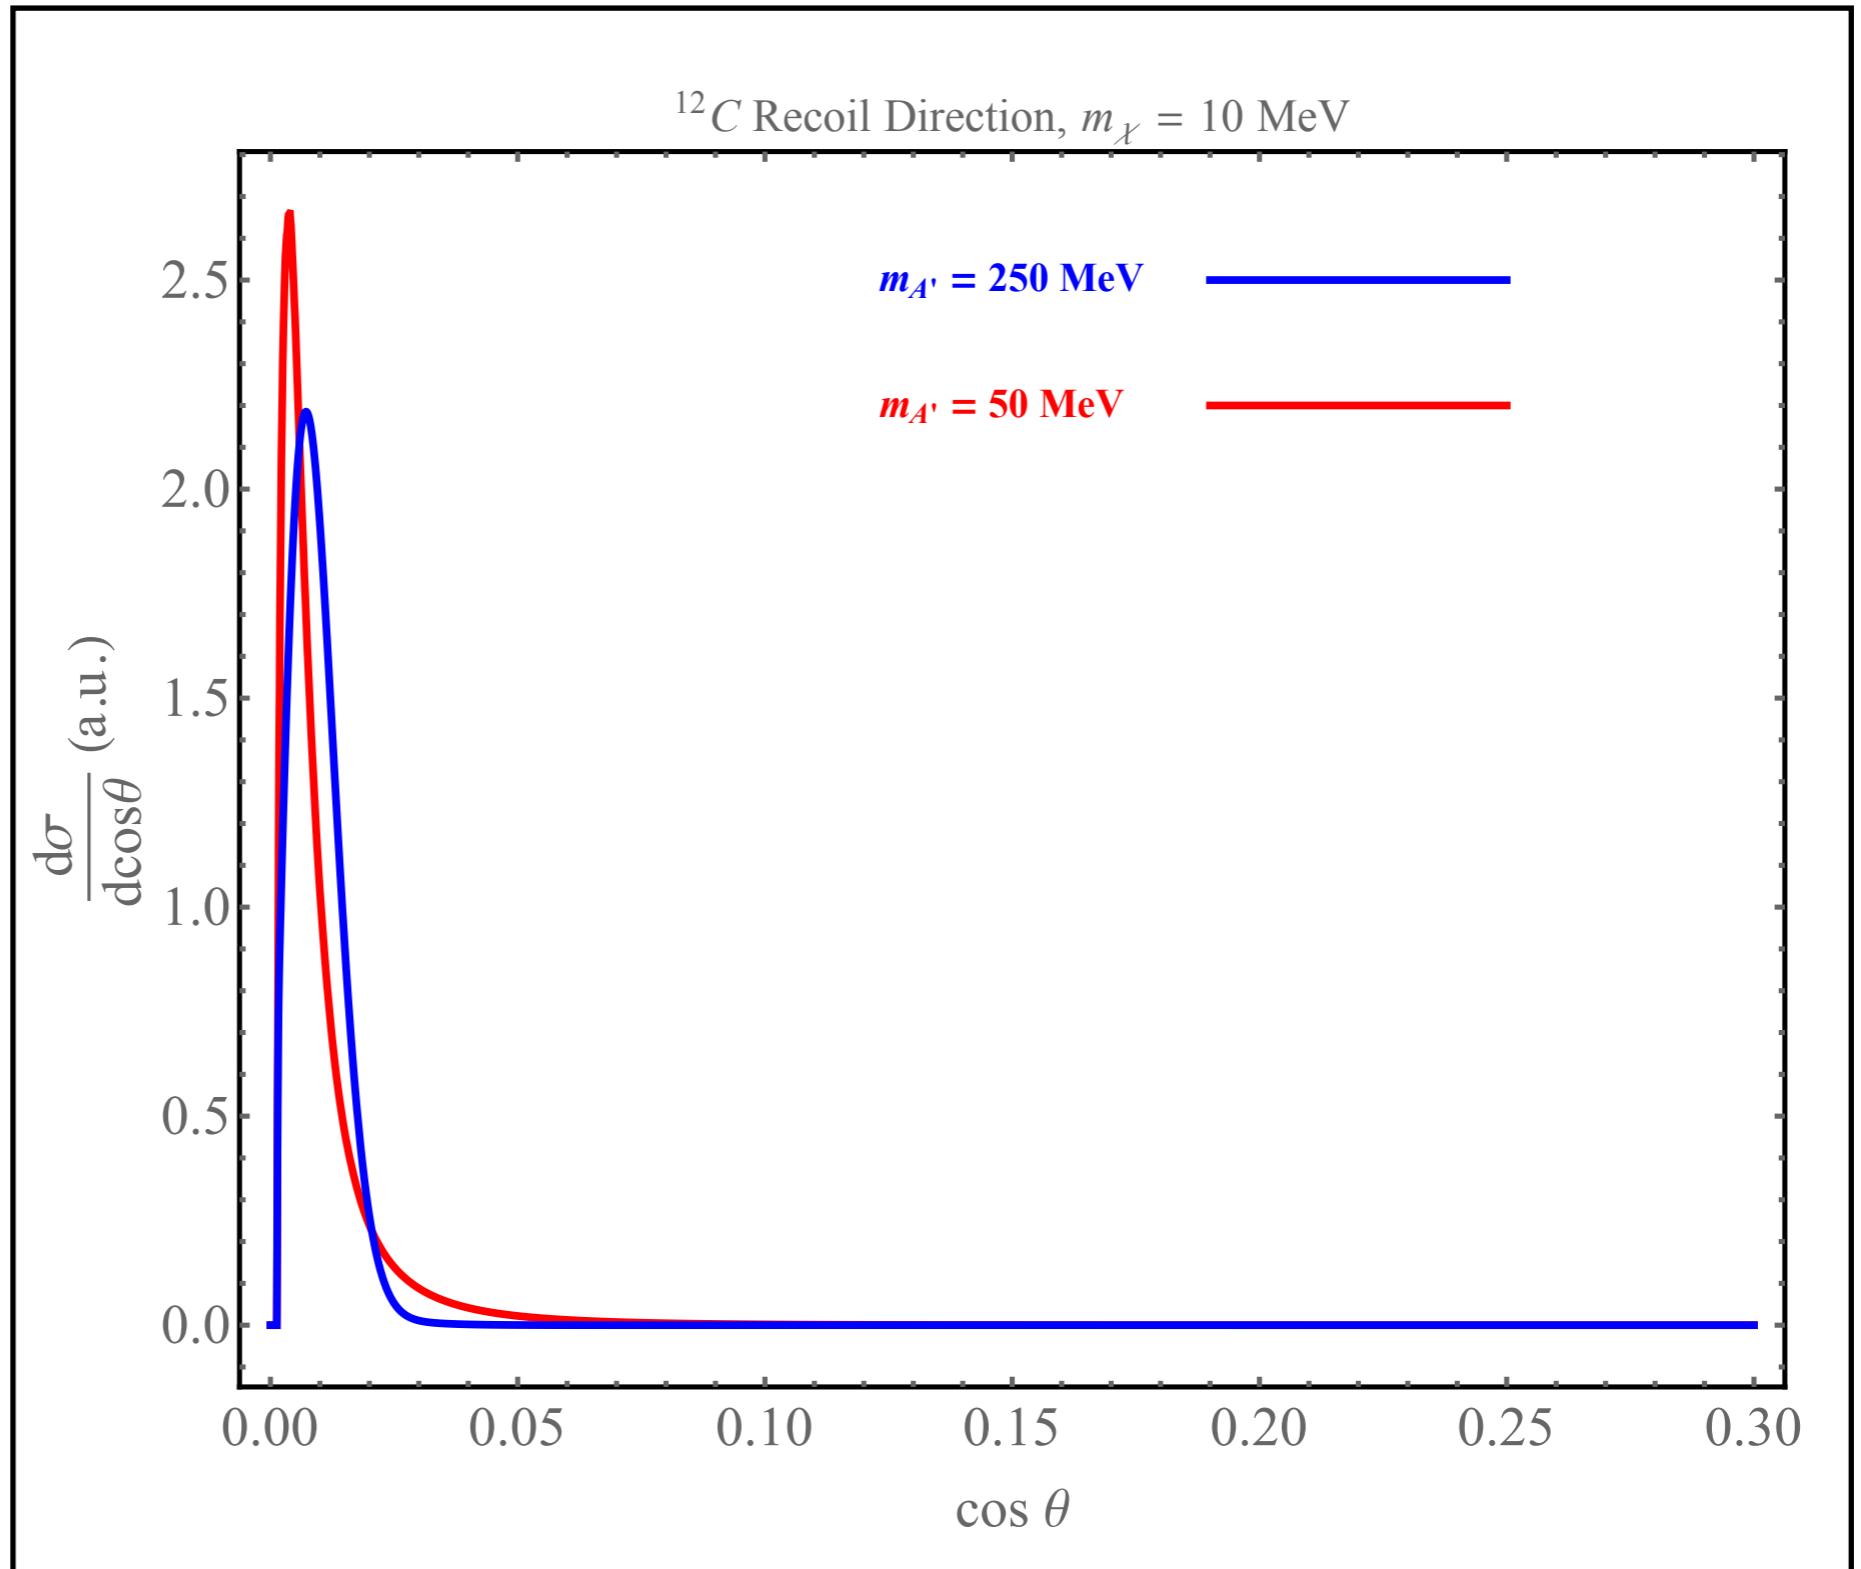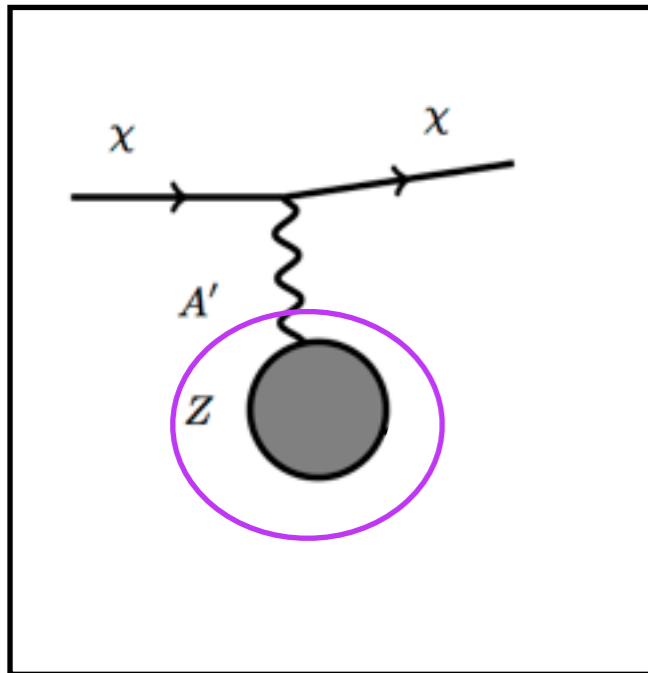

Difference due DM production variation for different mediator masses

Coherent: Signal Characteristics

Differential Cross Section

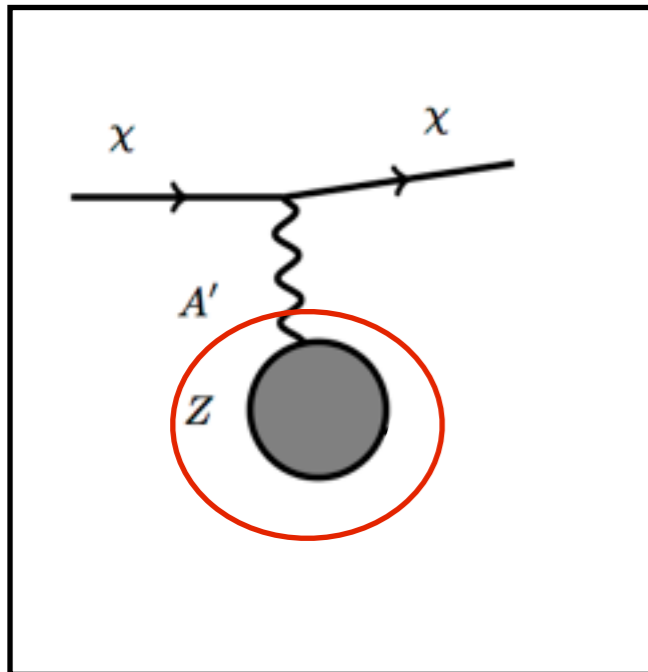

$$\frac{d\sigma}{dQ^2} \simeq (4\pi\epsilon^2\alpha\alpha_D) \frac{G_{\text{Tsai}}}{[m_{A'}^2 + Q^2]^2}$$

$$T_{\text{Knee}} \sim \frac{m_{A'}^2}{2m_{\text{Nucleus}}}$$

Tsai Form Factor
(with atomic form factor)

$$G_{2,el}(t) = \left(\frac{a^2 t}{1 + a^2 t} \right)^2 \left(\frac{1}{1 + t/d} \right)^2 Z^2$$


$$d = 0.164 \text{ GeV}^2 A^{-2/3}$$

$$a = 111 Z^{-1/3} / m_e$$

e.g. Carbon 12

$$m_{A'} = 3 \text{ MeV}, 30 \text{ MeV}, 150 \text{ MeV}$$
$$T_{N,\text{knee}} \sim 0.4 \text{ keV}, 40 \text{ keV}, 1 \text{ MeV}$$


Cross Section vs. Threshold, CsI

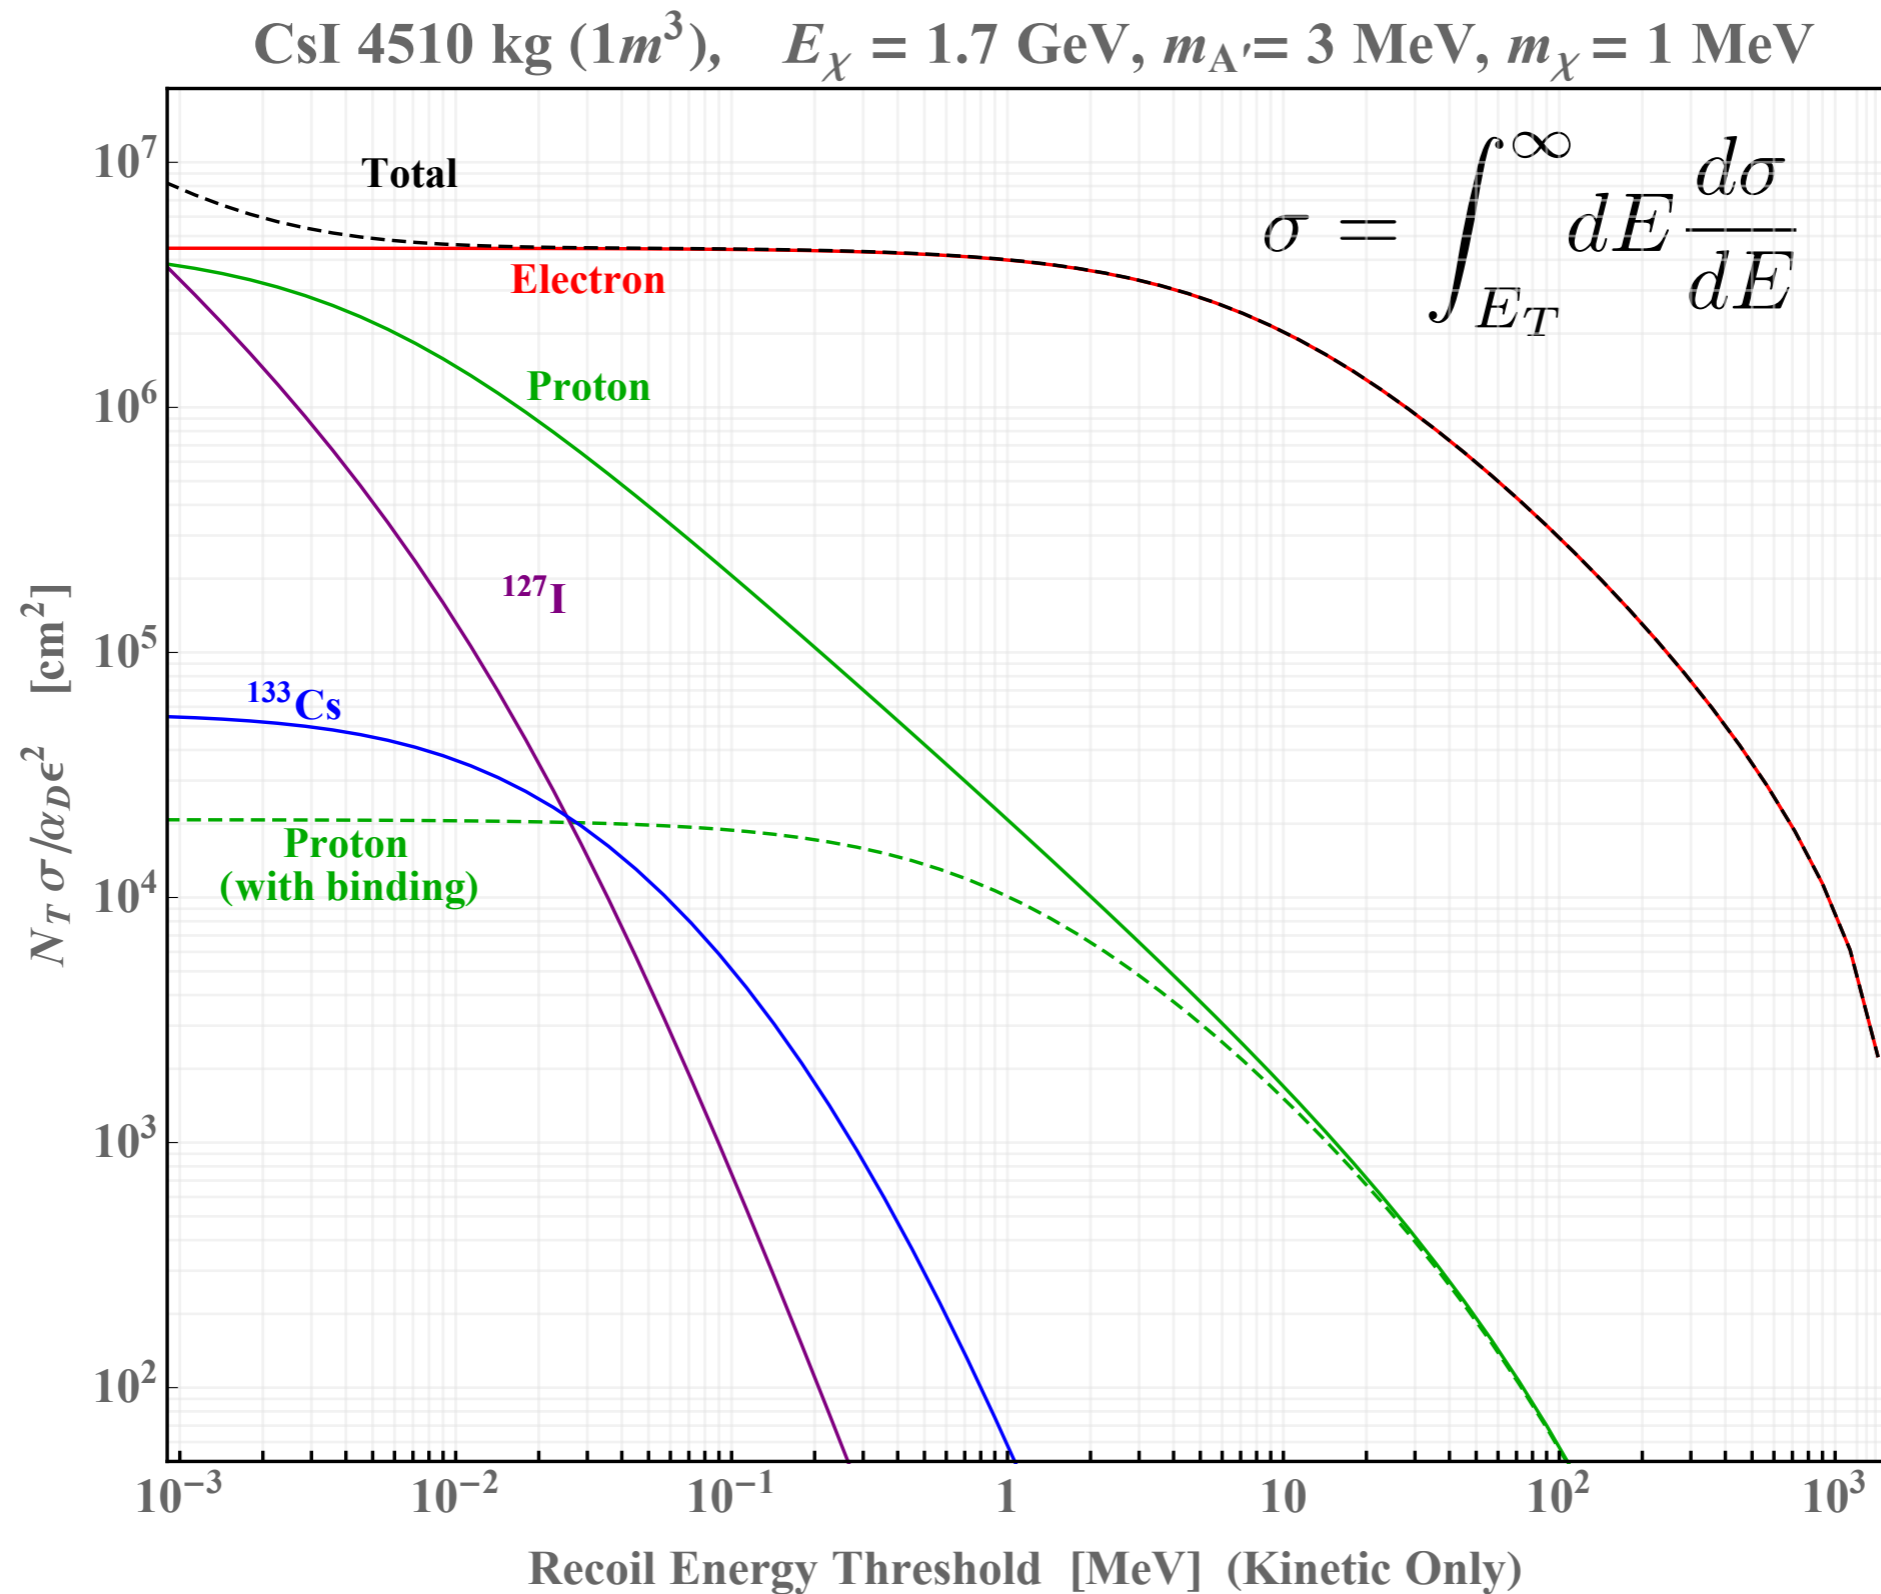

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above

Cross Section vs. Threshold, CsI


CsI 4510 kg ($1m^3$), $E_\chi = 1.7$ GeV, $m_{A'} = 30$ MeV, $m_\chi = 1$ MeV

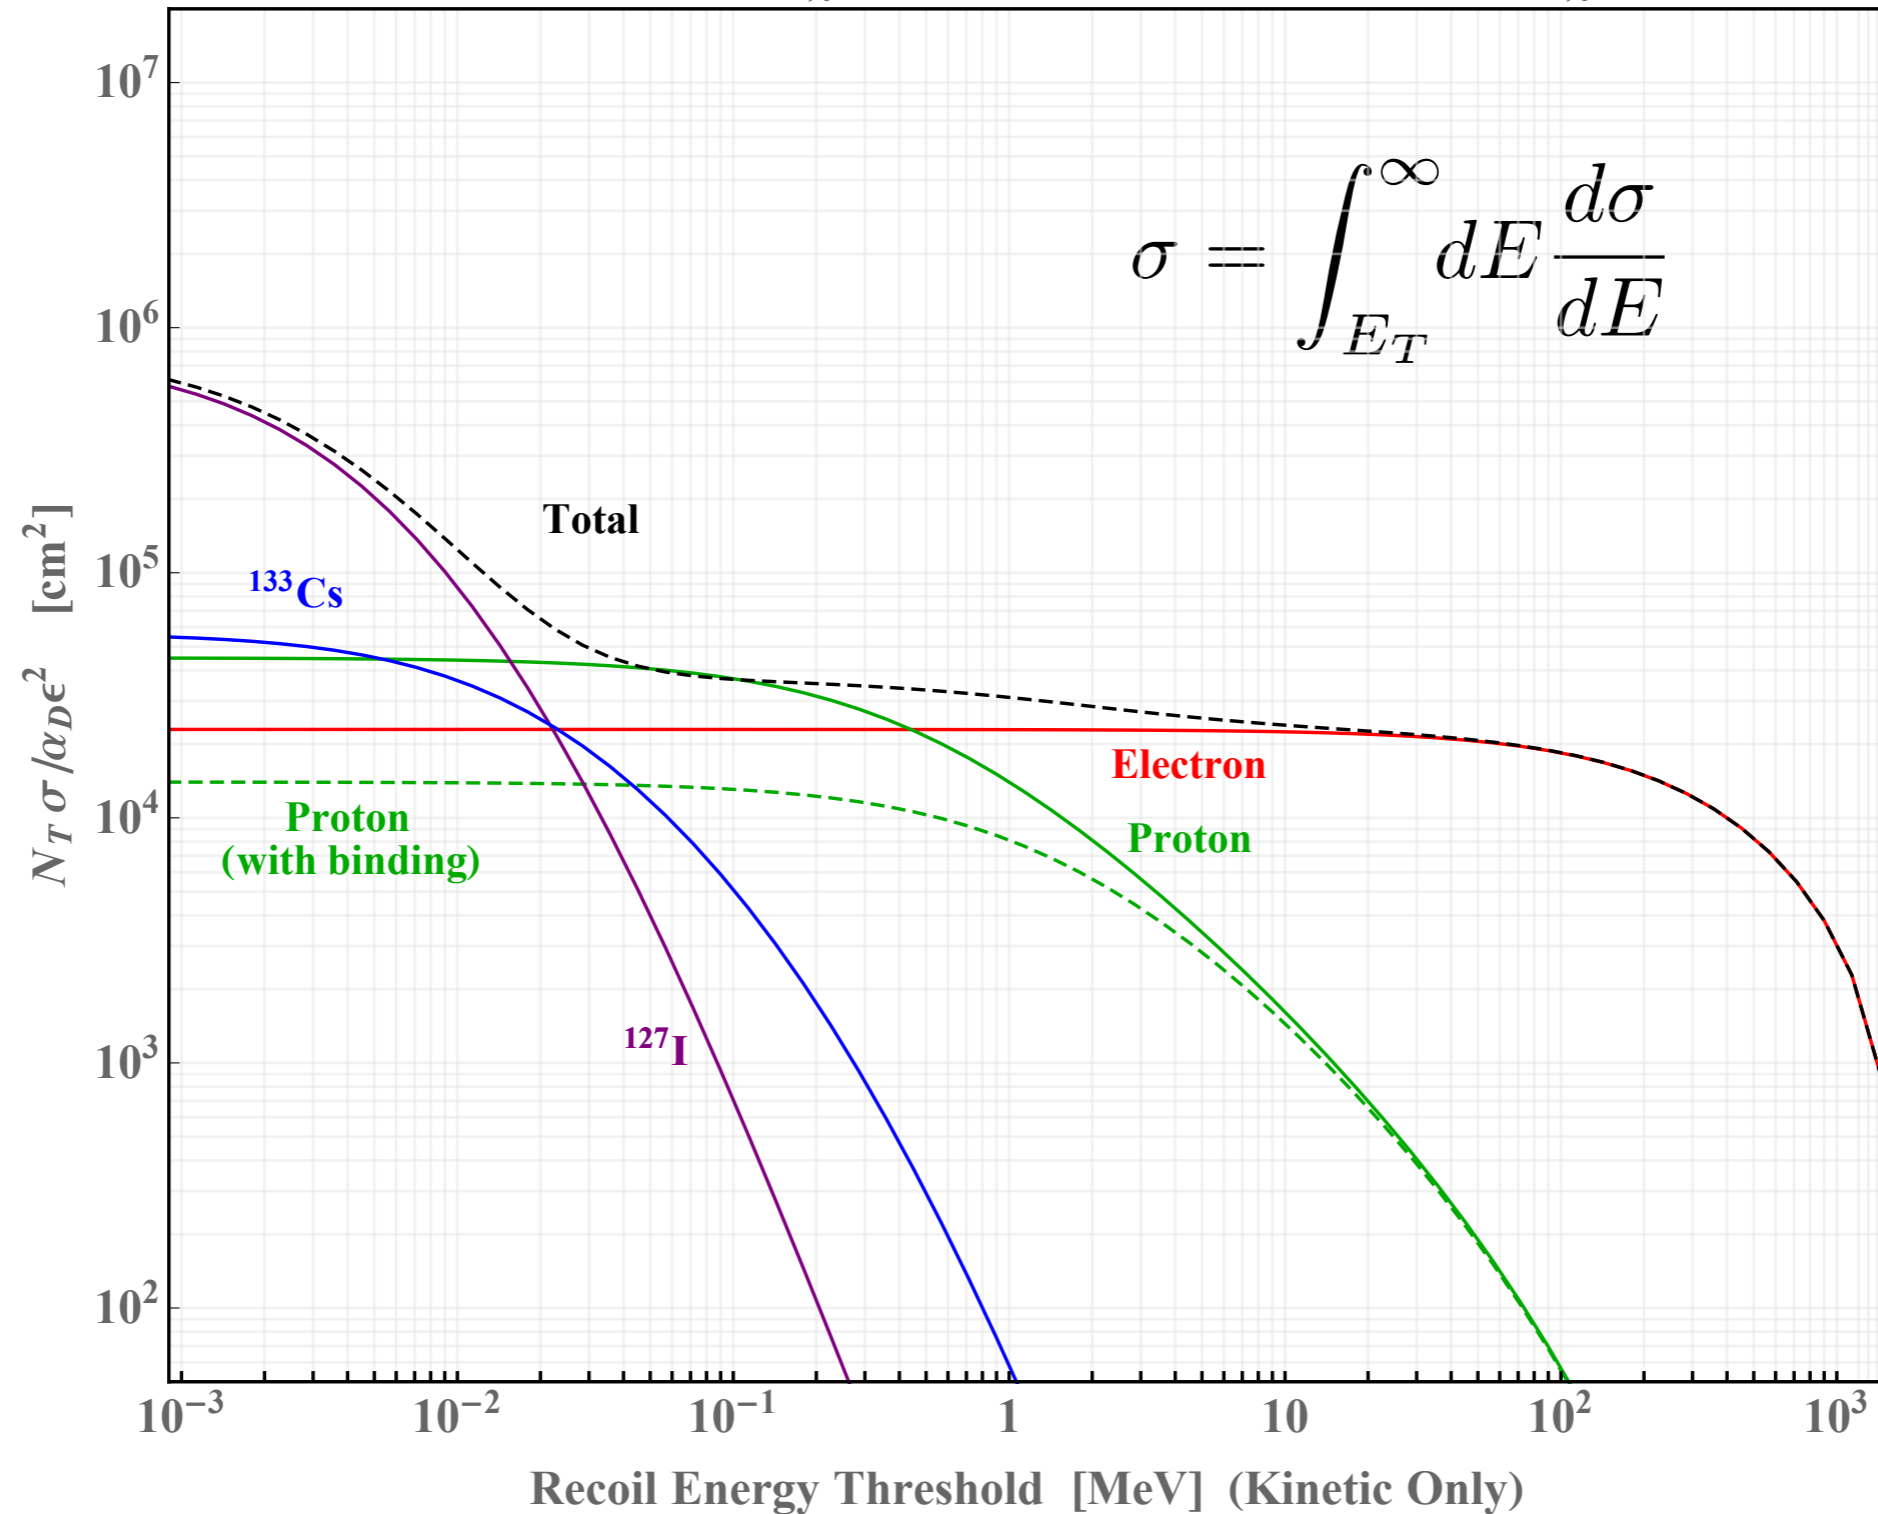

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above


Cross Section vs. Threshold, CsI

CsI 4510 kg ($1m^3$), $E_\chi = 1.7$ GeV, $m_{A'} = 150$ MeV, $m_\chi = 1$ MeV

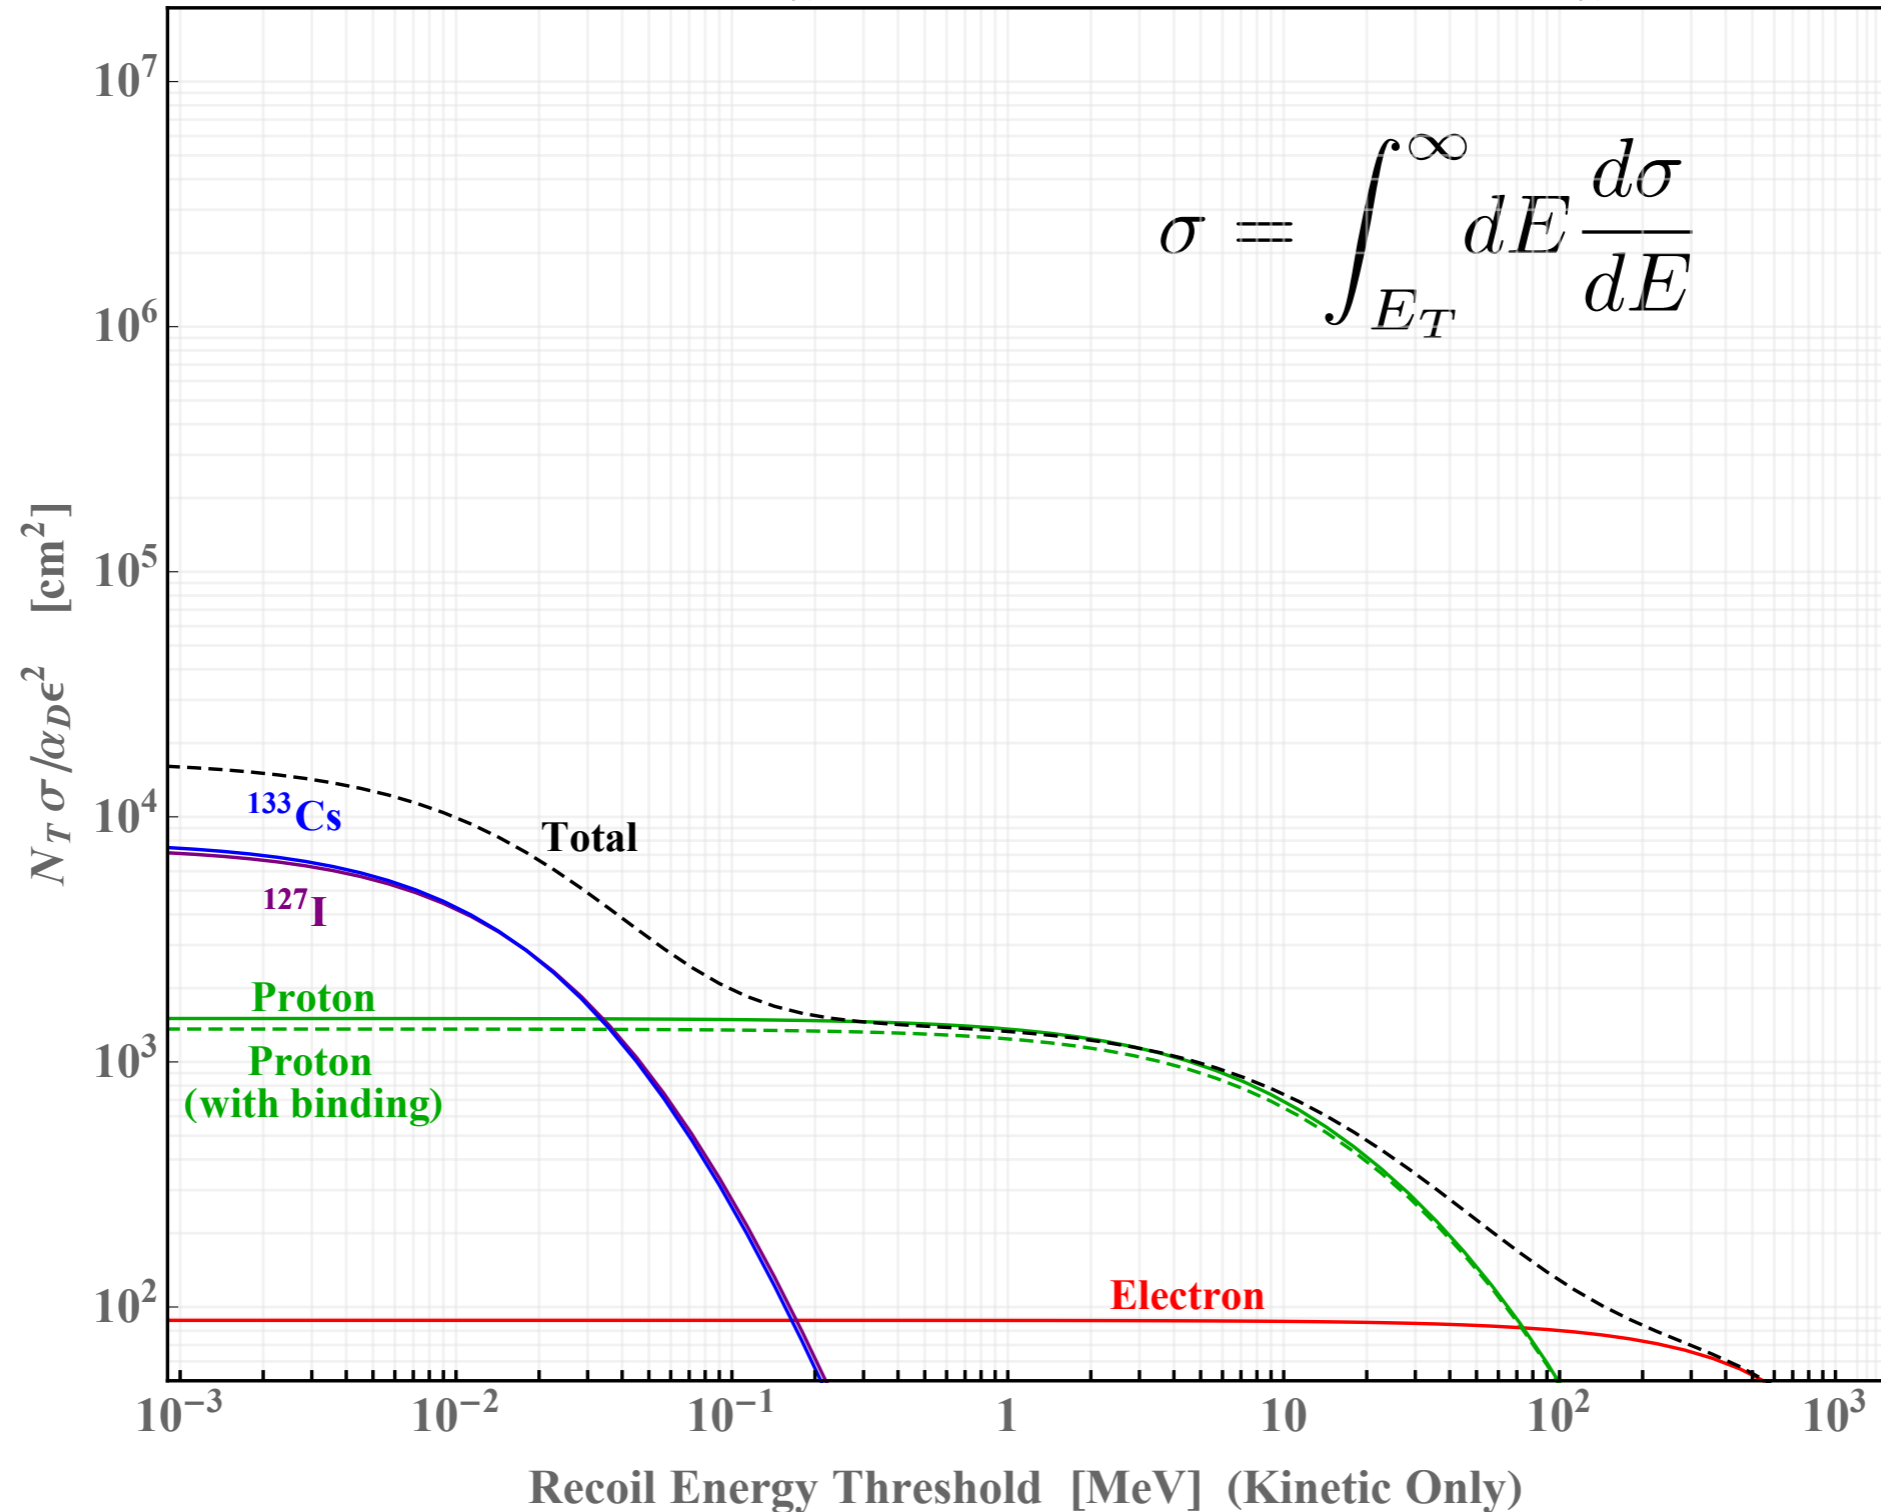

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above


Cross Section vs. Threshold, NaI

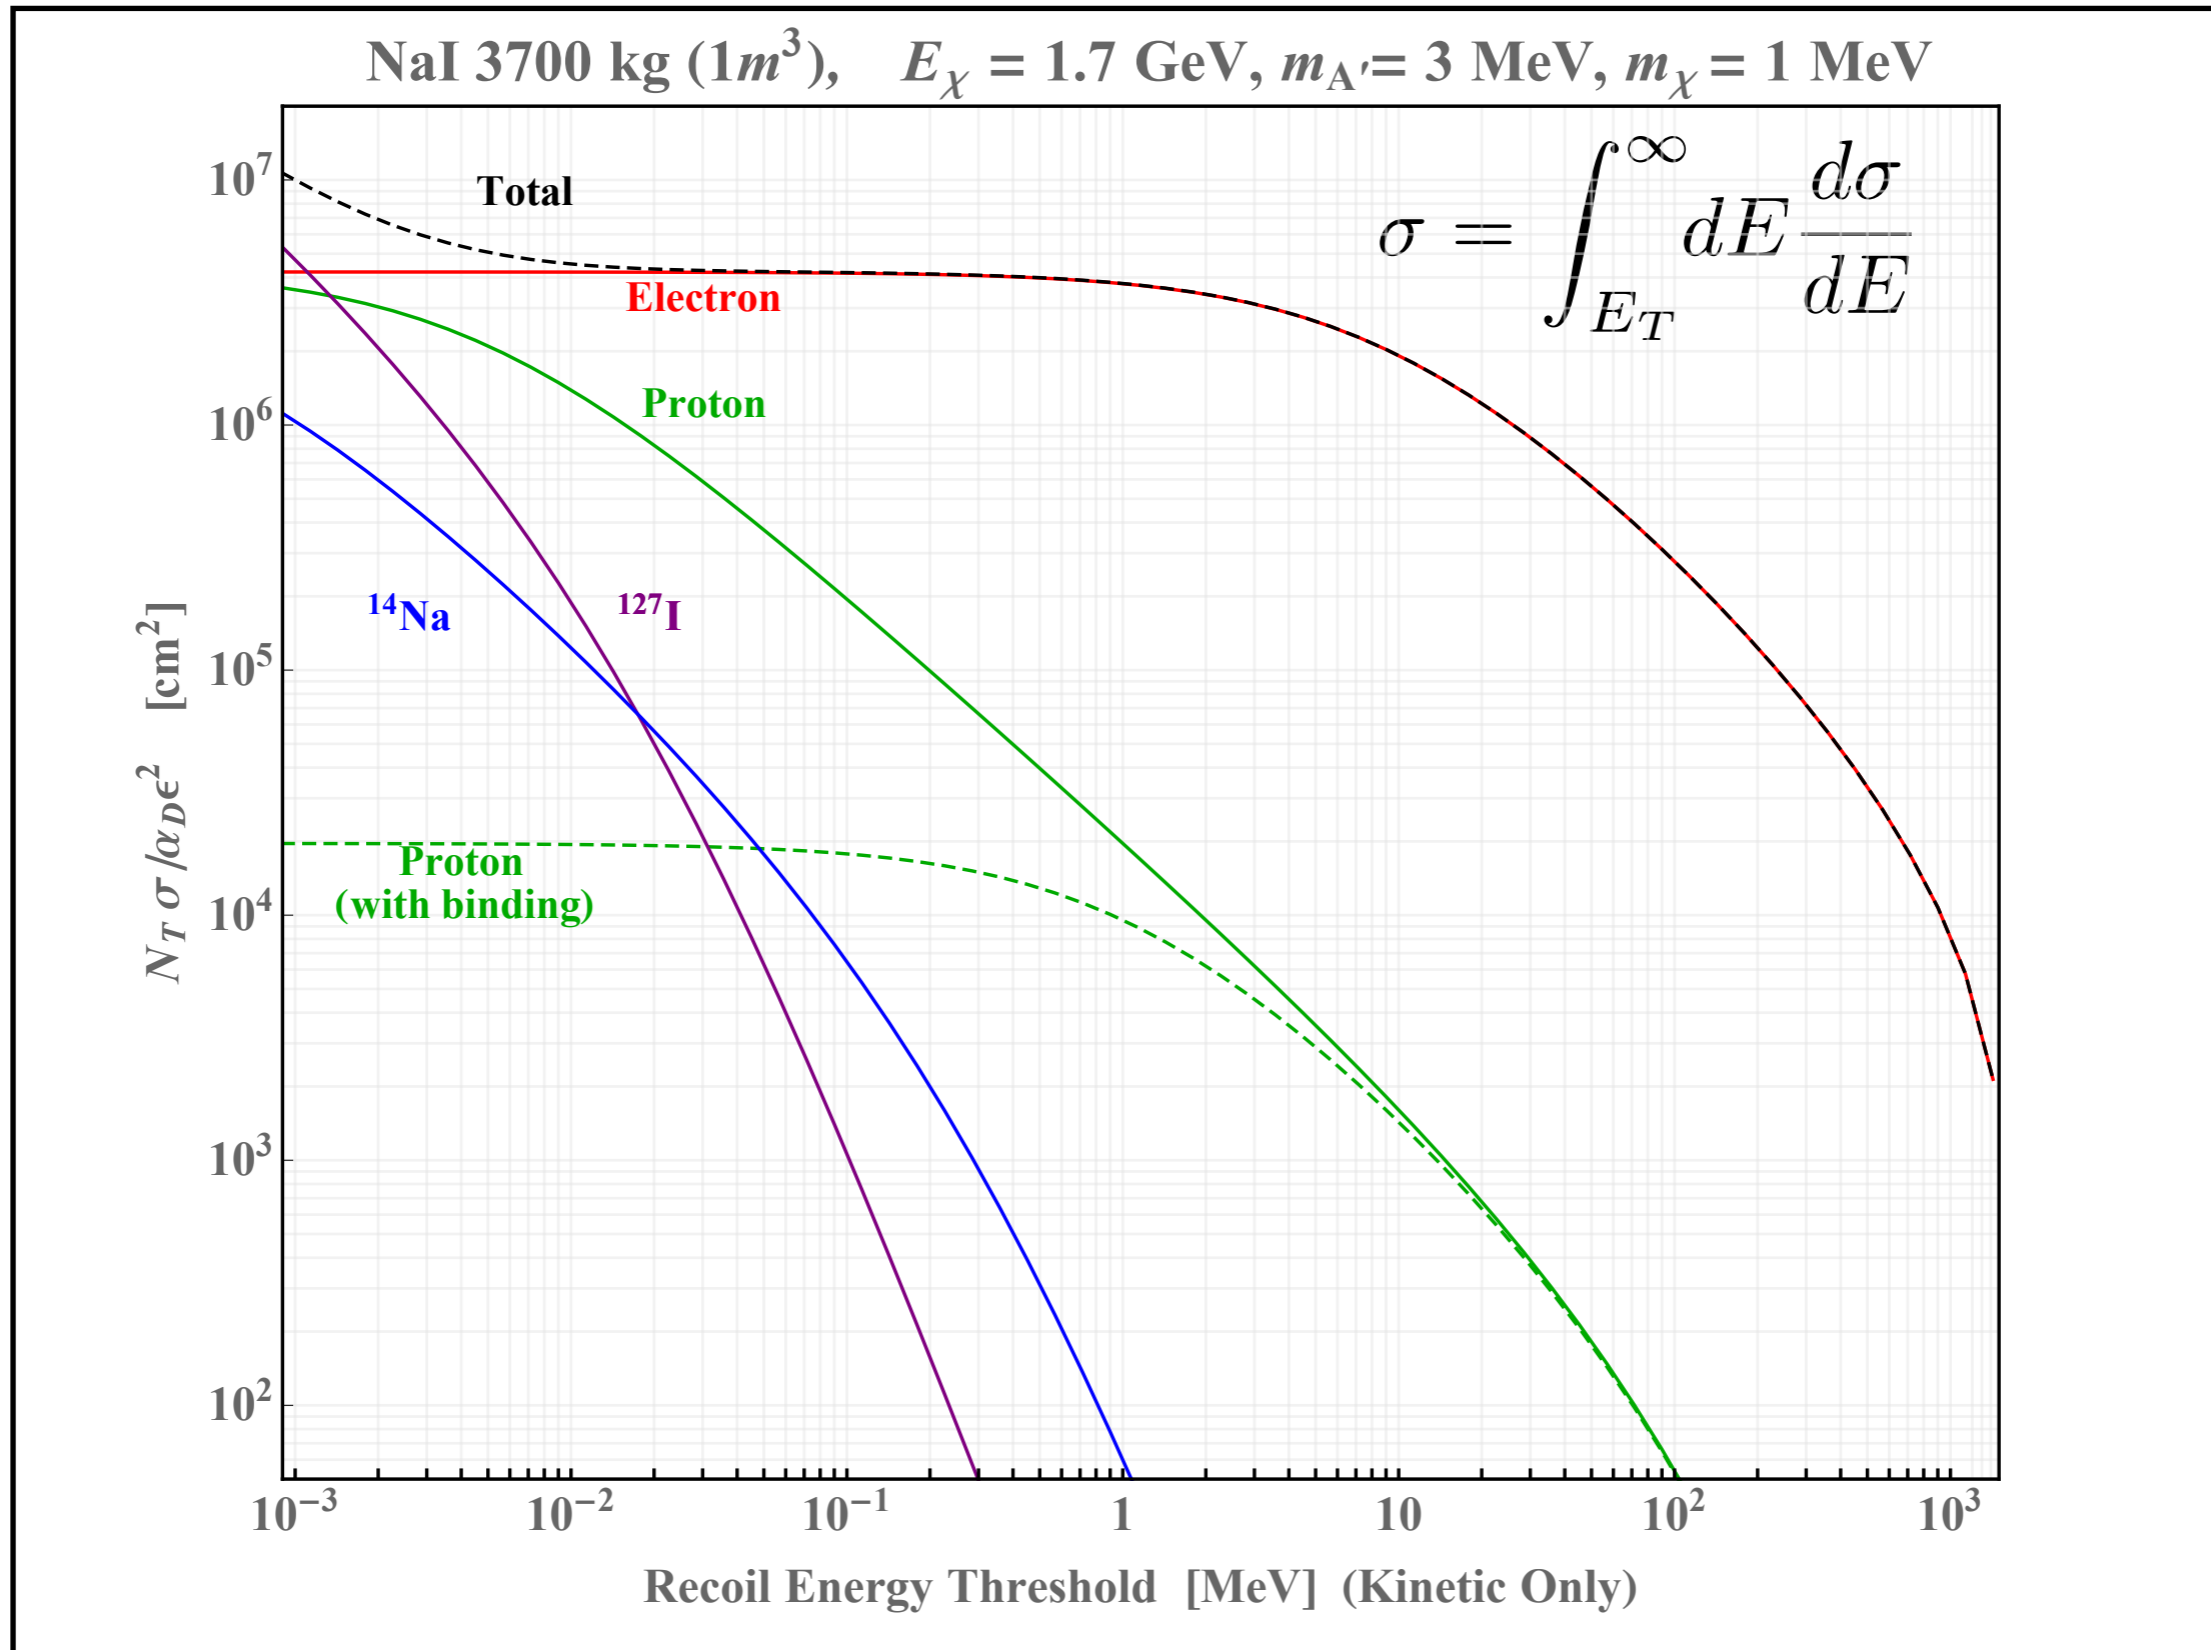

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above

Cross Section vs. Threshold, NaI


NaI 3700 kg ($1m^3$), $E_\chi = 1.7$ GeV, $m_{A'} = 30$ MeV, $m_\chi = 1$ MeV

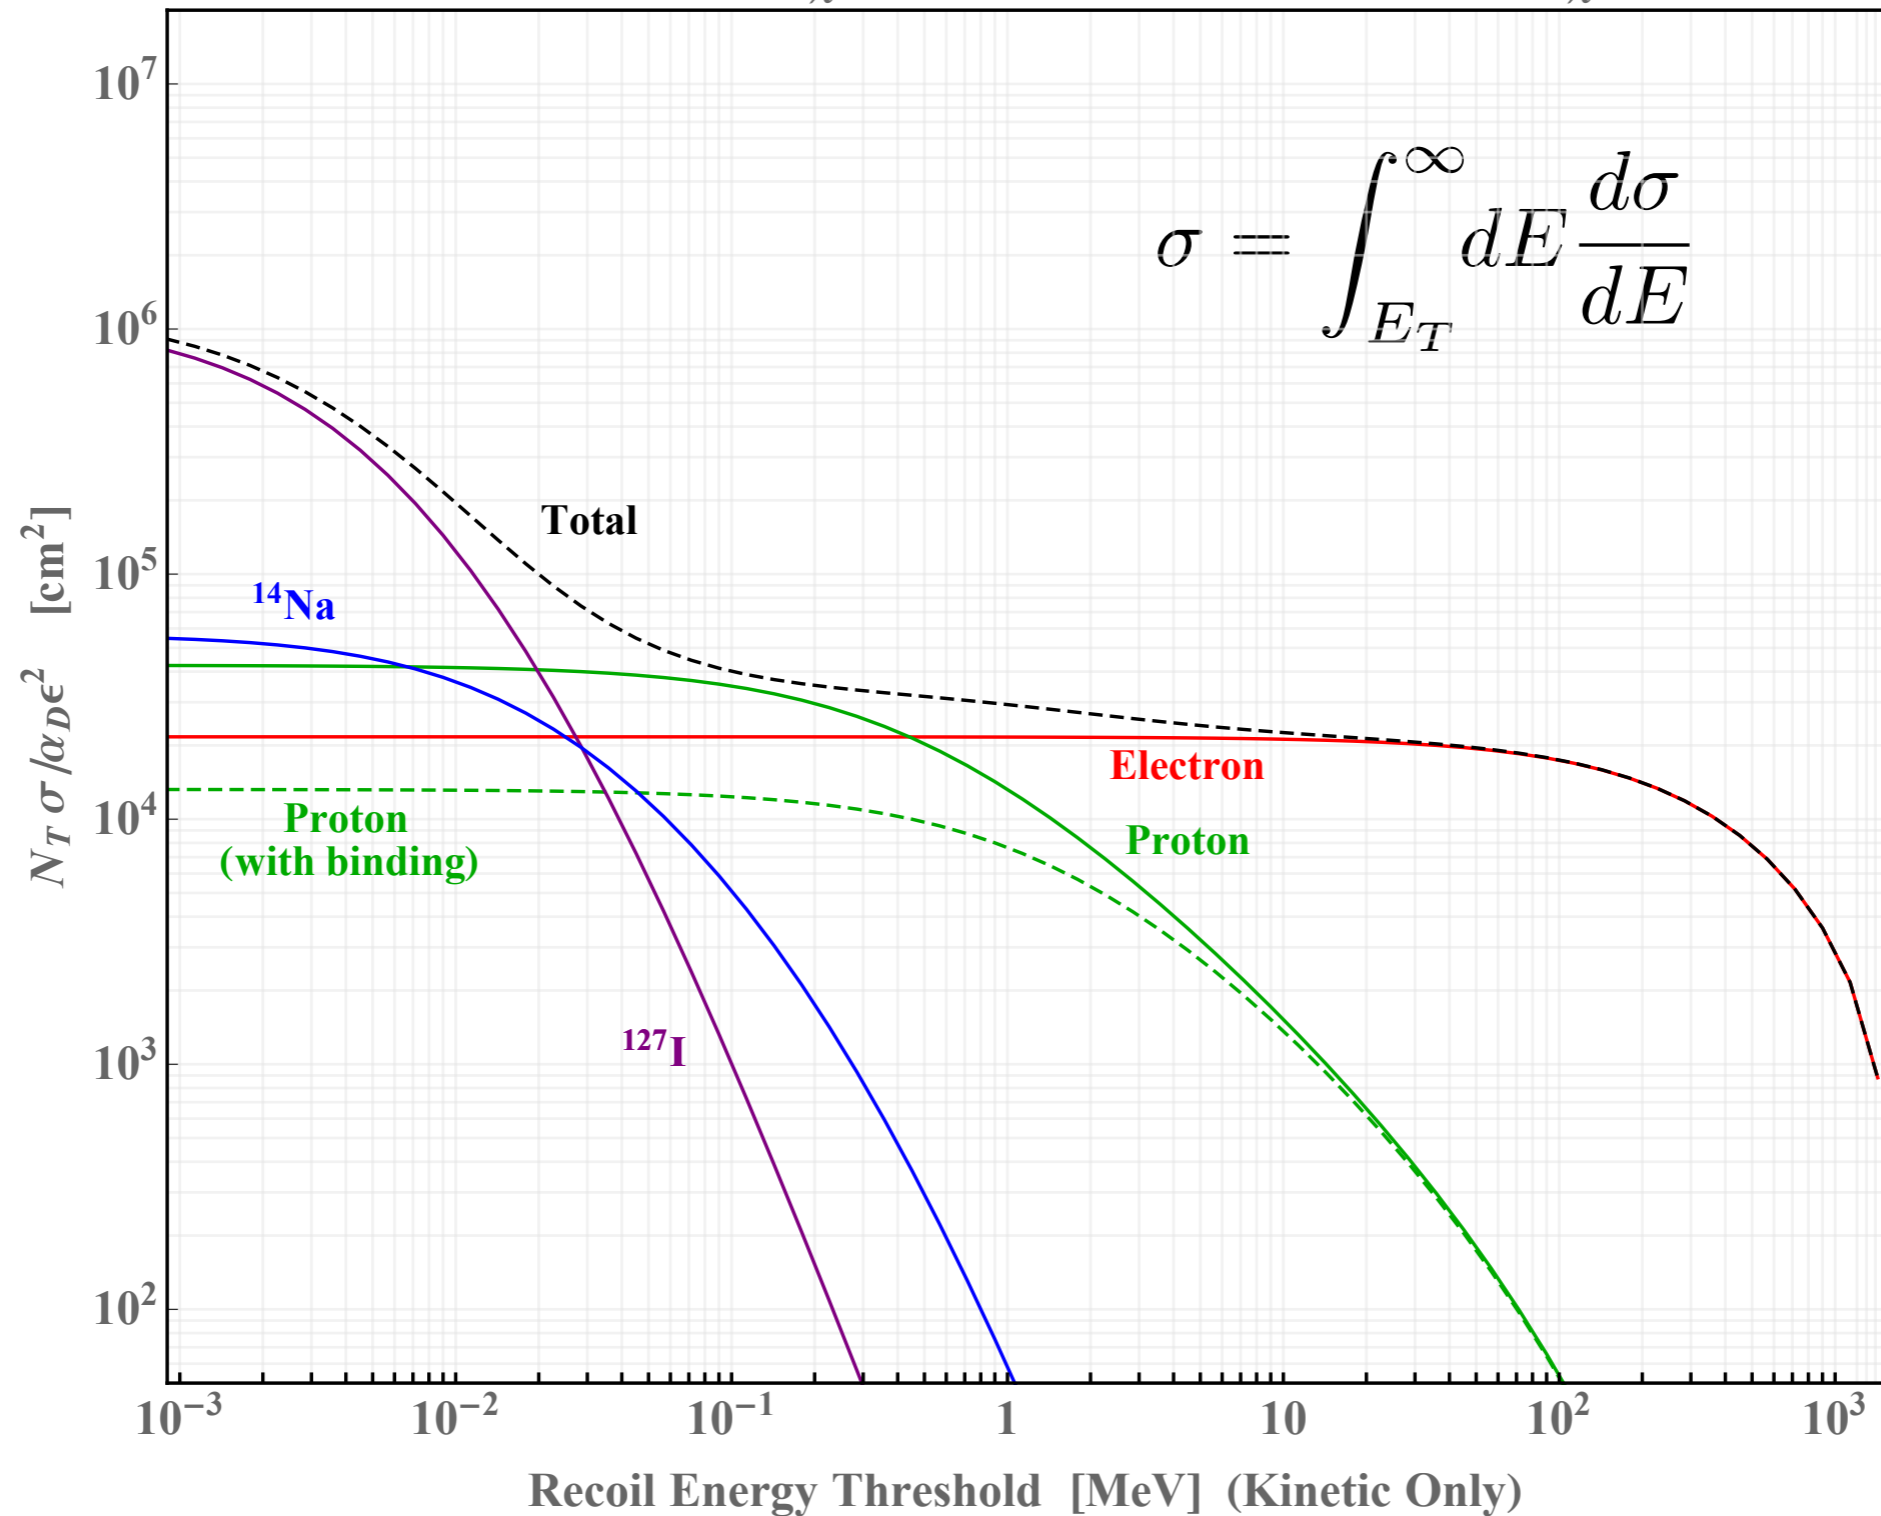

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above

Cross Section vs. Threshold, NaI


NaI 3700 kg ($1m^3$), $E_\chi = 1.7$ GeV, $m_{A'} = 150$ MeV, $m_\chi = 1$ MeV

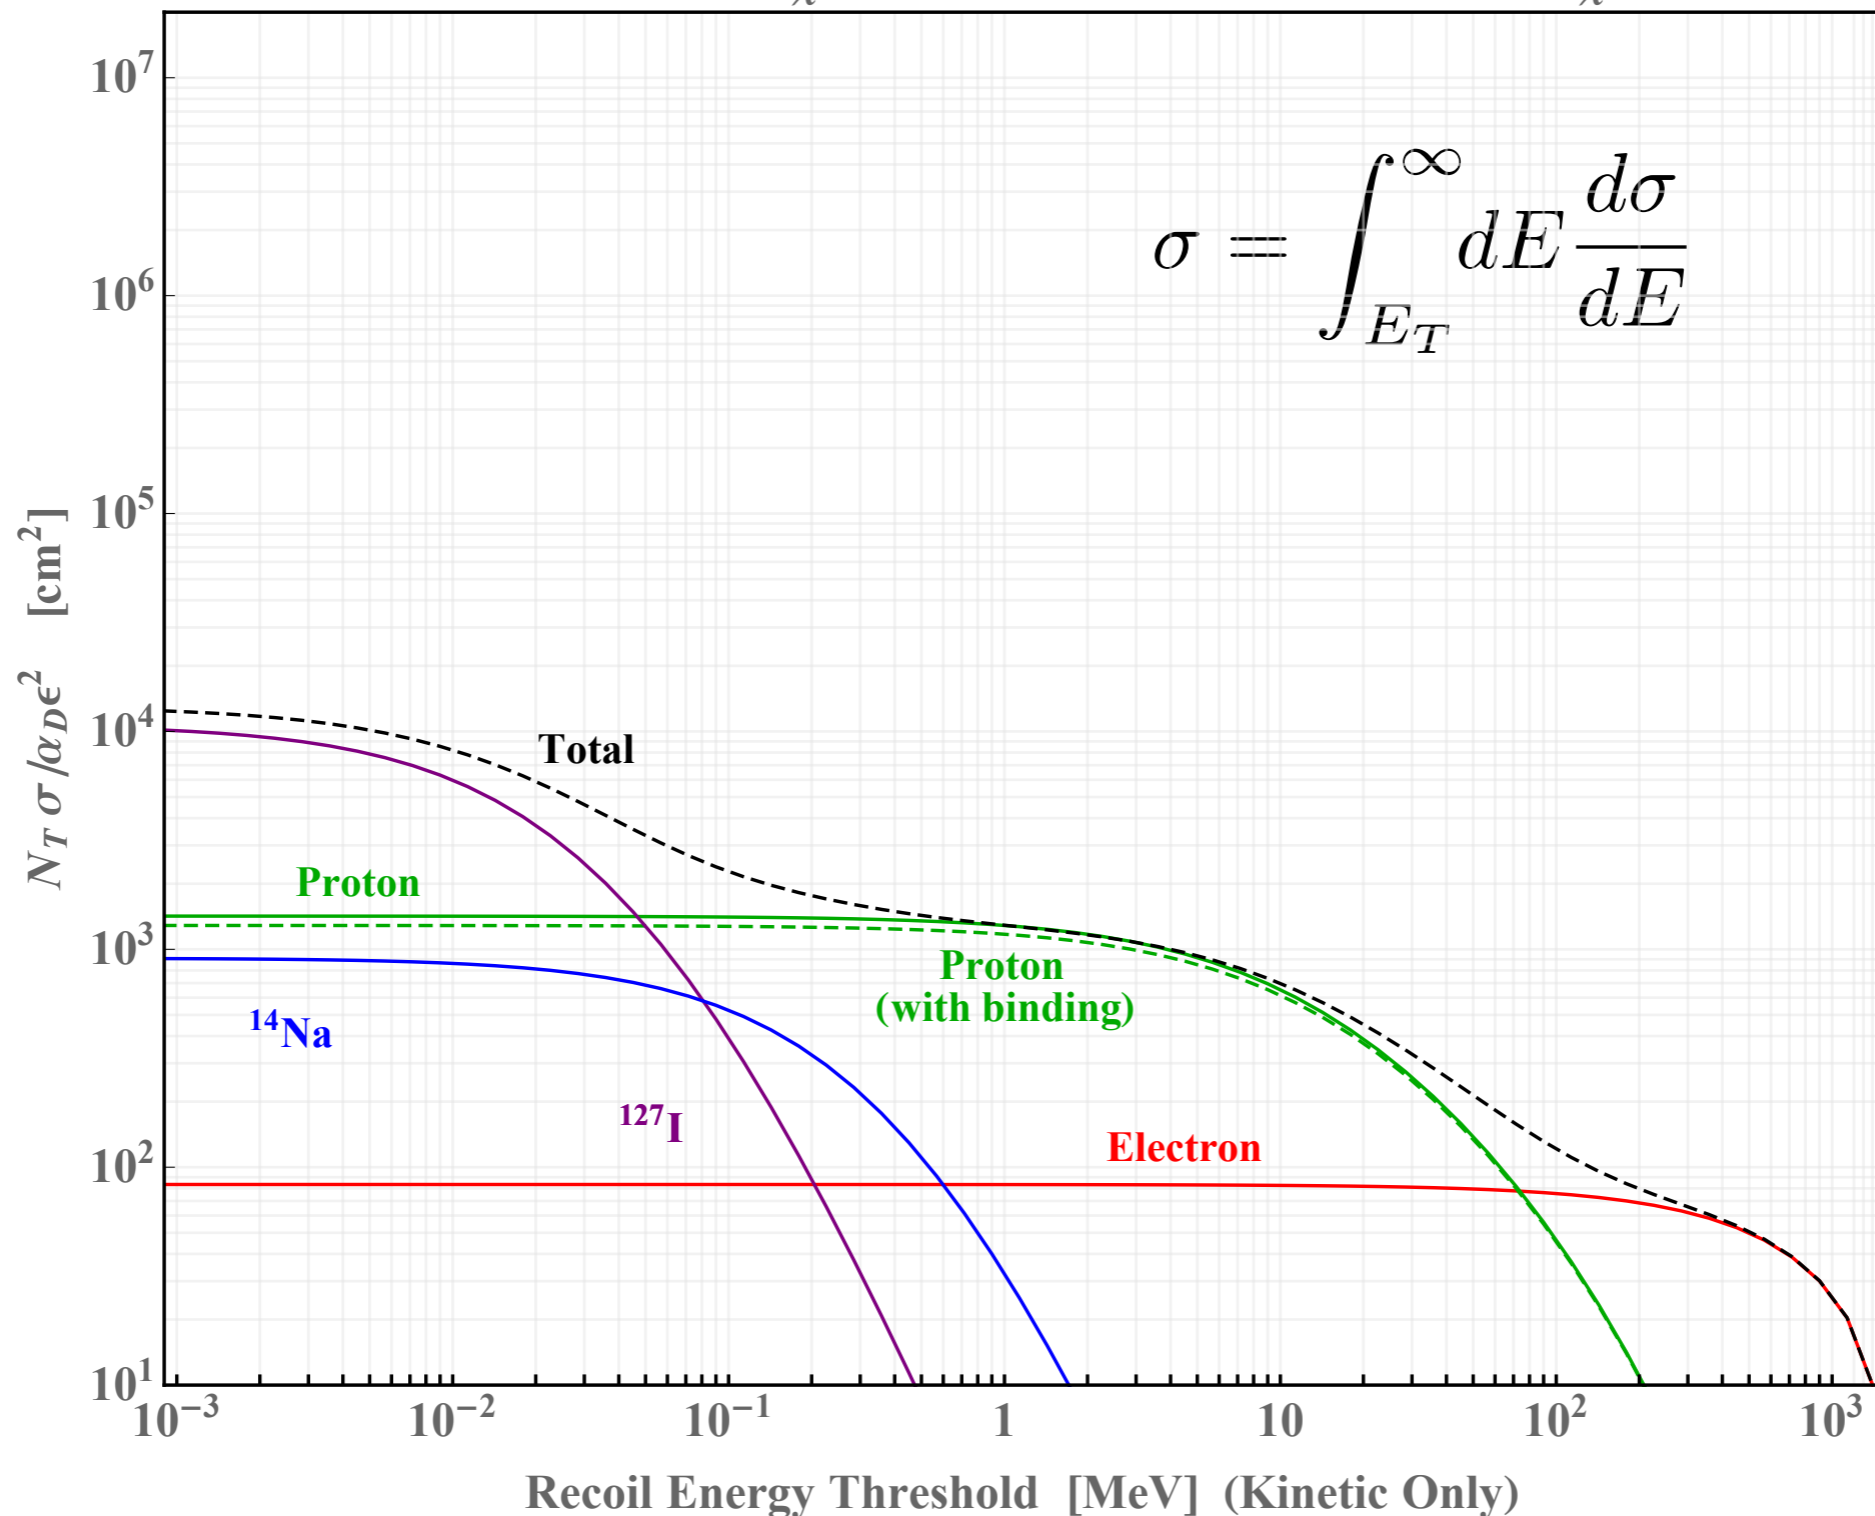

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above

Cross Section vs. Threshold, LAr


LAr 907.2 kg (1 ton), $E_\chi = 1.7$ GeV, $m_A = 3$ MeV, $m_\chi = 1$ MeV

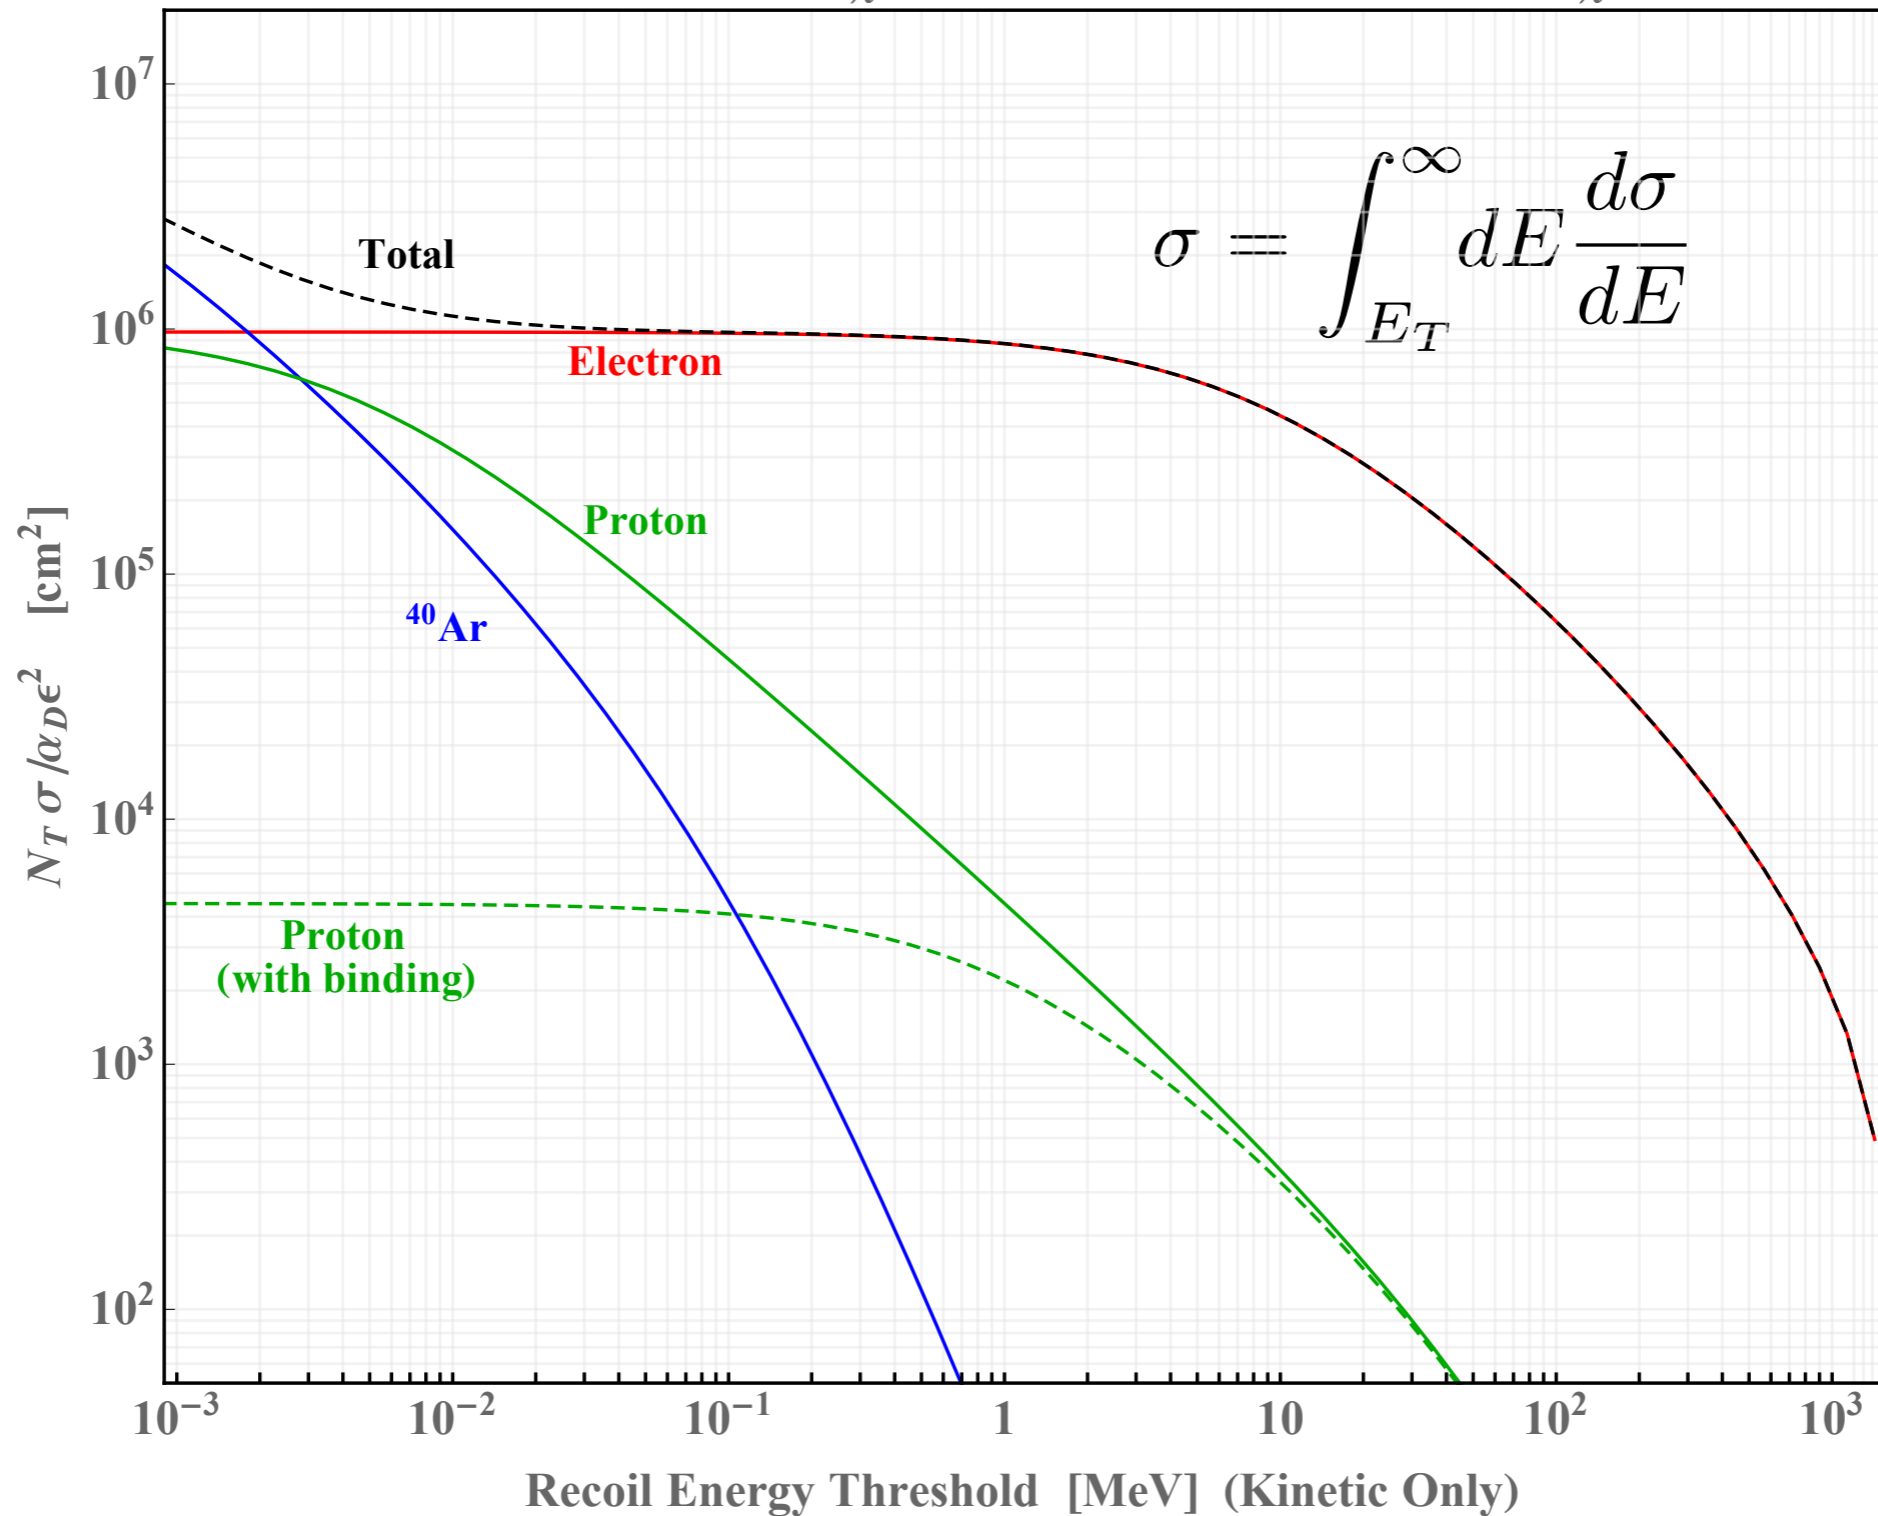

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above

Cross Section vs. Threshold, LAr


LAr 907.2 kg (1 ton), $E_\chi = 1.7$ GeV, $m_{A'} = 30$ MeV, $m_\chi = 1$ MeV

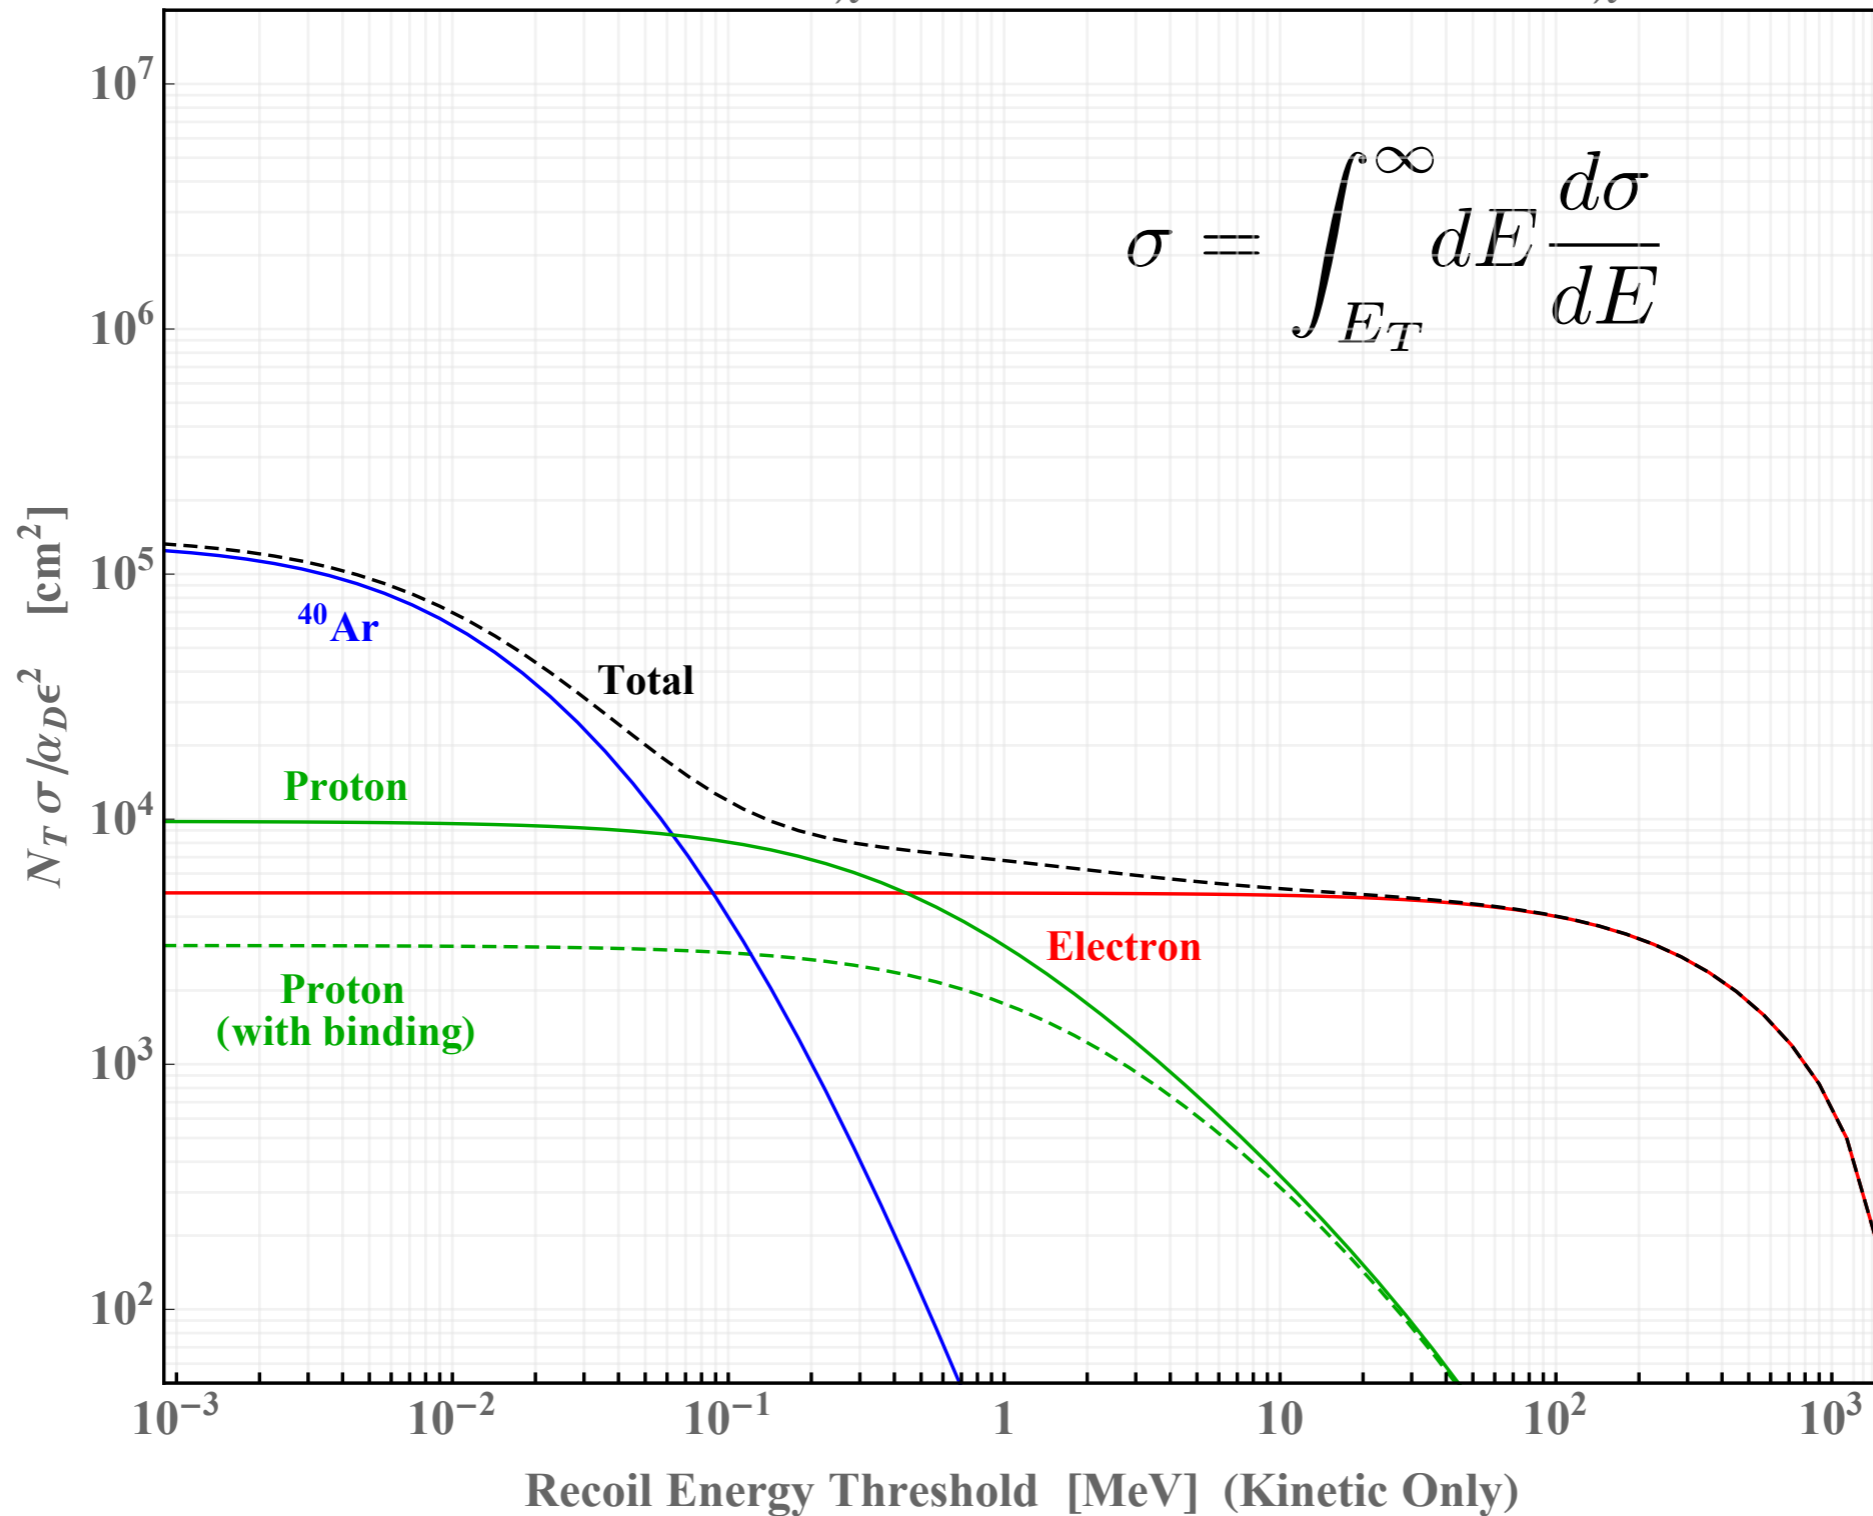

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above


Cross Section vs. Threshold, LAr

LAr 907.2 kg (1 ton), $E_\chi = 1.7$ GeV, $m_{\Lambda'} = 150$ MeV, $m_\chi = 1$ MeV

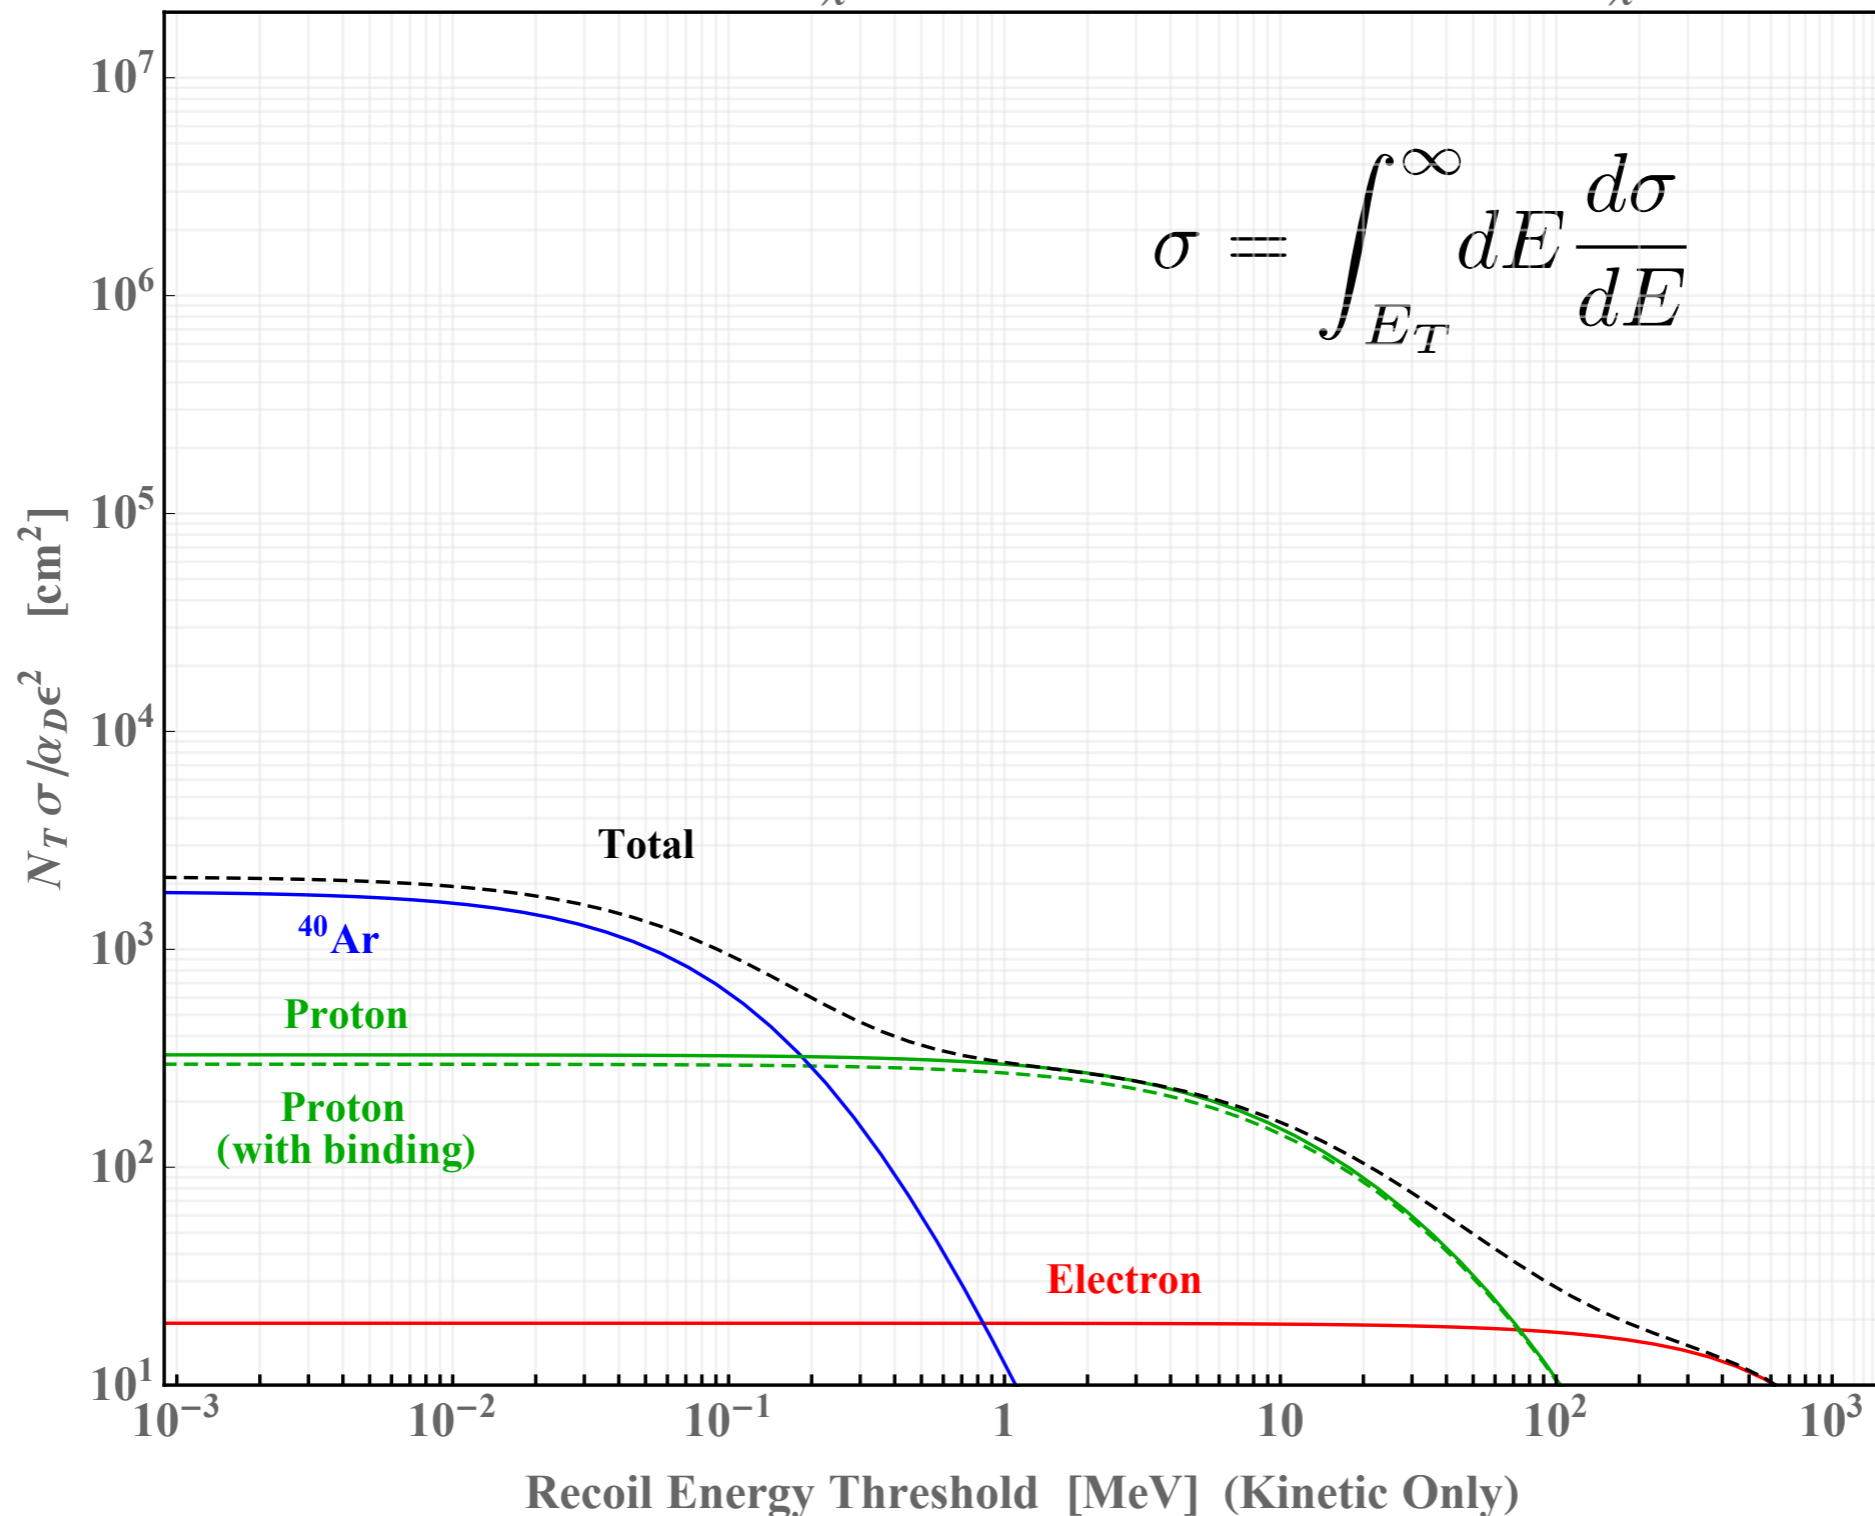

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above


Cross Section vs. Threshold, LXe

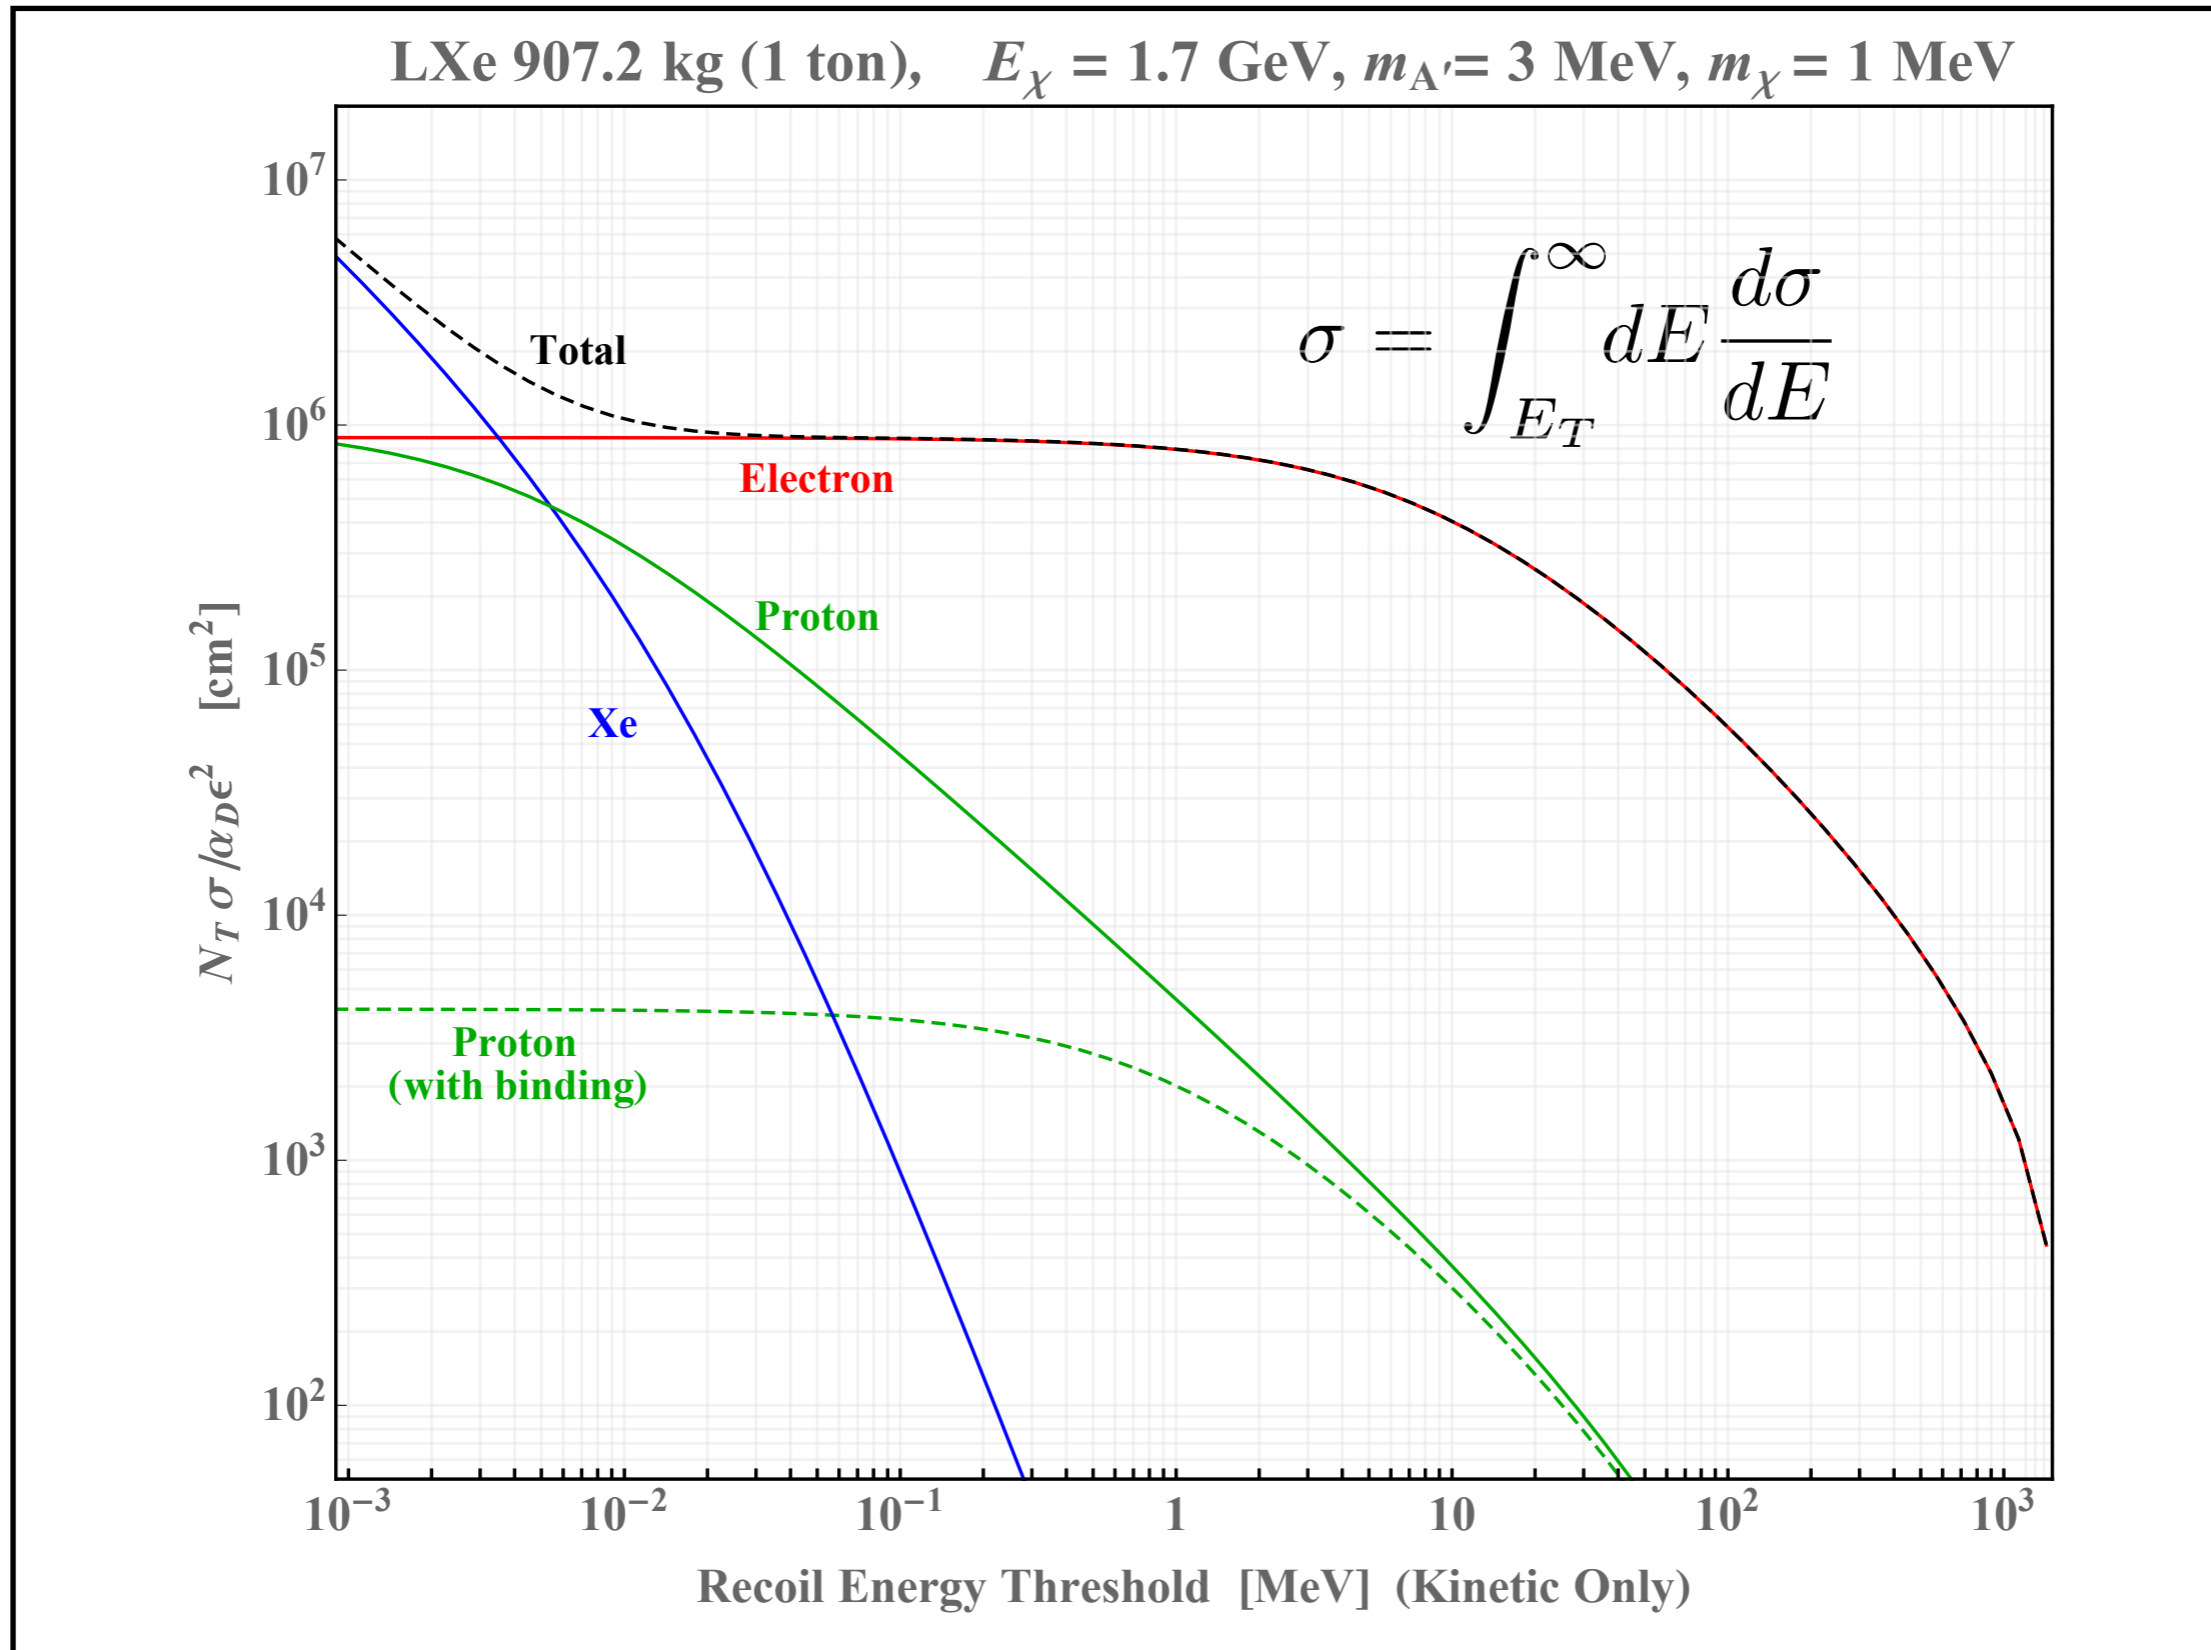

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above


Cross Section vs. Threshold, LXe

LXe 907.2 kg (1 ton), $E_\chi = 1.7$ GeV, $m_{A'} = 30$ MeV, $m_\chi = 1$ MeV

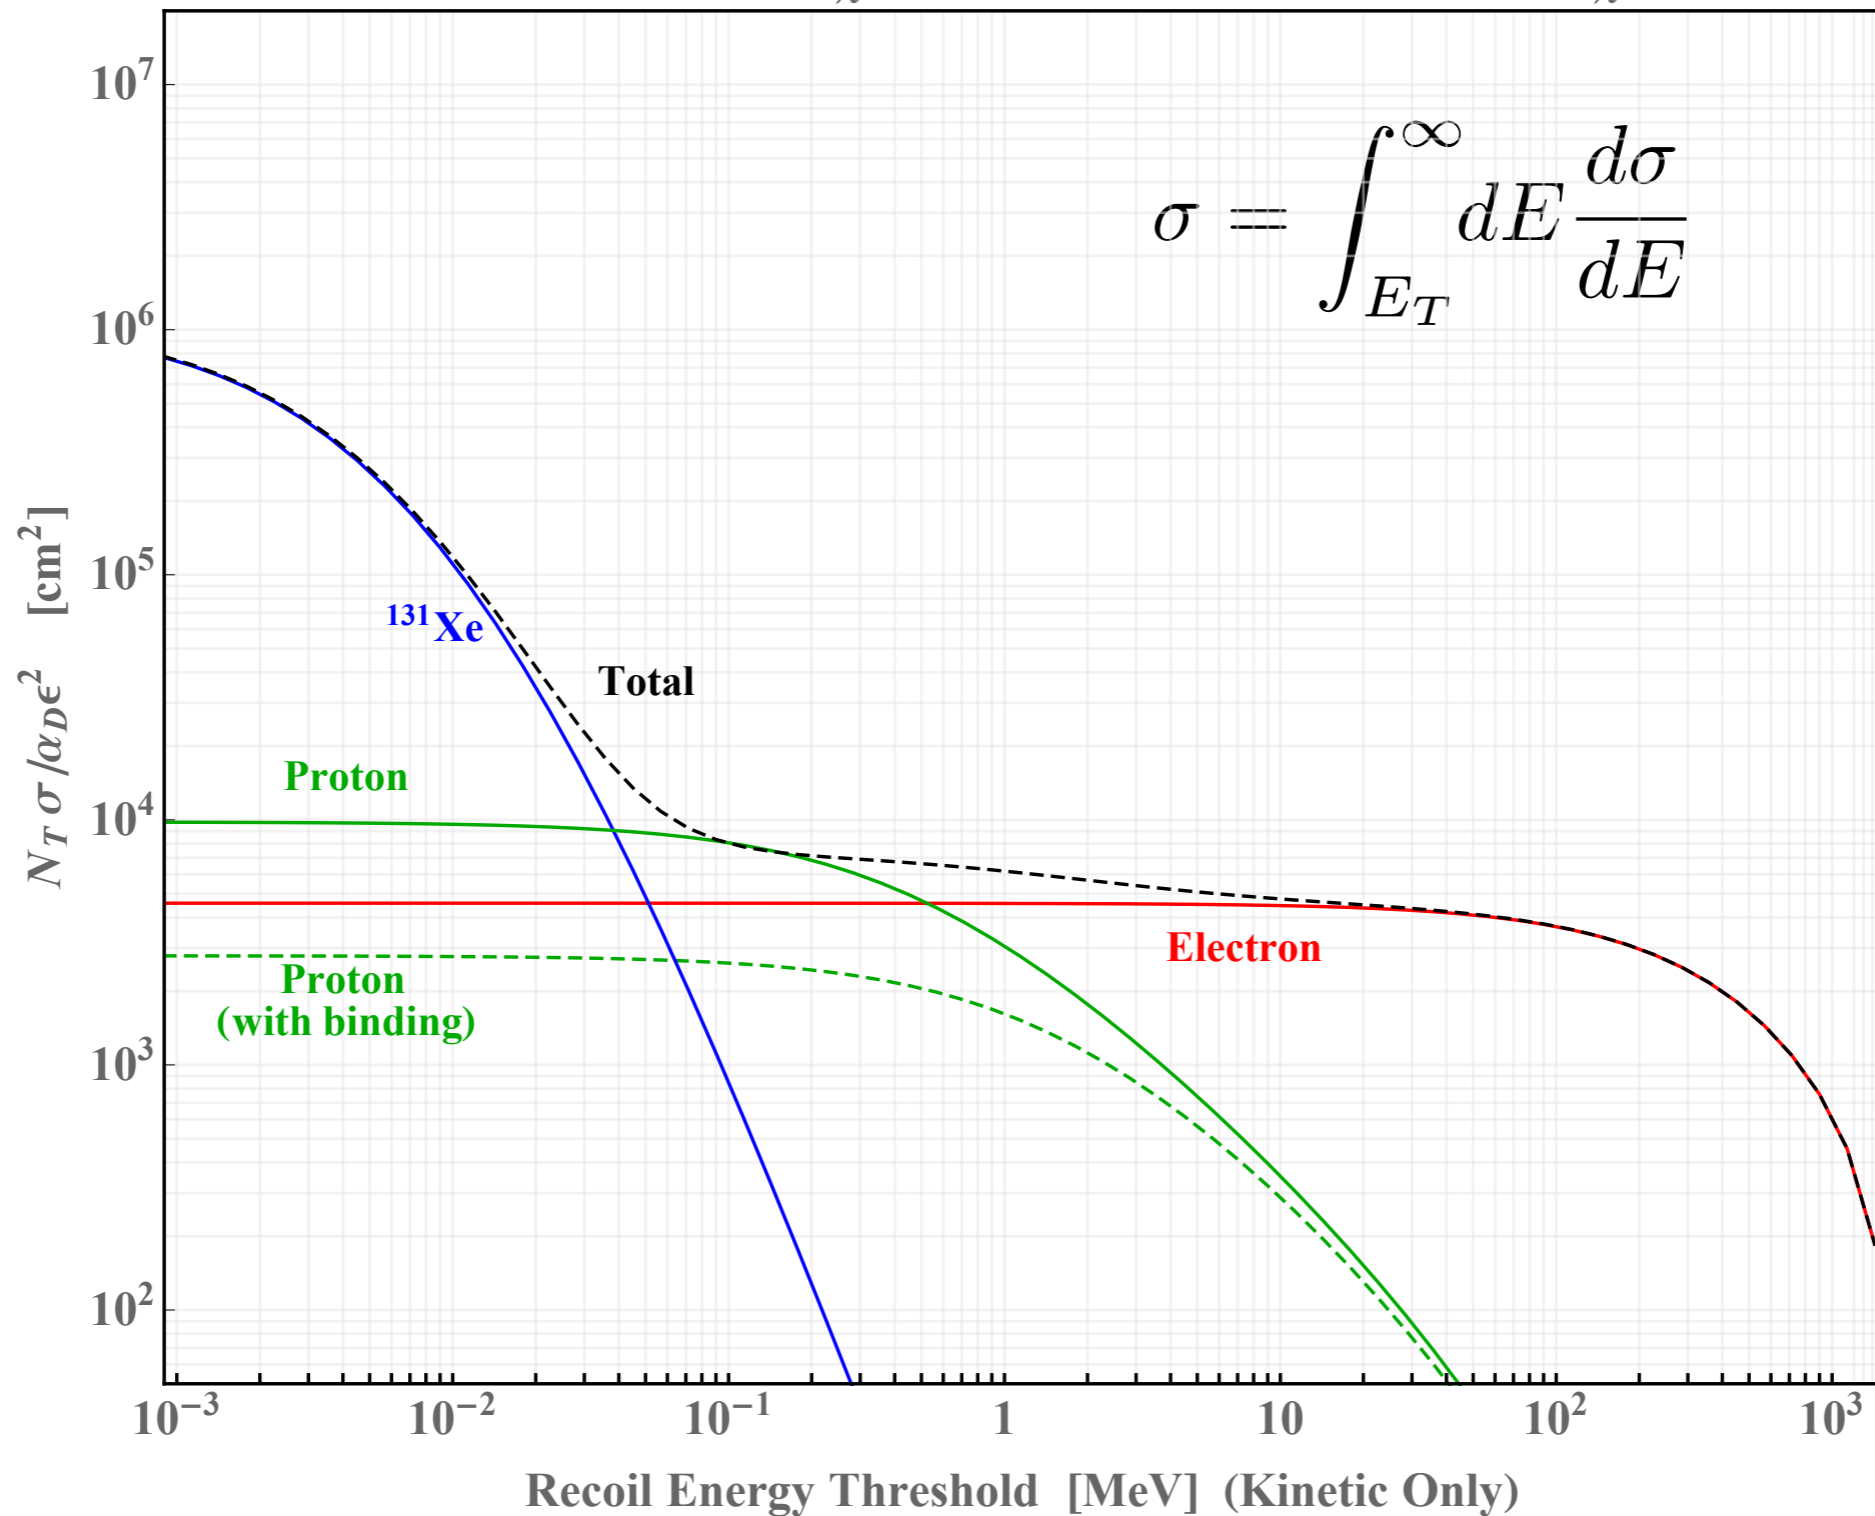


Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above

Cross Section vs. Threshold, LXe

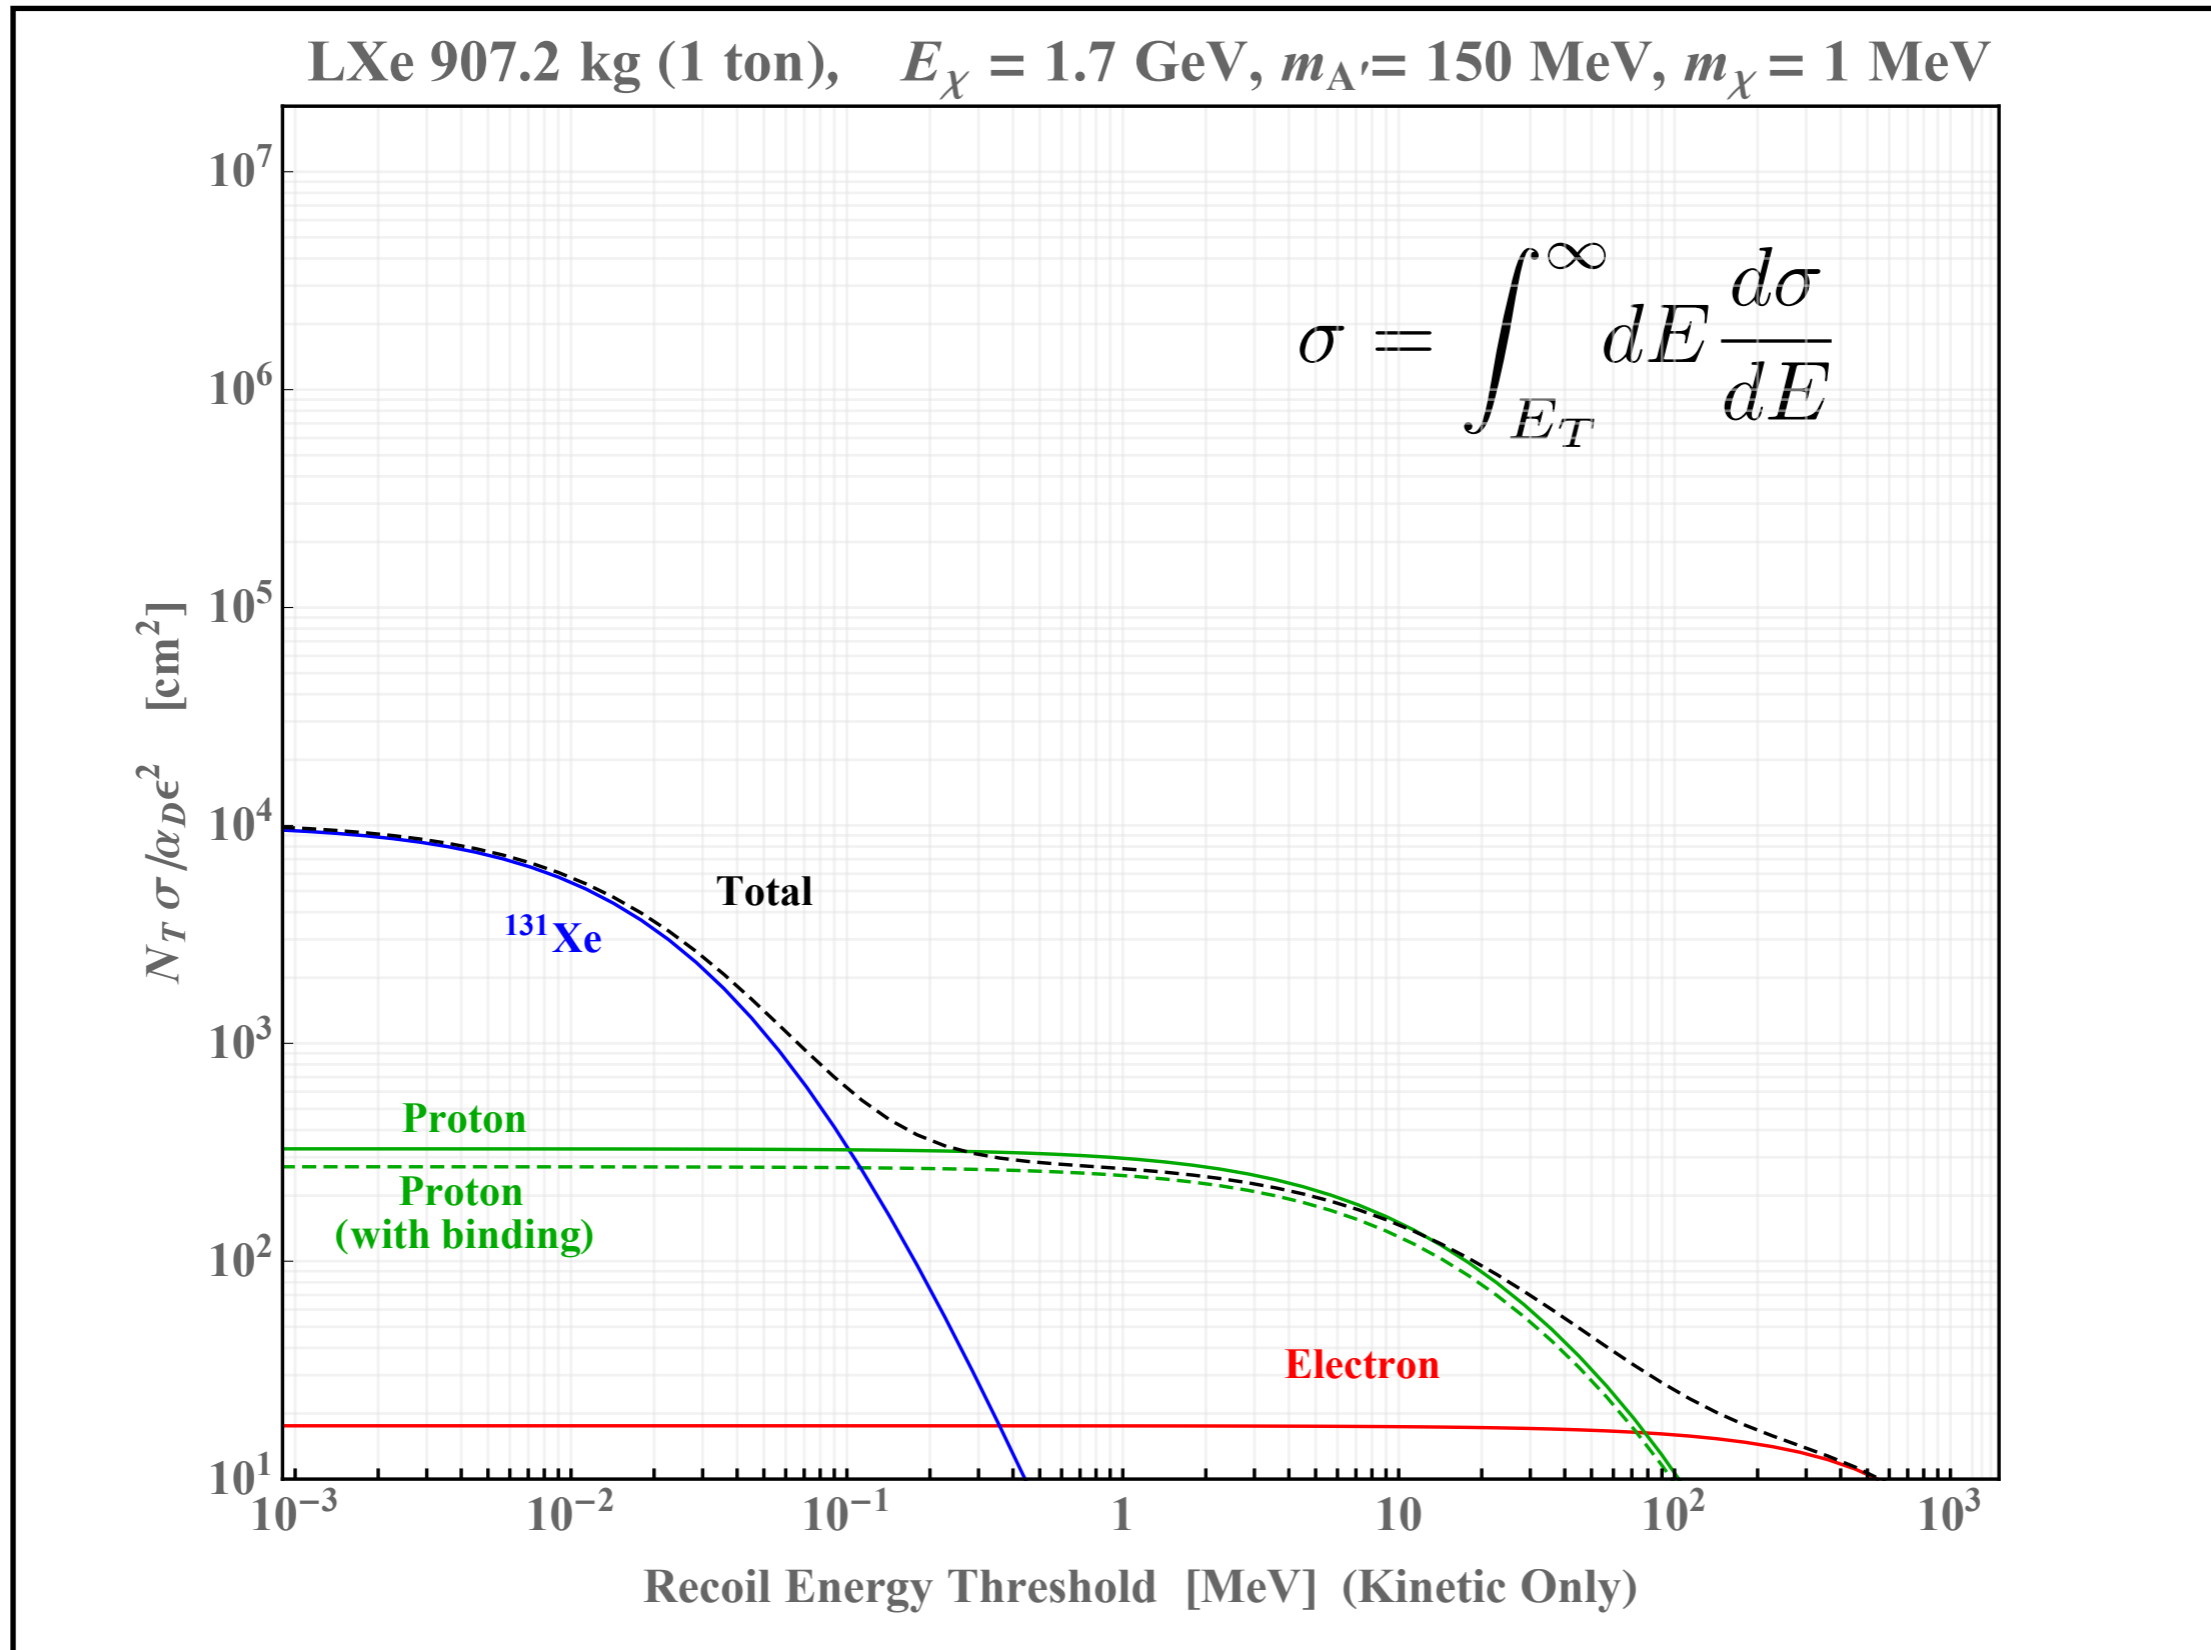

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above


Cross Section vs. Threshold, Plastic

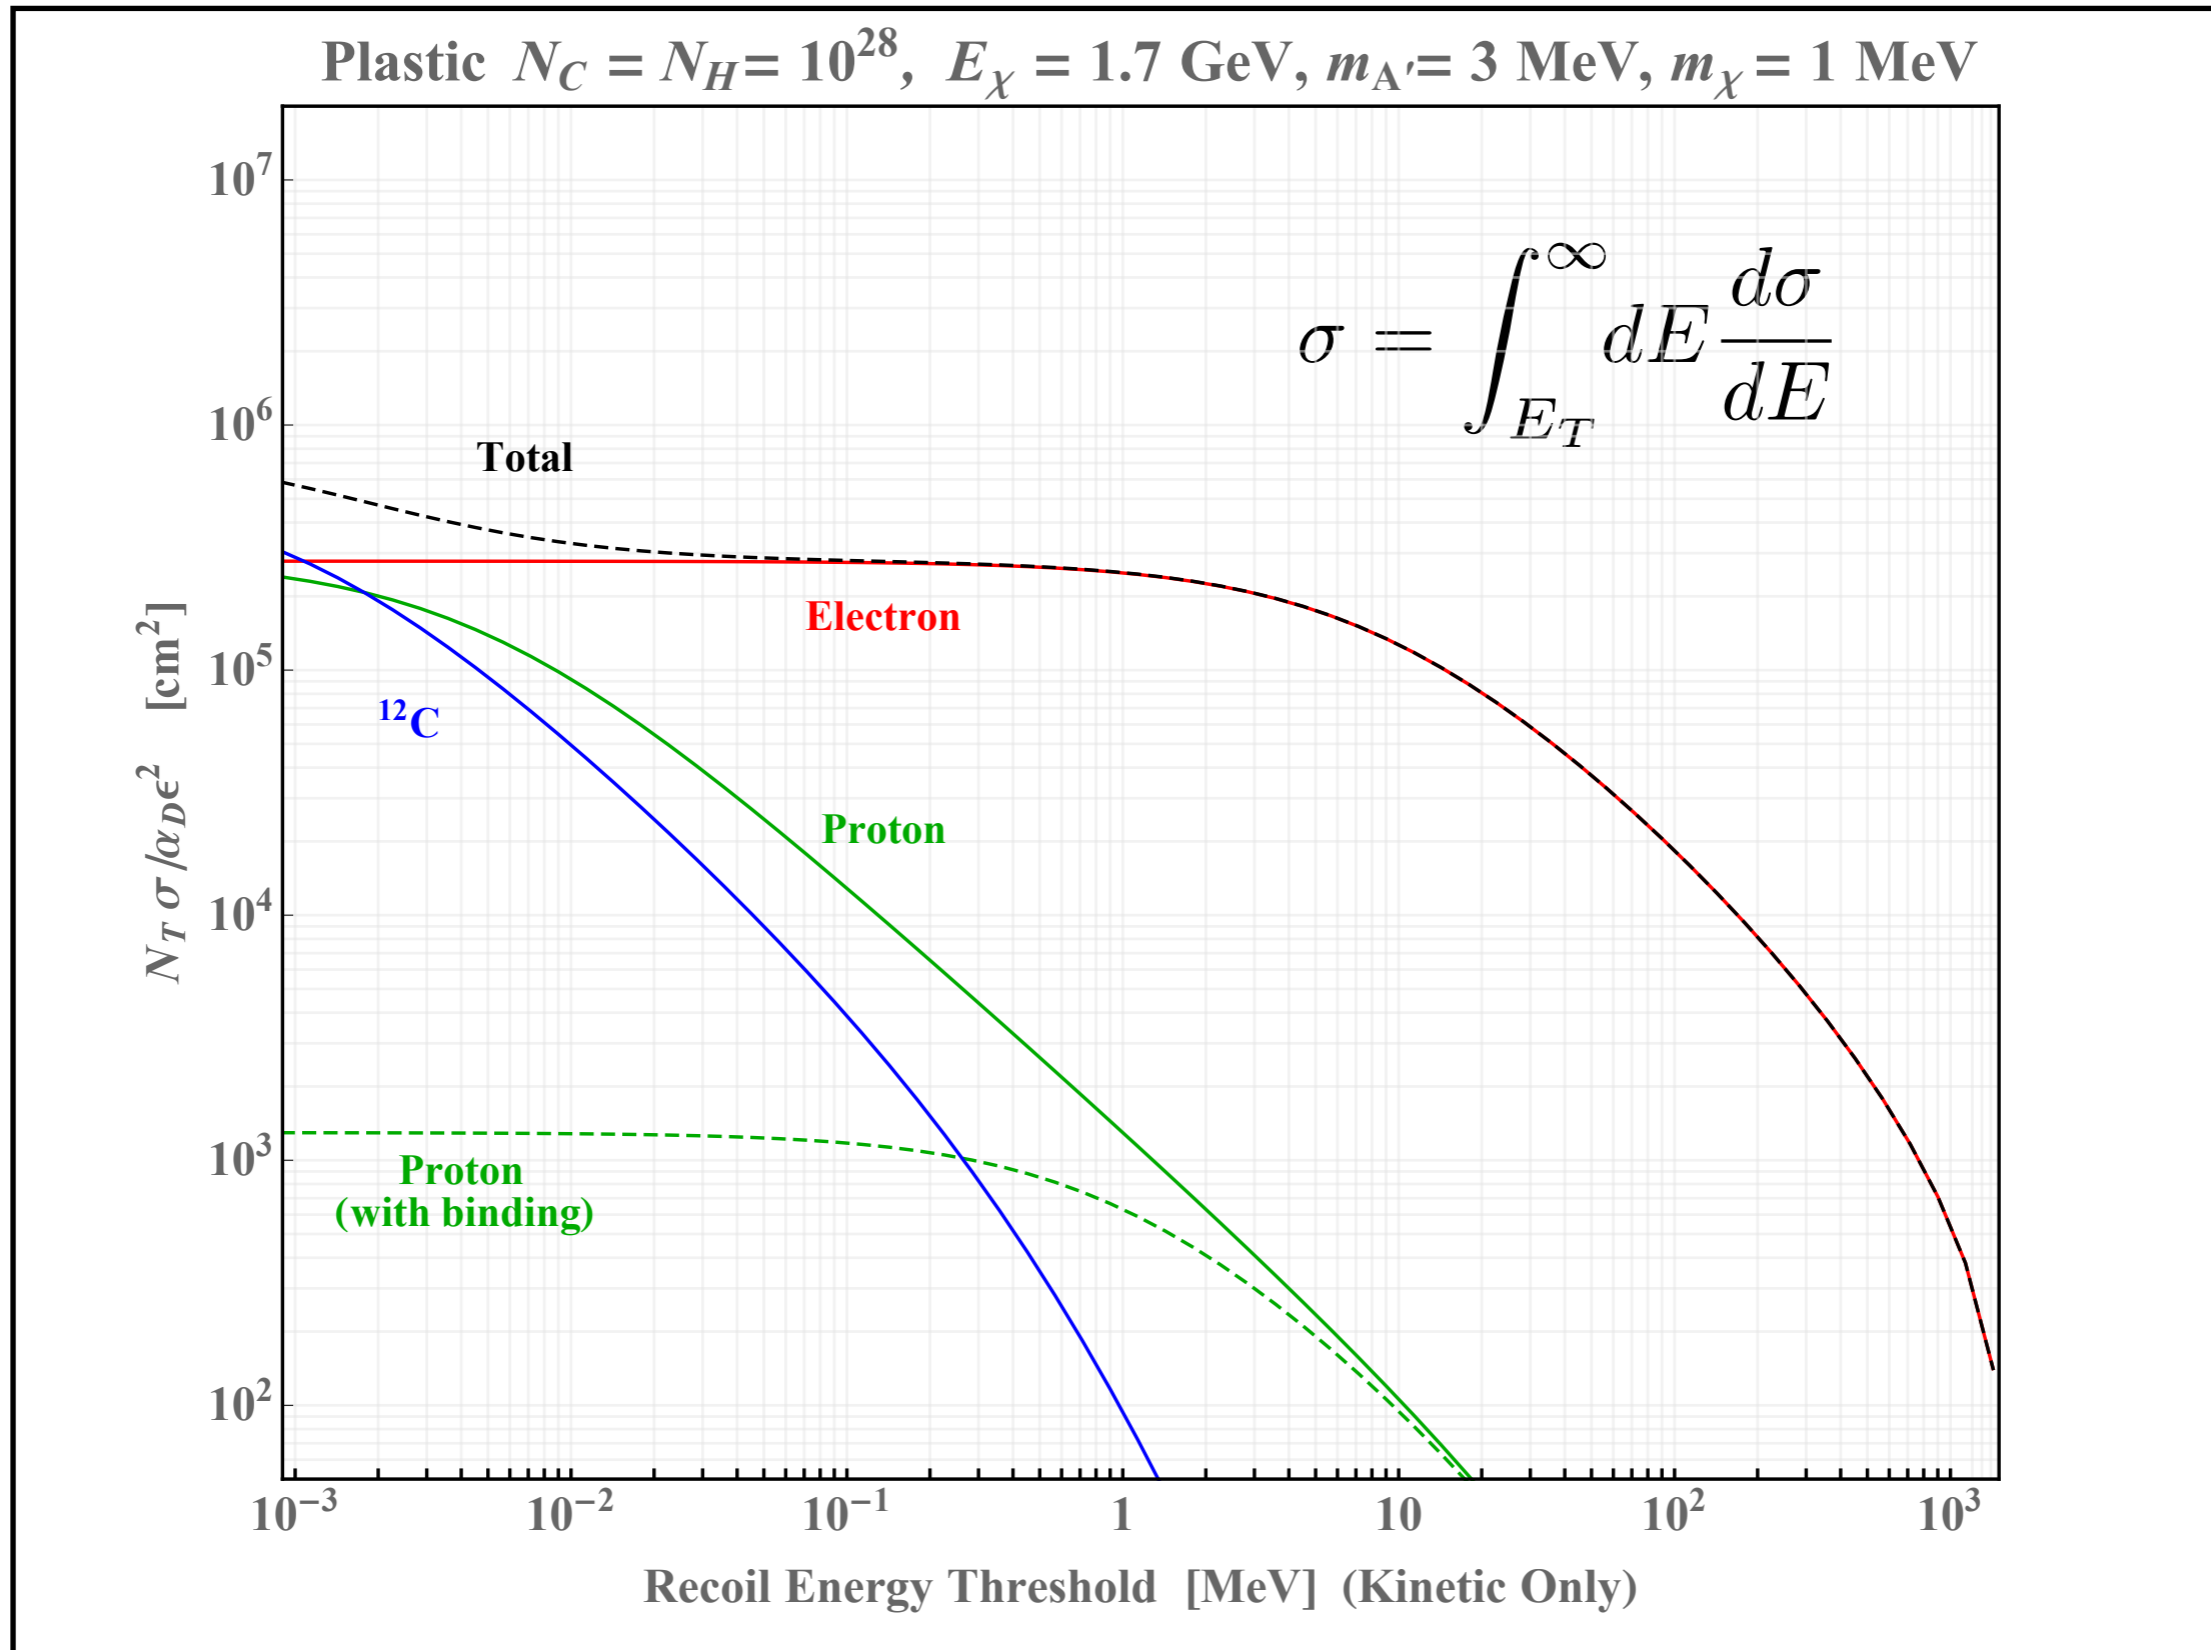

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above

Cross Section vs. Threshold, Plastic


Plastic $N_C = N_H = 10^{28}$, $E_\chi = 1.7$ GeV, $m_{A'} = 30$ MeV, $m_\chi = 1$ MeV

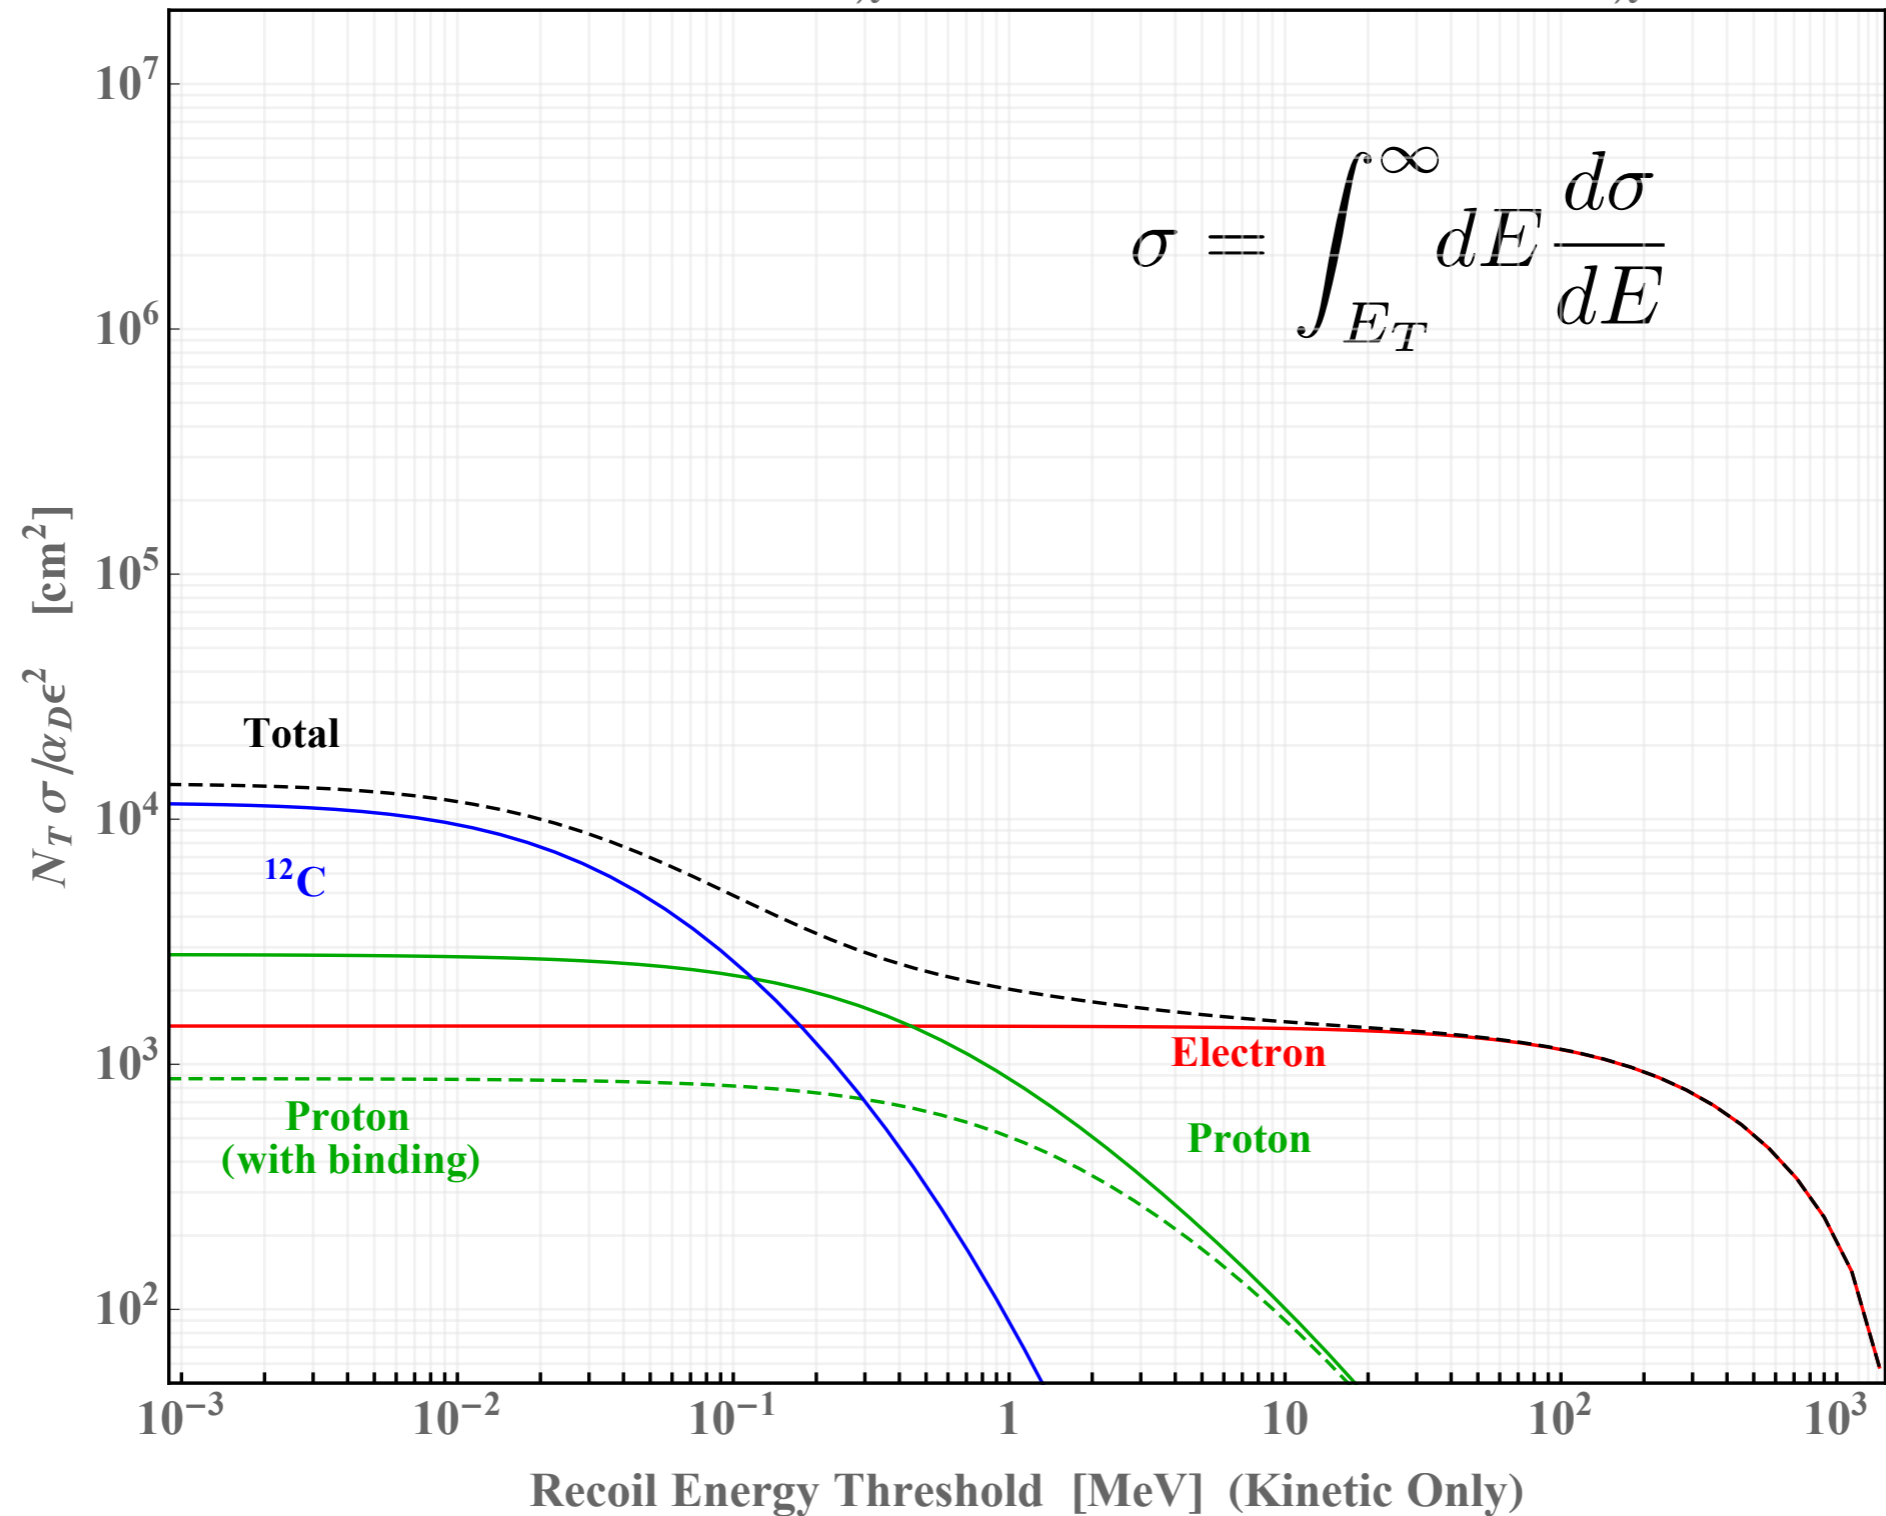

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above


Cross Section vs. Threshold, Plastic

Plastic $N_C = N_H = 10^{28}$, $E_\chi = 1.7$ GeV, $m_{A'} = 150$ MeV, $m_\chi = 1$ MeV

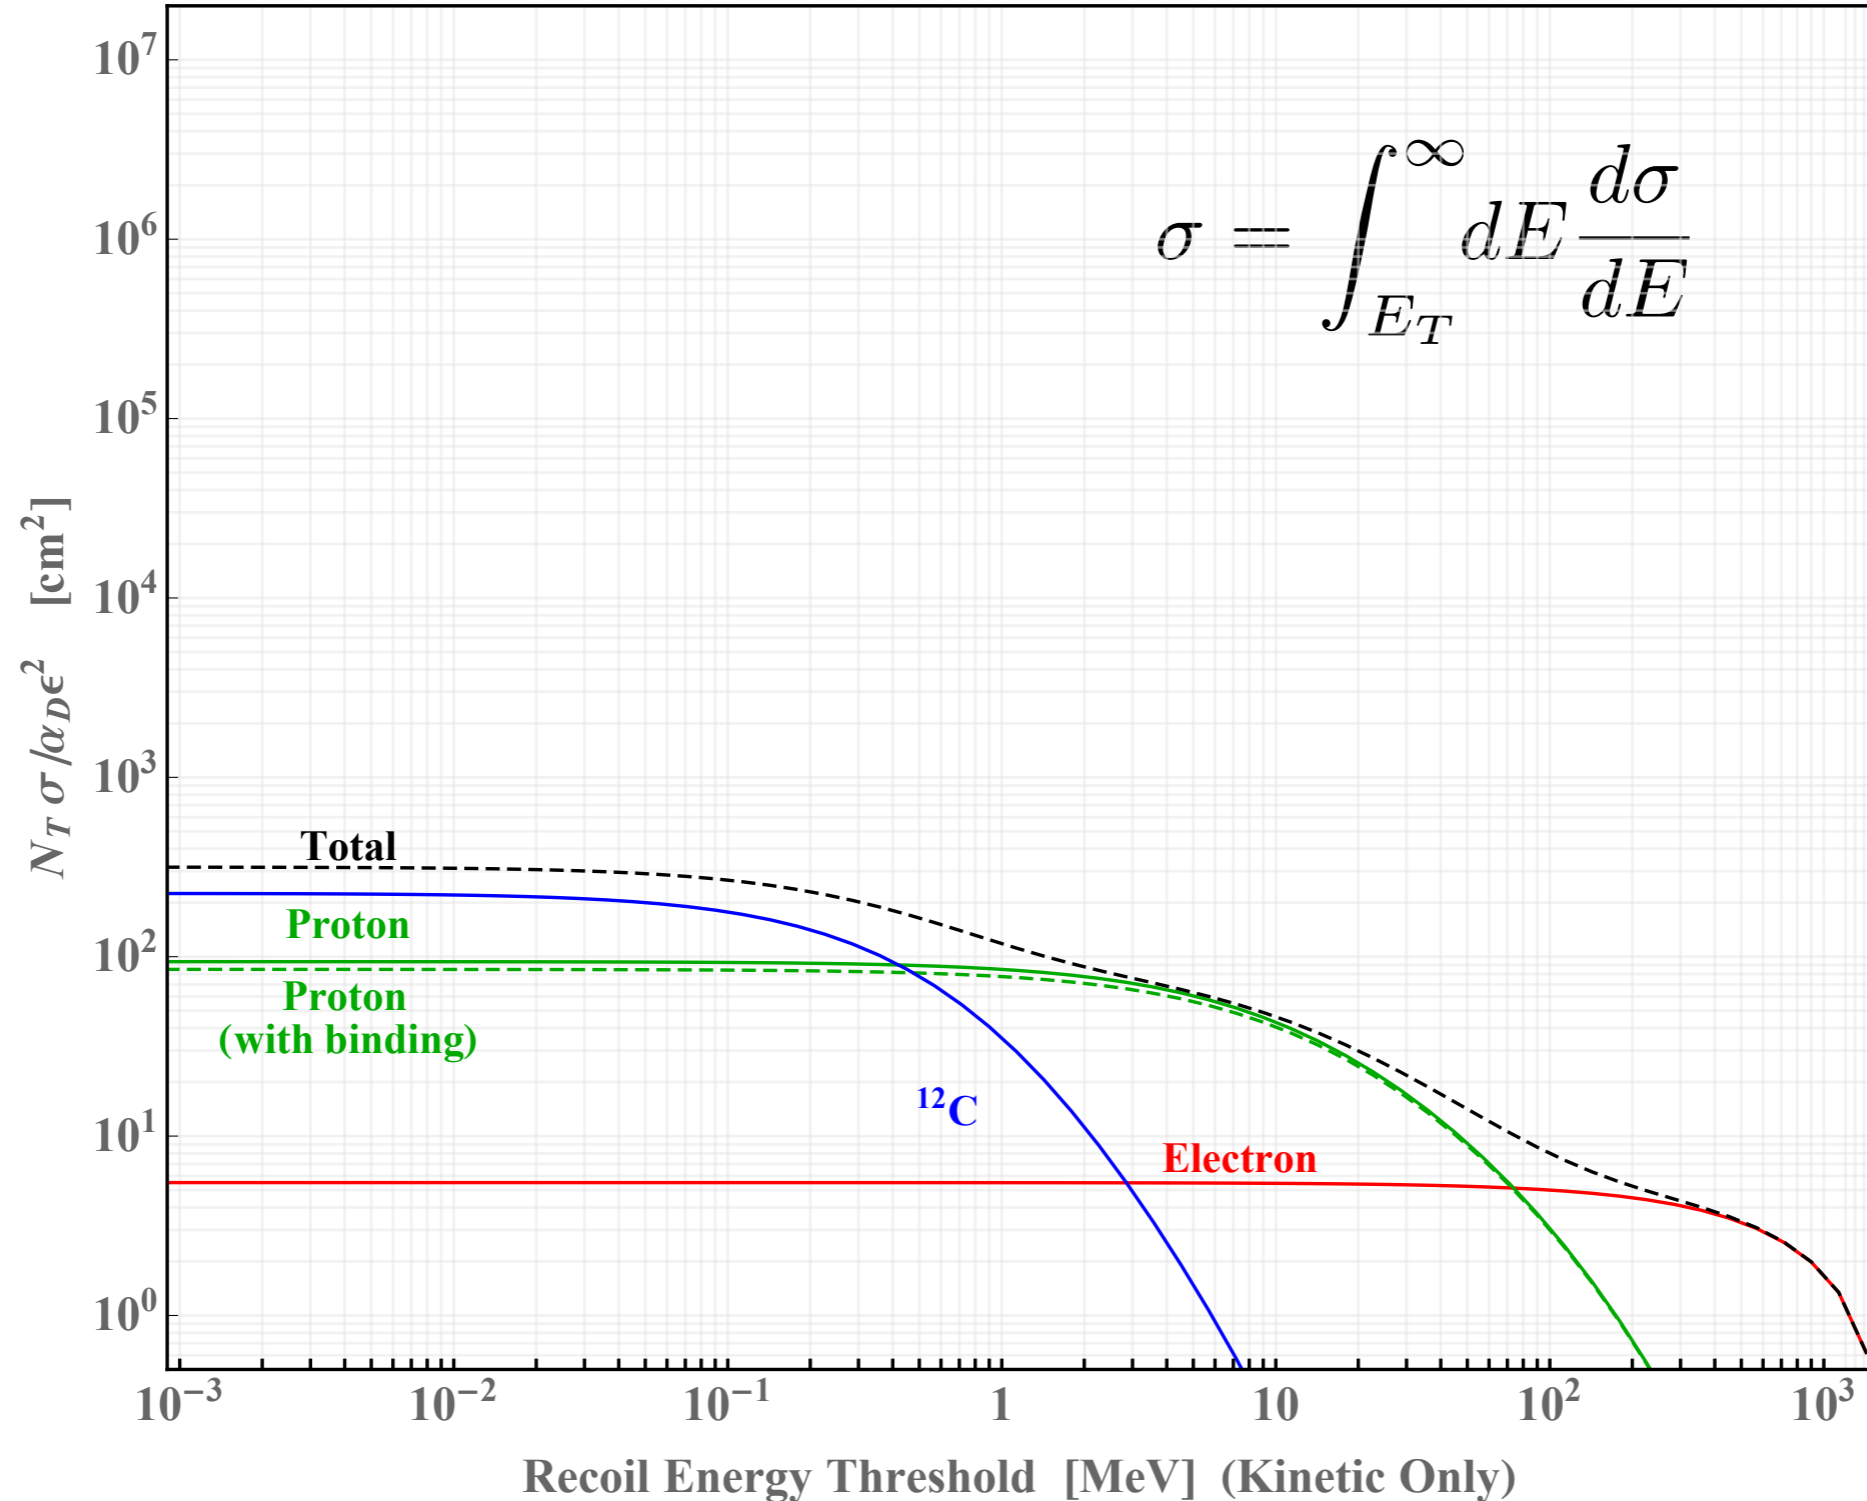

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above


Cross Section vs. Threshold, Si

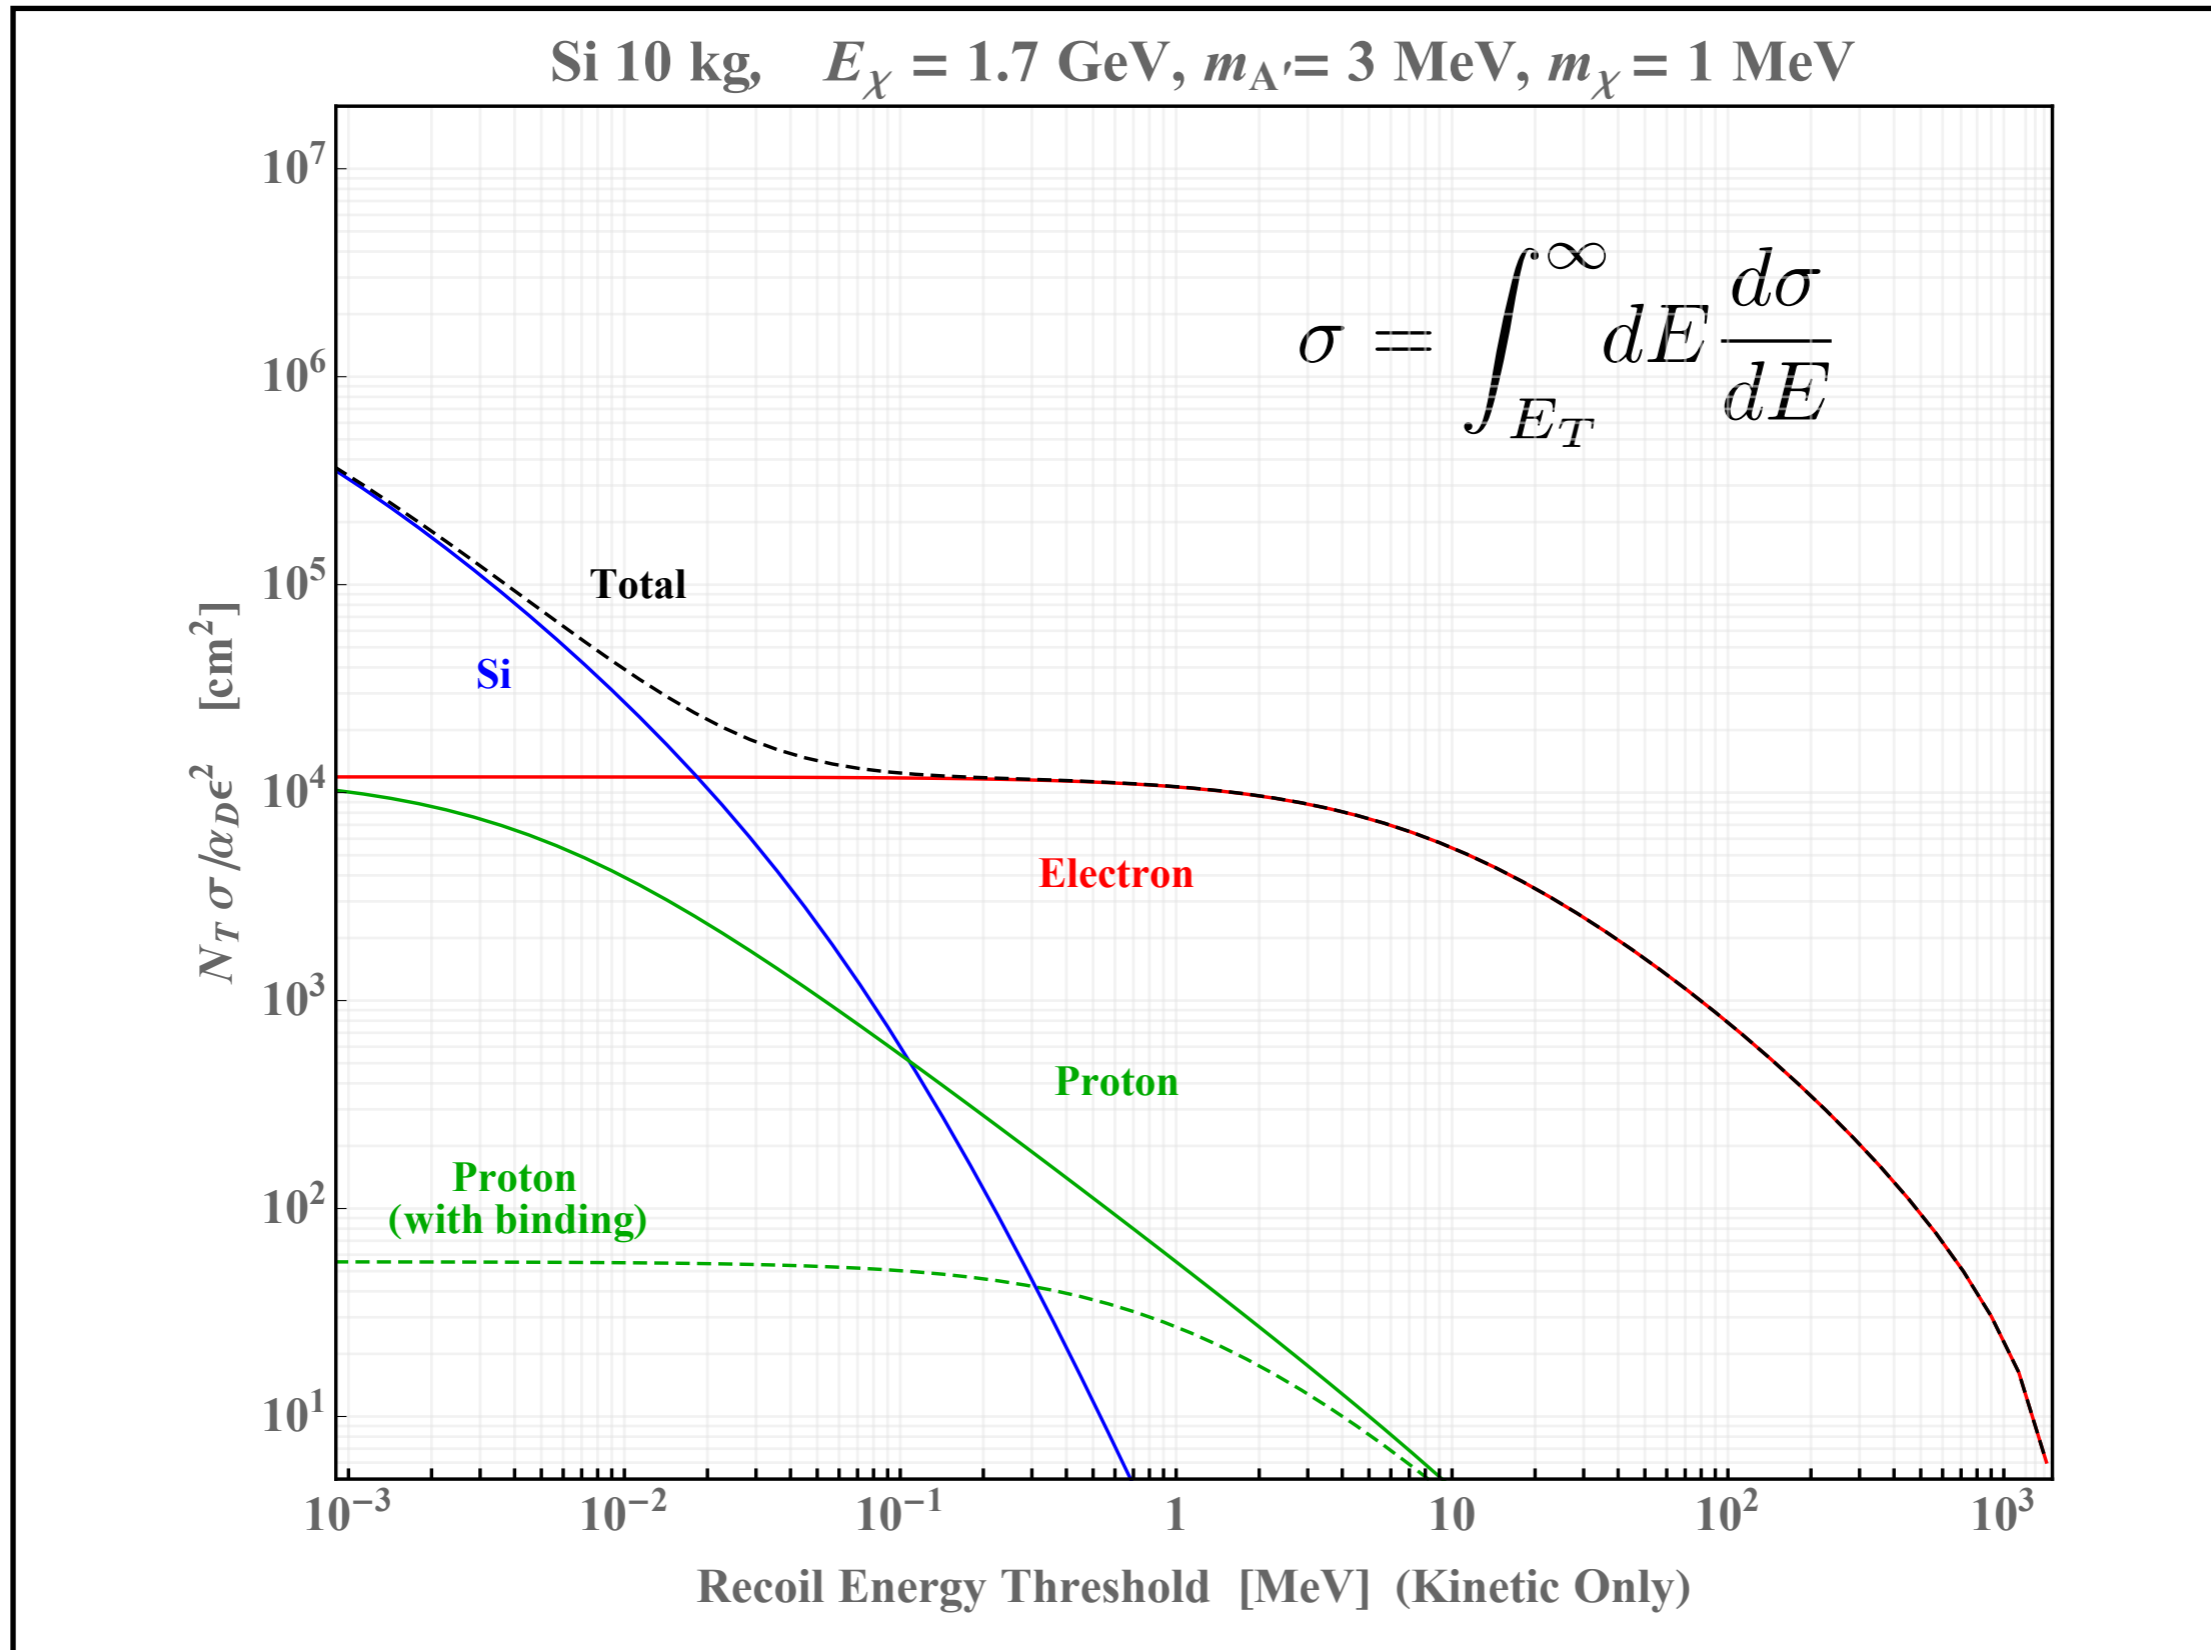

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above

Cross Section vs. Threshold, Si


Si 10 kg, $E_\chi = 1.7$ GeV, $m_{A'} = 30$ MeV, $m_\chi = 1$ MeV

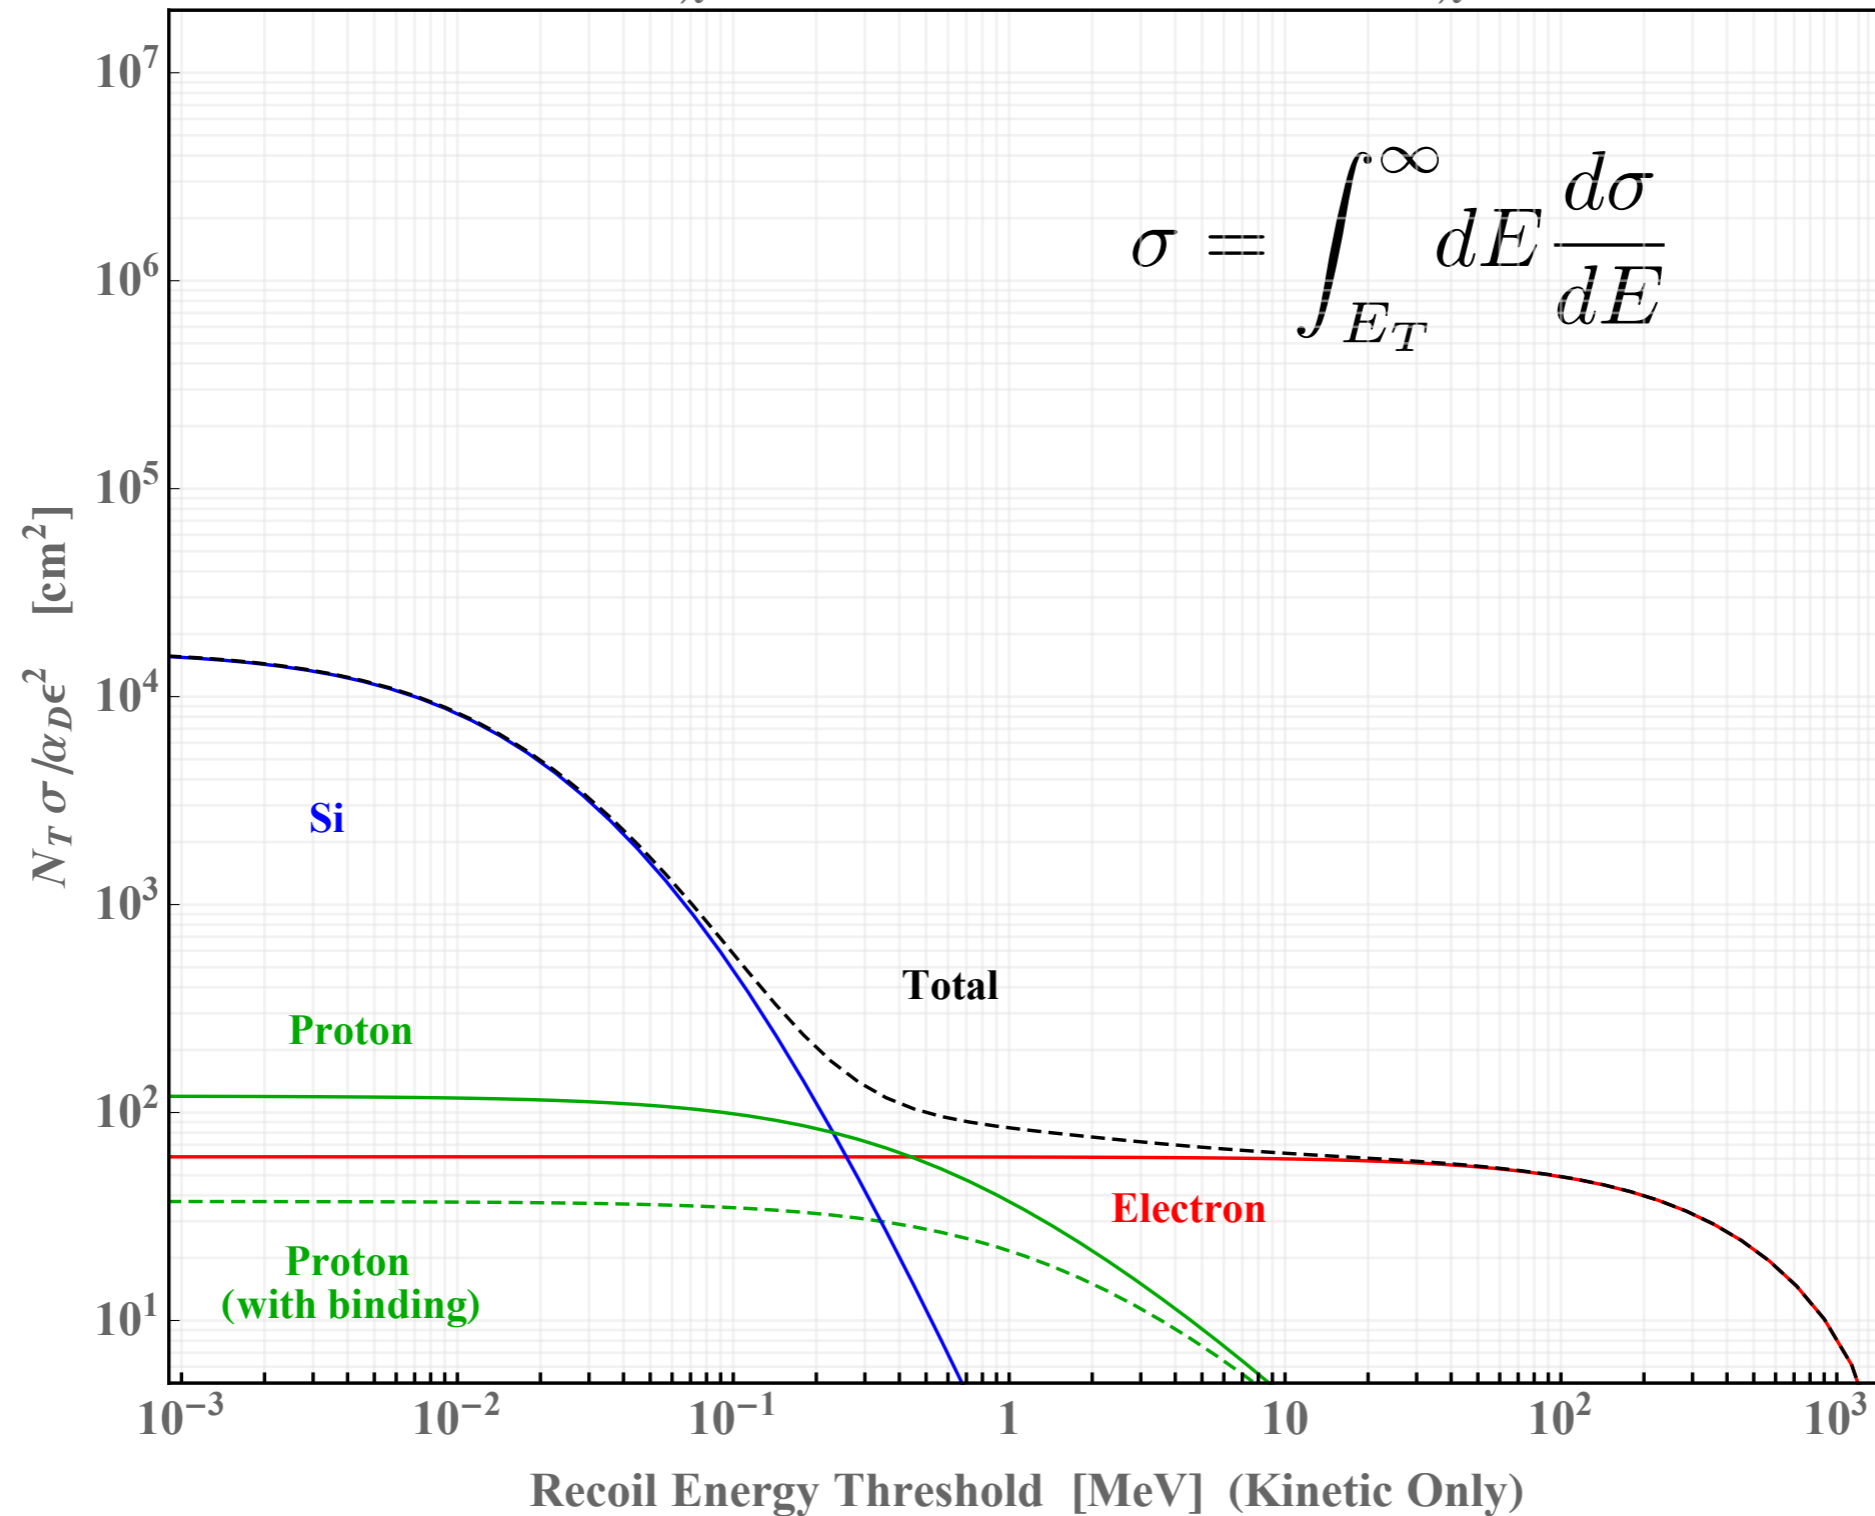

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above


Cross Section vs. Threshold, Si

Si 10 kg, $E_\chi = 1.7$ GeV, $m_{A'} = 150$ MeV, $m_\chi = 1$ MeV

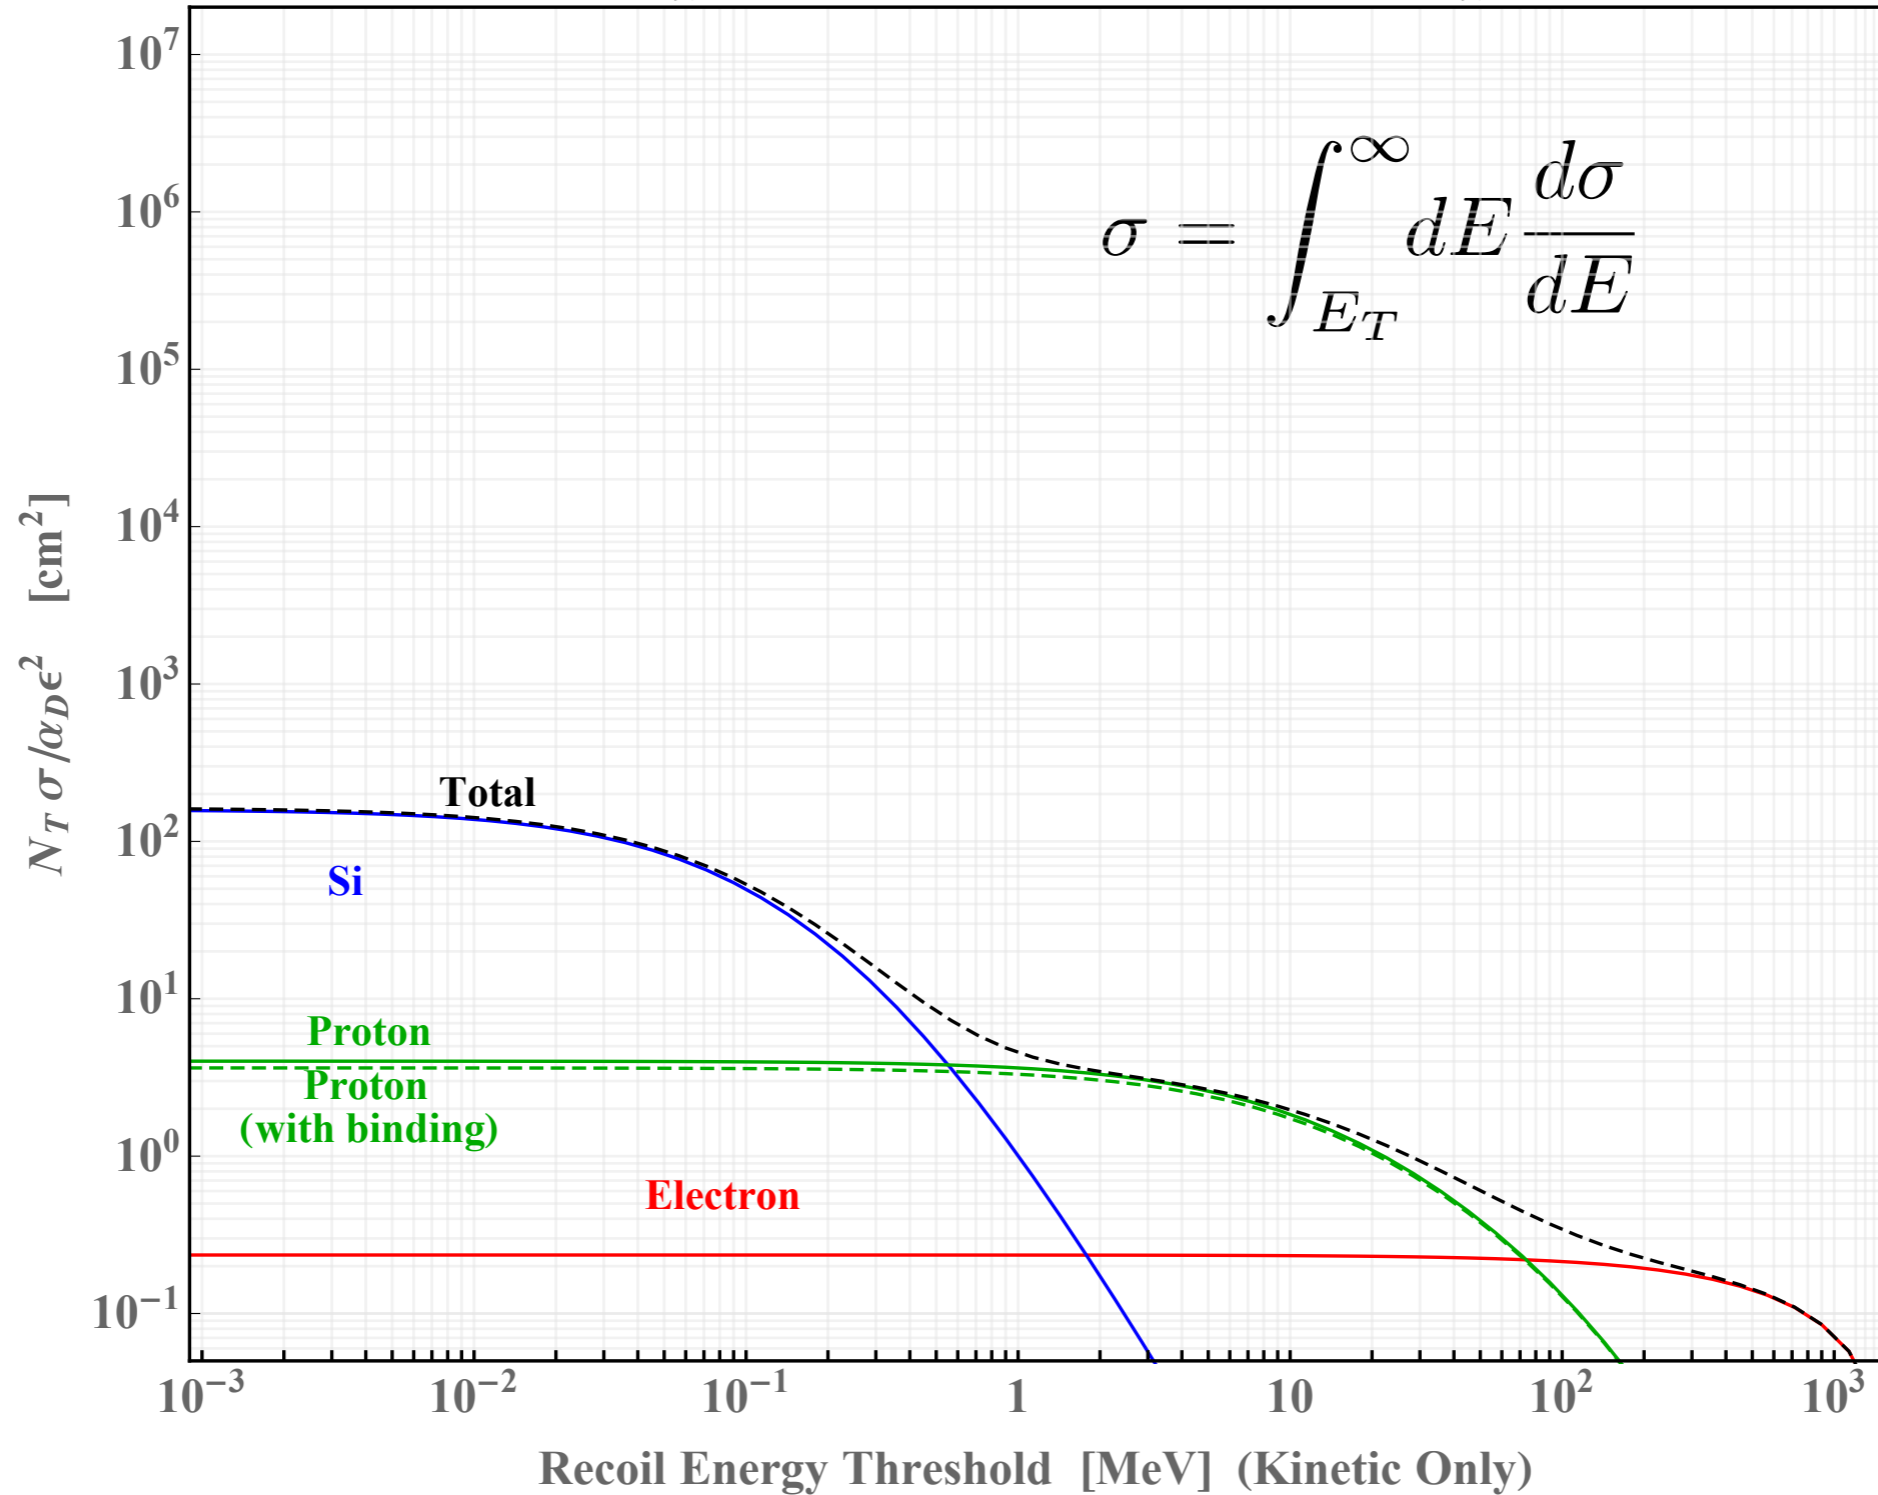


Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above

Cross Section vs. Threshold, All

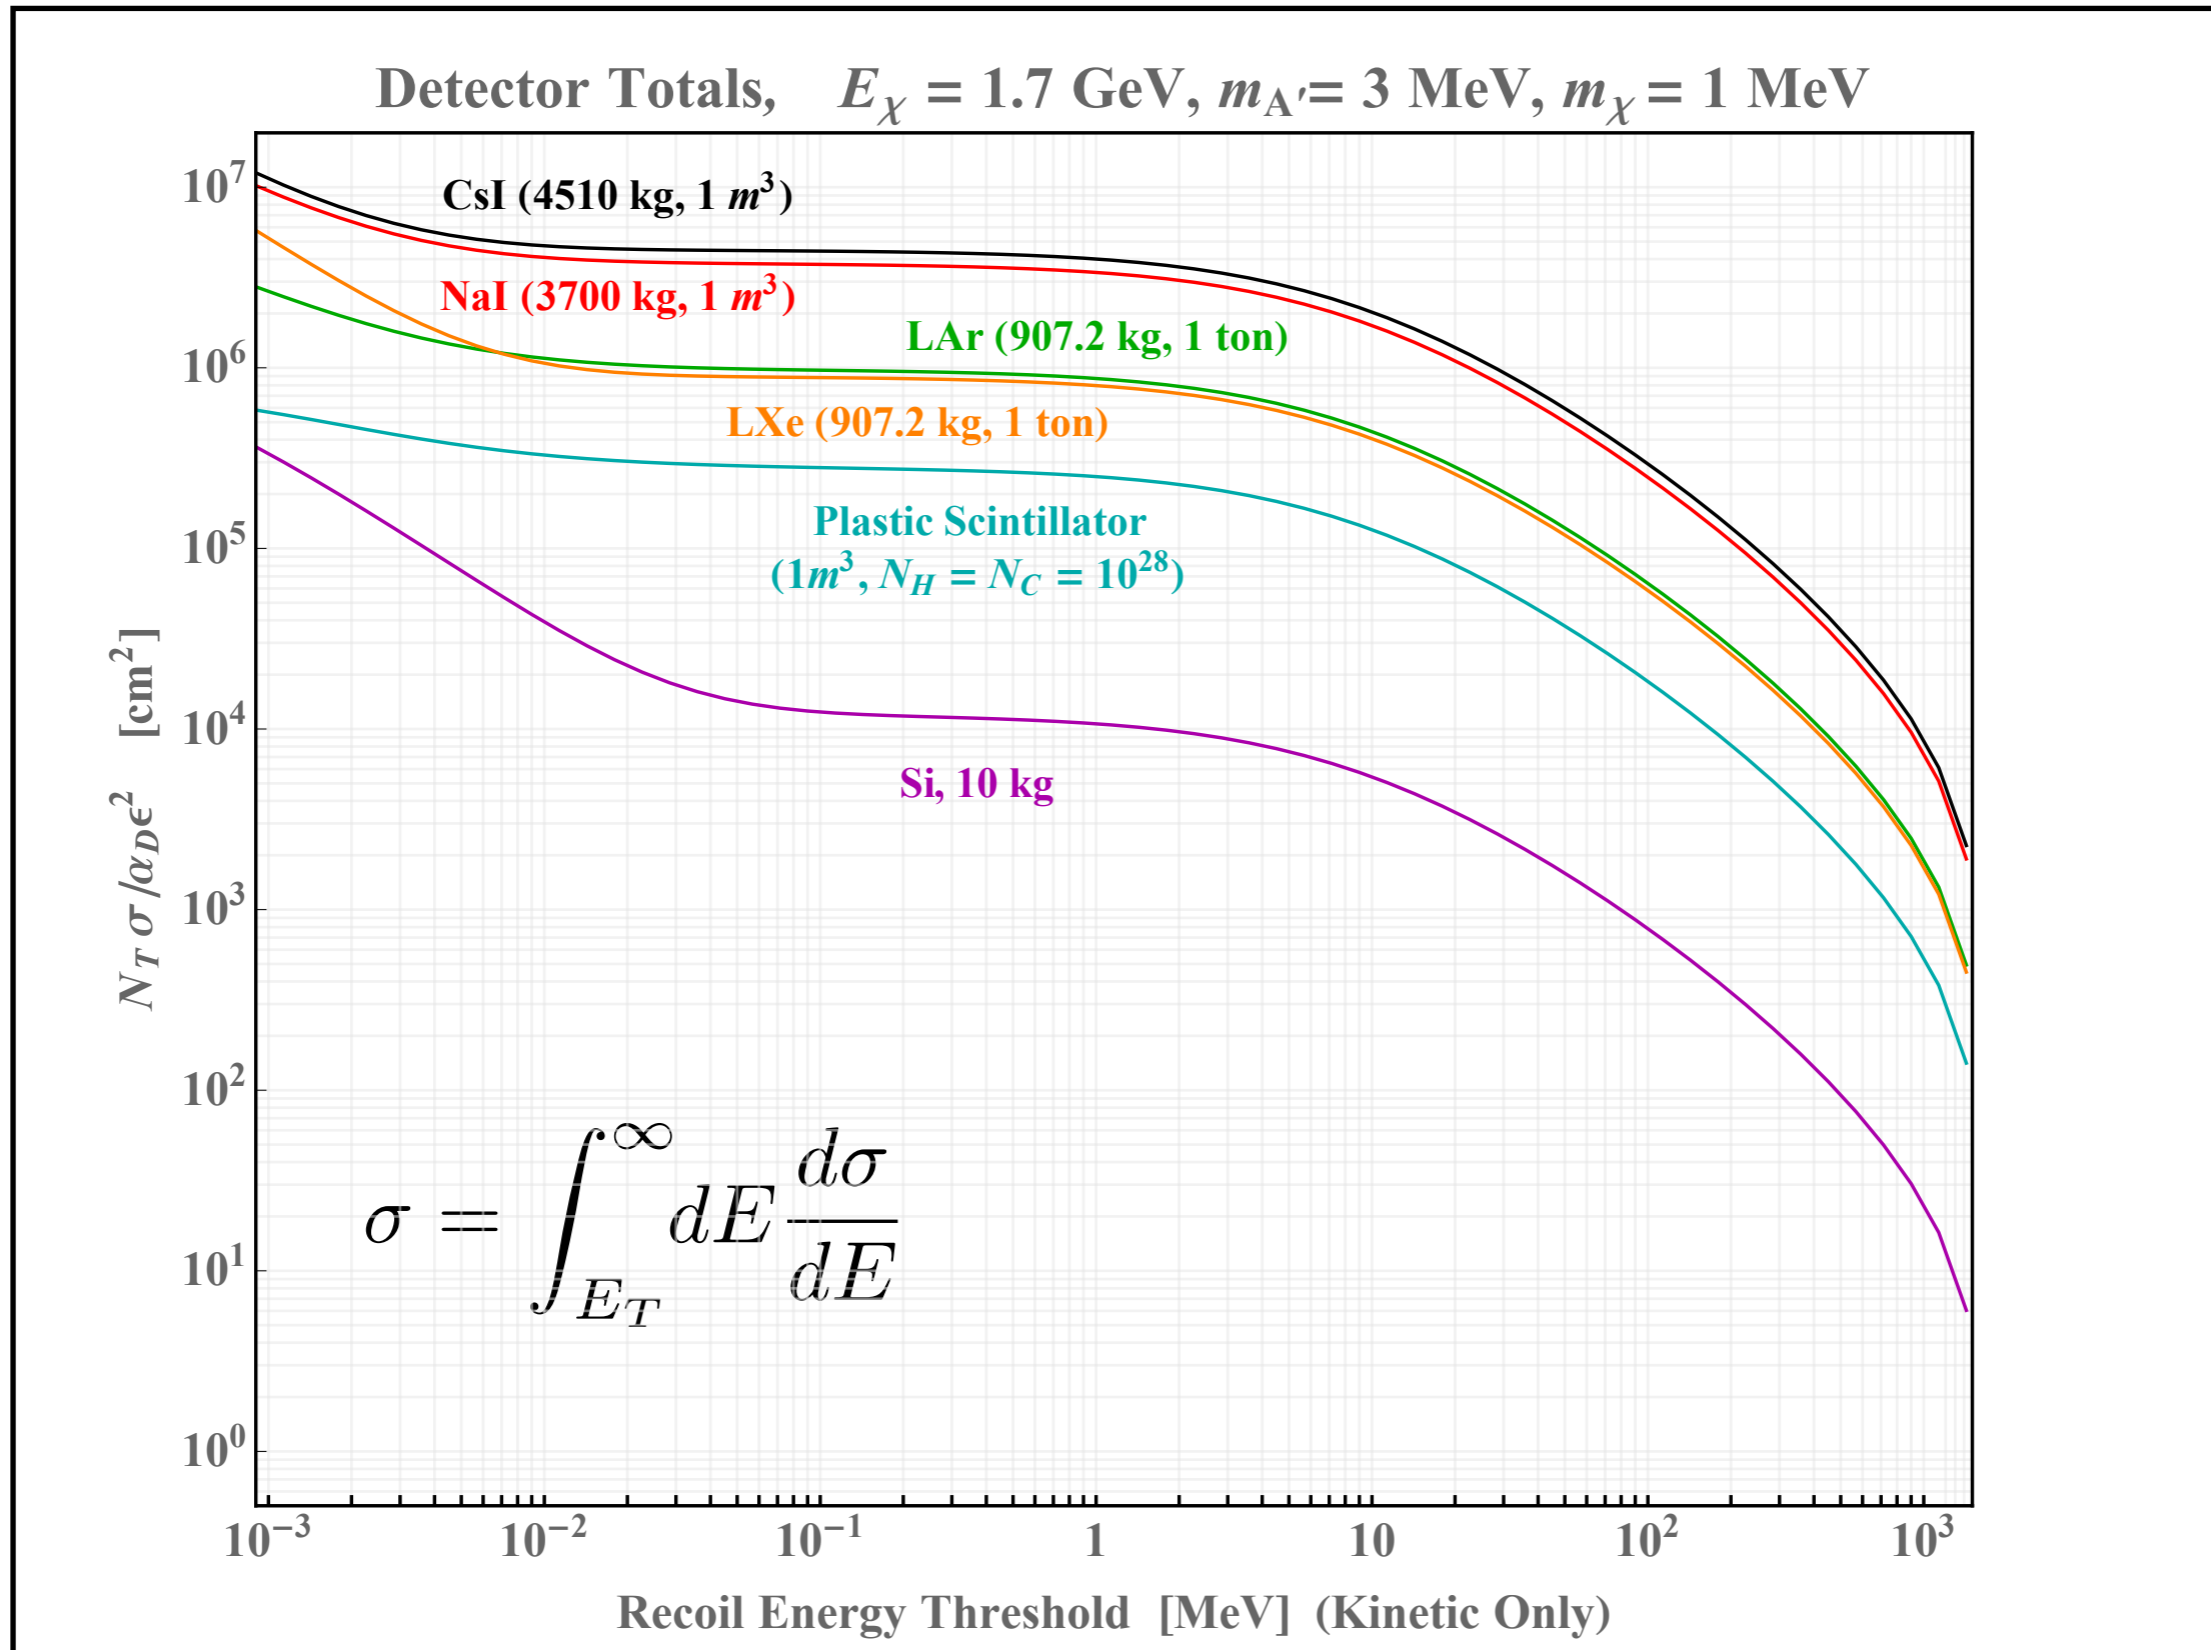


Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above

Cross Section vs. Threshold, All

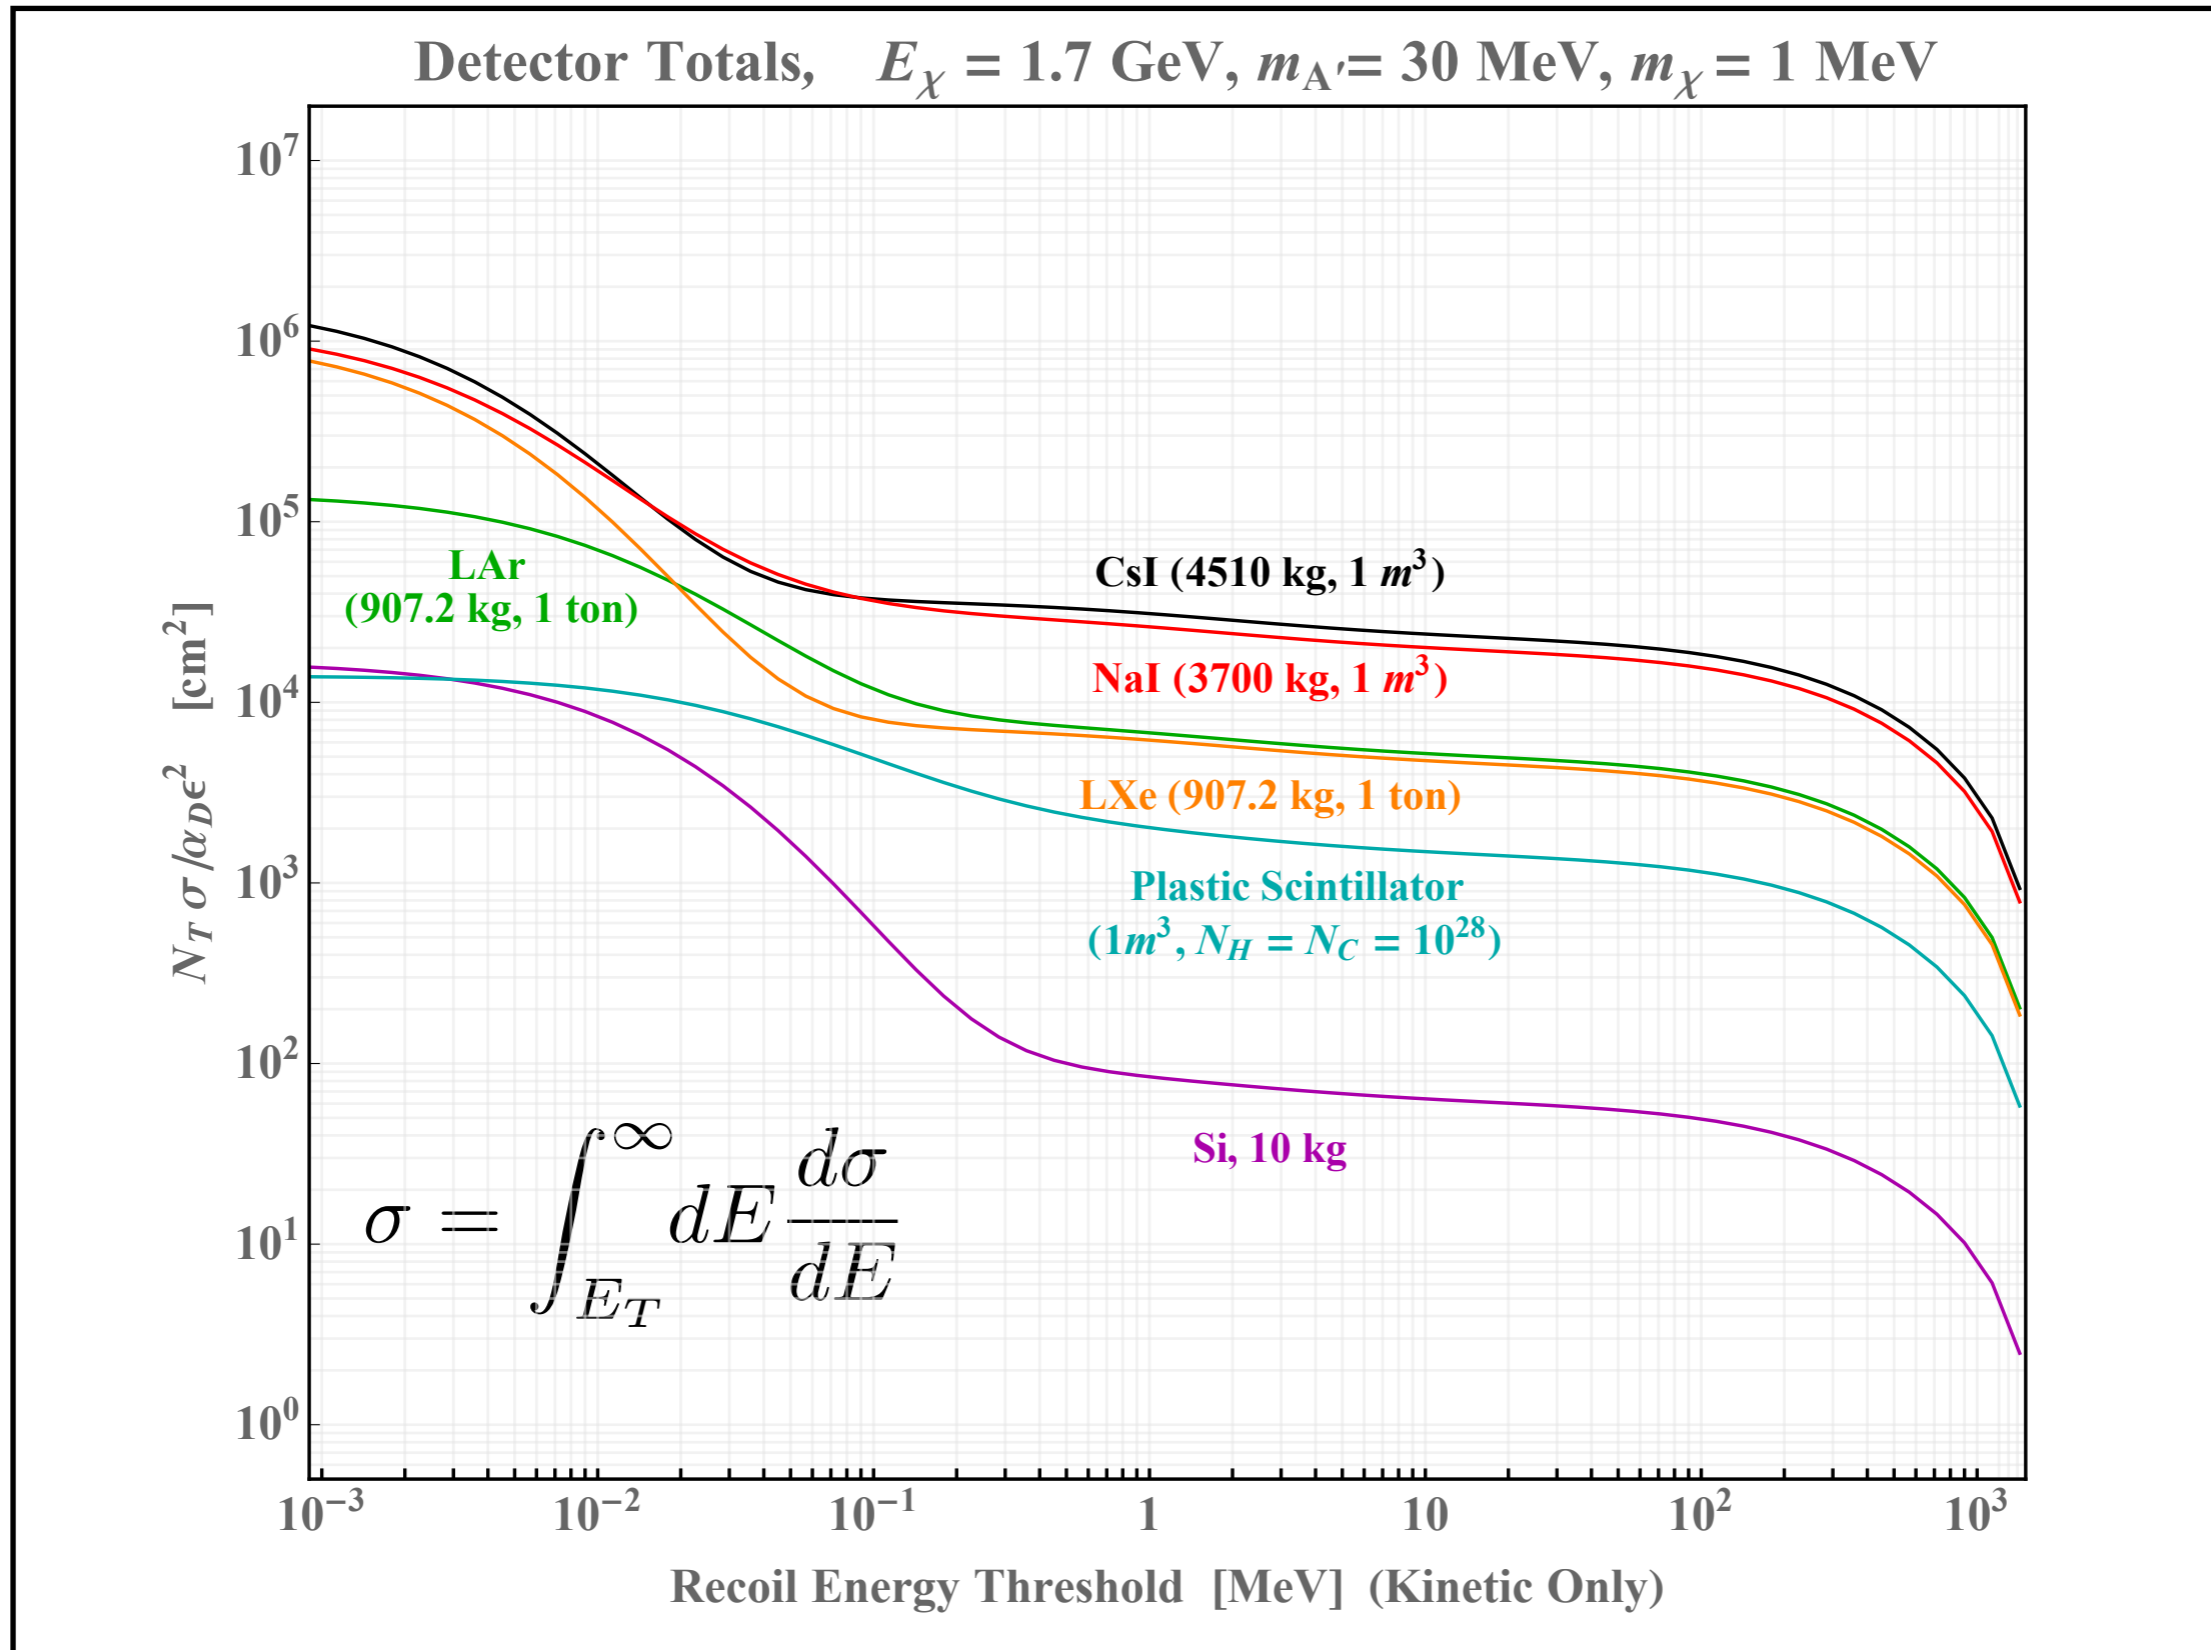

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above

Cross Section vs. Threshold, All

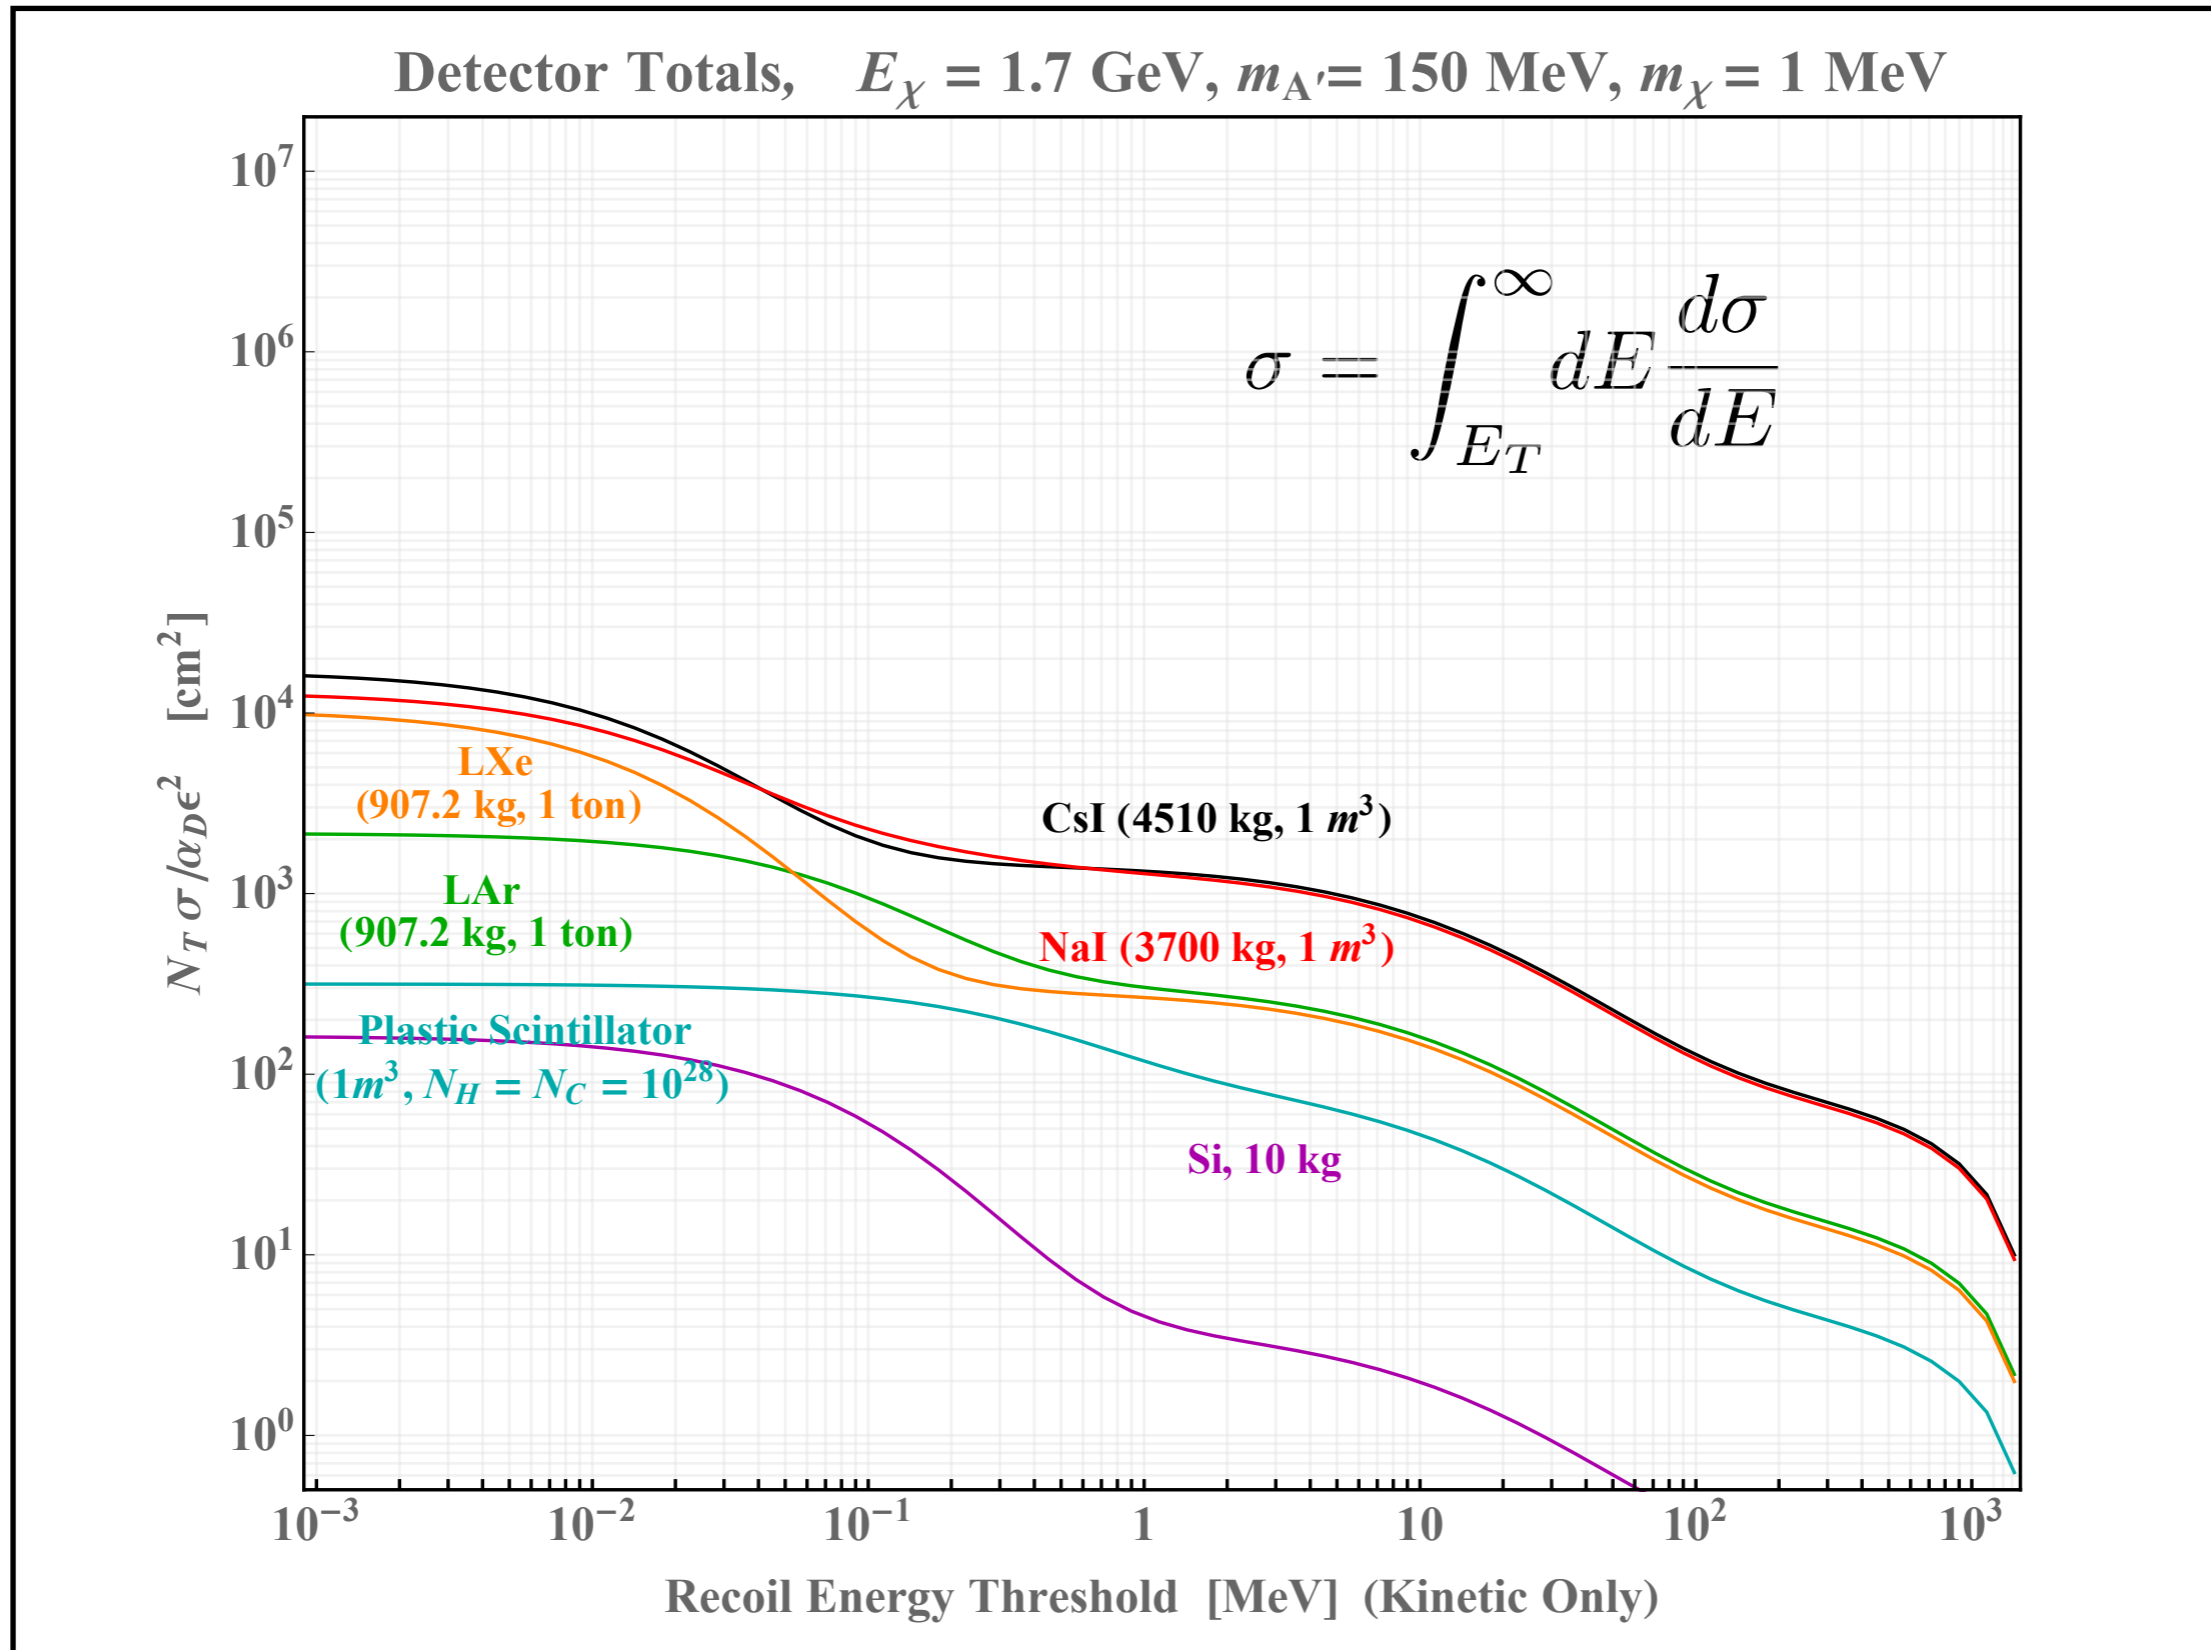

Geometric Acceptance $\sim 0.5\%$ for Al dump, not included above

Caveats/Comments

- “Morally correct” to convolve with acceptance beam profile
Here we use single energy ~ 2 GeV, since this makes tiny difference

Mainly matters for heavy mediator & DM regime
(where we have less sensitivity)
- Computing rates requires relative Z/A factors for number densities of each species. May change ranking depending on detector molecules (easy to rescale)
- Here focus is 2-2 scattering cross sections only. Folding in acceptance is a factor in deciding detector material etc.
- Requests are welcome (materials, energies, data points etc.)