


CALADIUM in ESA facing the beam




6 Mimso26 sensor planes plus cabling and cooling



From top to bottom: Data adaptor (reduction board), Trigger Logic Unit (TLU) and 8V DC Power supply for sensors (3.56 Amps are the working current.)

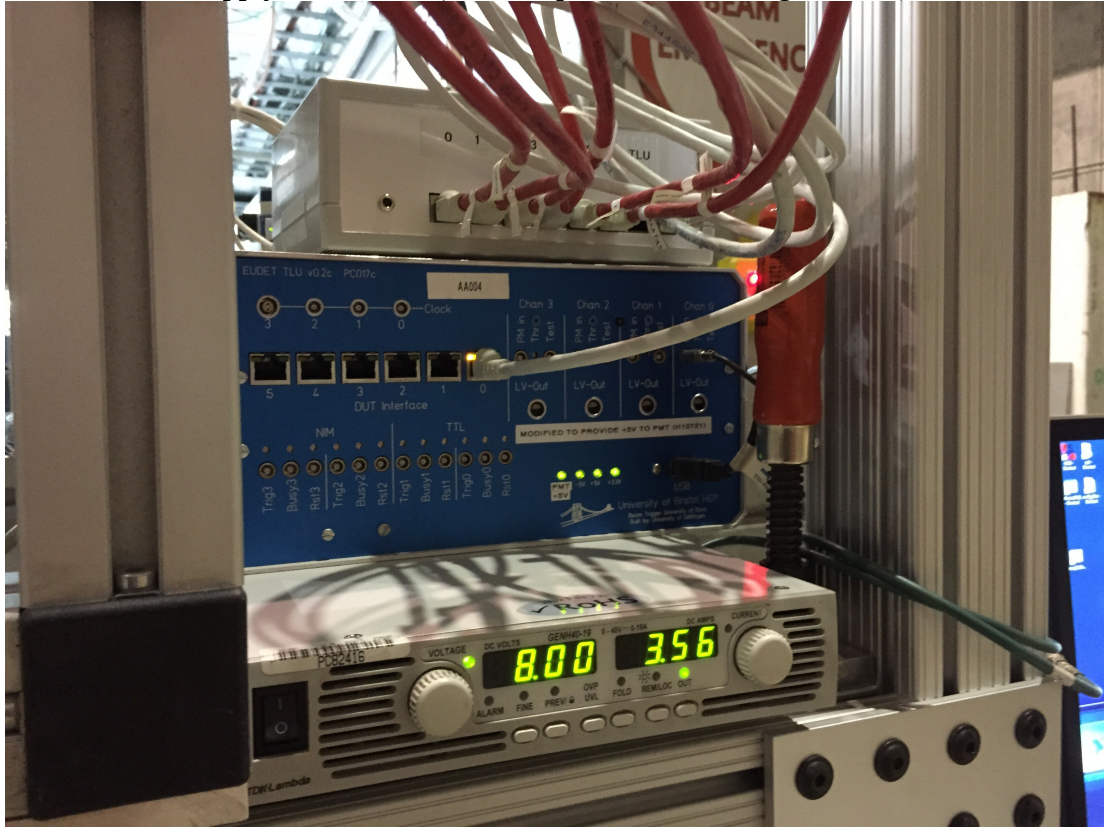

Beam on sensor 2 as example shows the profile

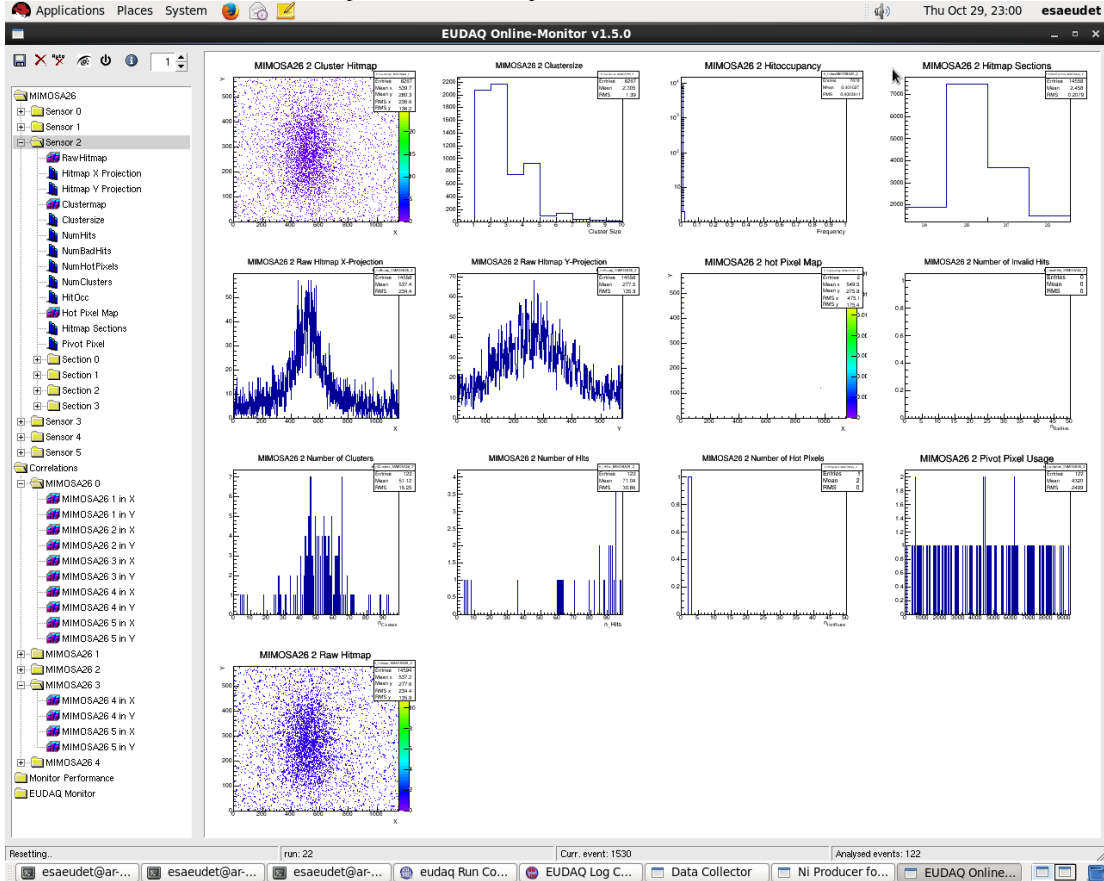

Correlation plots from Sensor 0 to all others in x, y-Direction.

