

L0M04 Hybrid 2021

Hybrid baseline configuration tests

12 May 2021

Initial power supply readings after configuration with 'baseline_config_L0.xml':

4/4 APVs Synced


(V) | (A)

AVDD: 2.50 | 0.379


DVDD: 2.50 | 0.257

V125: 1.25 | 0.238


FPGA: 5.51 | 1.14

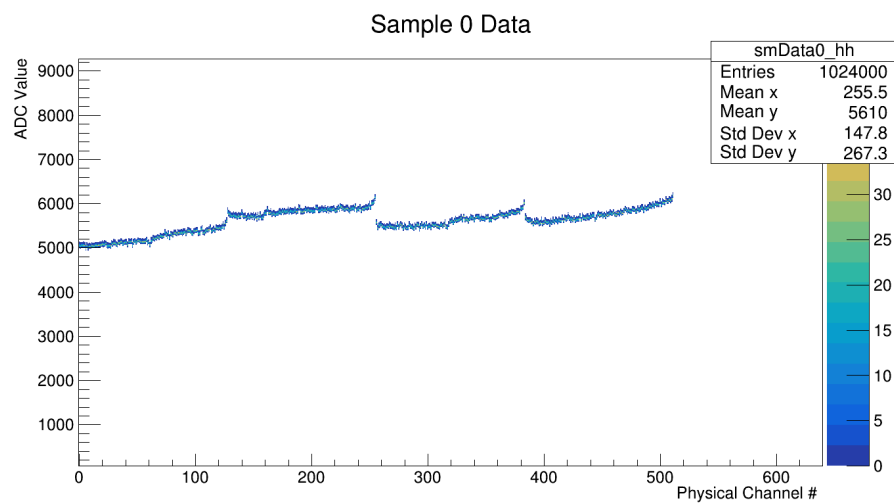

Sample 3 Data

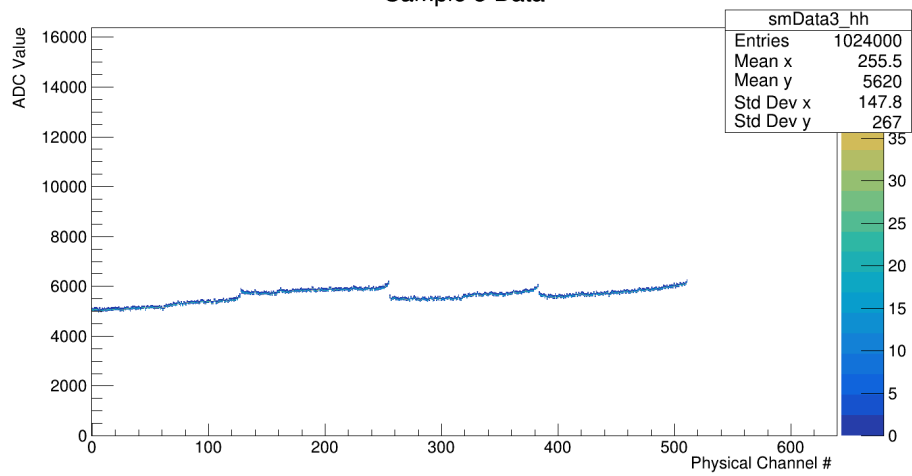

Sample 3 Noise

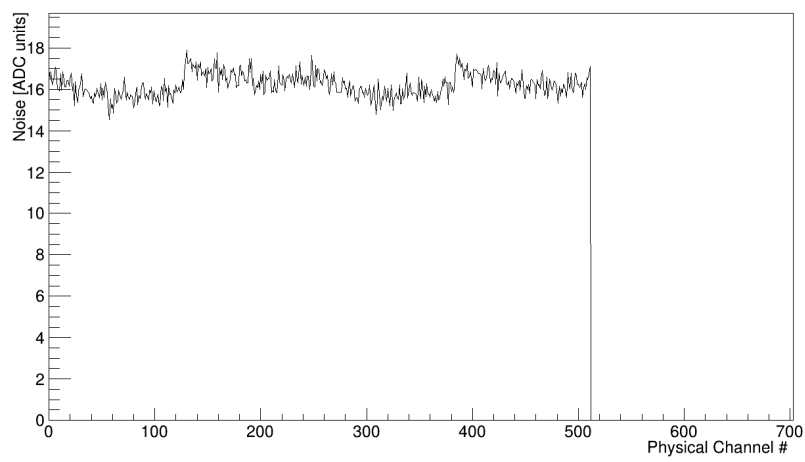

Hybrid icalScan test:

Sample 3 Data

