

L0M16 Hybrid 2021

Hybrid Baseline Configuration Tests

19 May 2021

L0M16 Hybrid baseline_config Test:

Power supply readings after loading baseline_config_L0.xml

4/4 APVs Synced

(V) | (A)




AVDD: 2.50 | 0.283

DVDD: 2.50 | 0.255

V125: 1.25 | 0.228

FPGA: 5.52 | 1.17

Baseline config run successful.

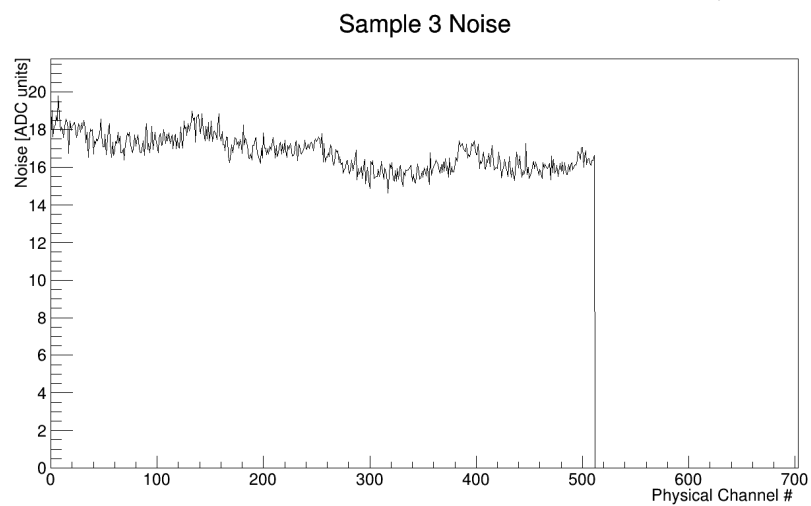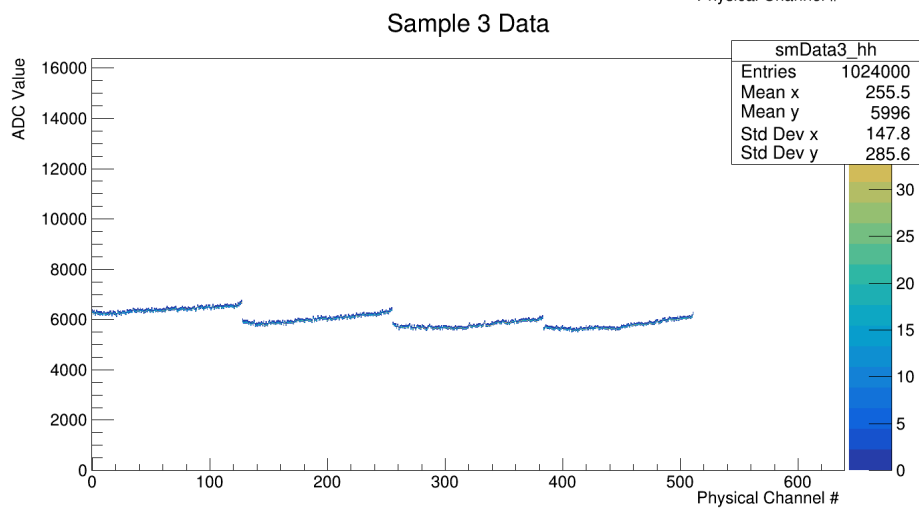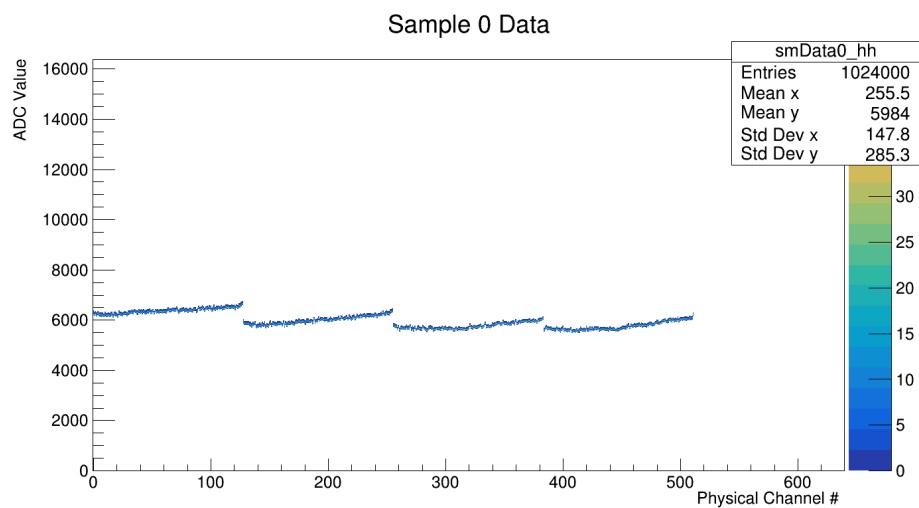

LOM16 hybrid icalScal:

Successful at 120Hz scan

Sample 3 Data

